




**HAVELLS**



HOME ART LIGHTS

**Light up in style.**

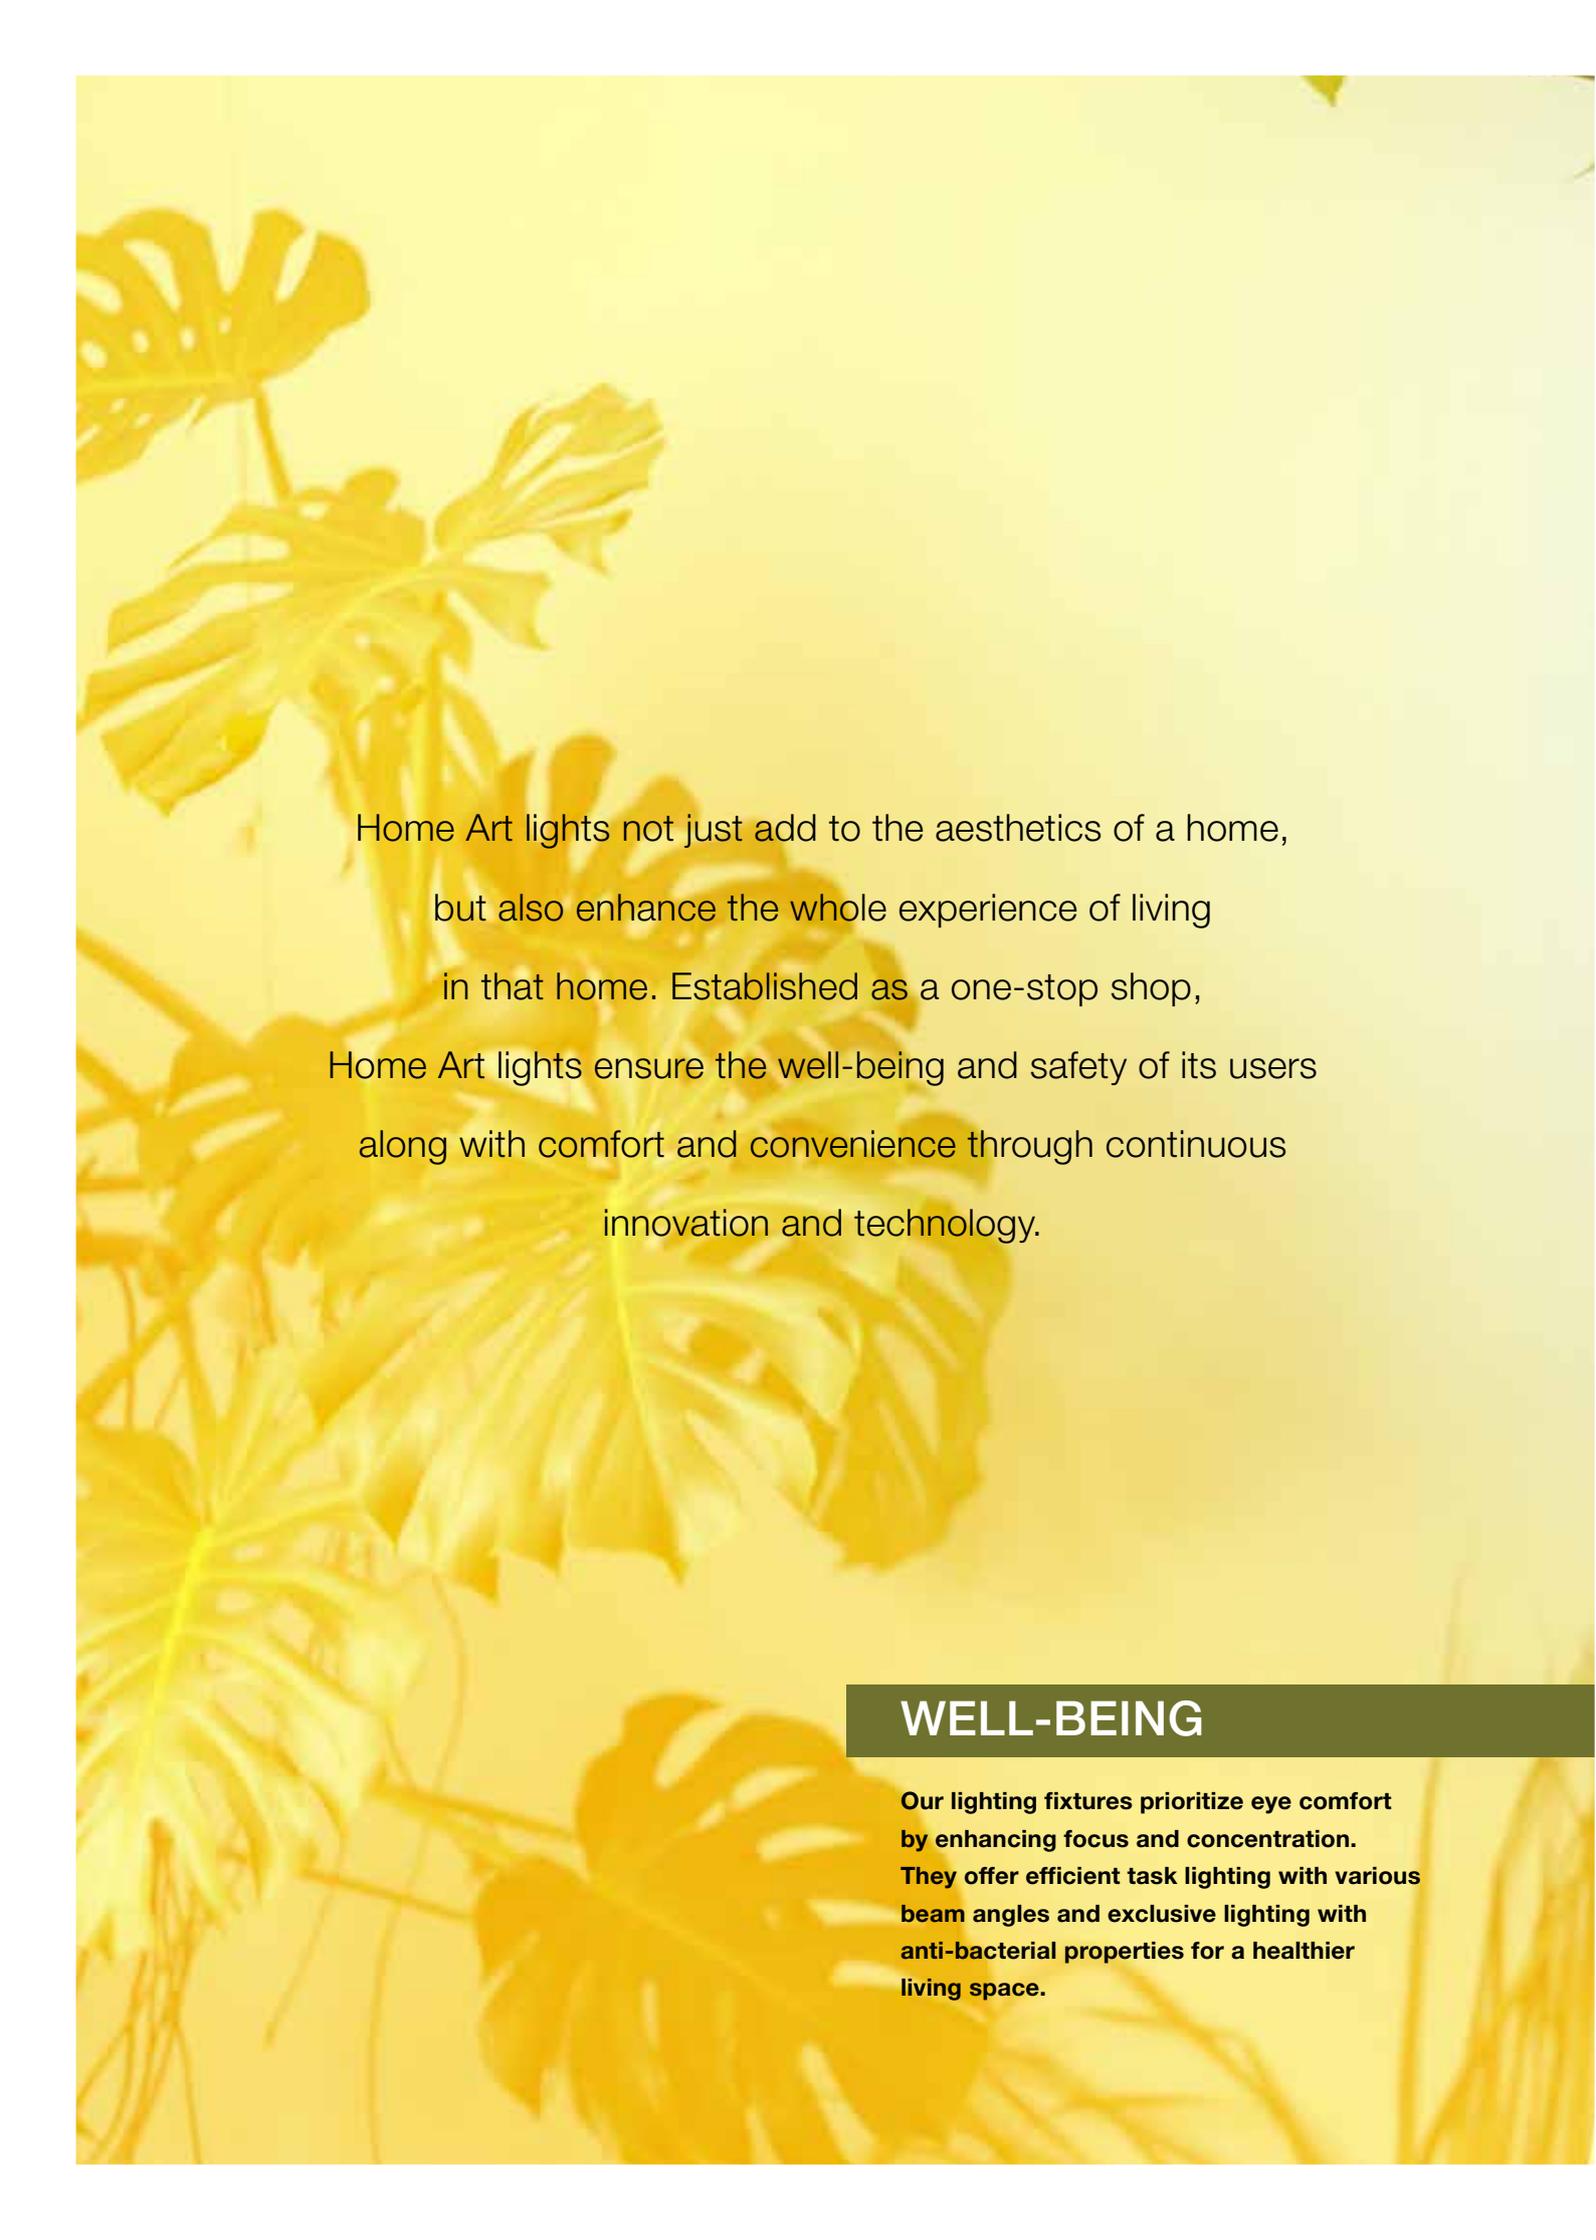

Home Art lights not just add to the aesthetics of a home, but also enhance the whole experience of living in that home. Established as a one-stop shop, Home Art lights ensure the well-being and safety of its users along with comfort and convenience through continuous innovation and technology.

## WELL-BEING

**Our lighting fixtures prioritize eye comfort by enhancing focus and concentration. They offer efficient task lighting with various beam angles and exclusive lighting with anti-bacterial properties for a healthier living space.**



## COMFORT

**Our lights are easy to install and offer flexible dimming options for adjusting light tones. The accent lighting adds style and drama by enhancing each corner of your home.**


## AESTHETICS


**Our simple and minimalistic designs are specially curated to match all kinds of decors. They offer a choice of reflectors that blend with the architectural design, seamlessly integrating into the ceiling for a focused lighting experience.**



## HOME ART LIGHTS

The Havells range of Home Art Lights are so aesthetically superior that you will be mesmerized by their beauty. Whether you turn them off or on; keep beauty switched on forever in your home. The range, designed keeping in mind the exquisite tastes & preferences of consumers, has something for your every desire. From intricate and ornate to minimal contemporary designs, Home Art Lights serve to uplift the decor of any room they are placed in.

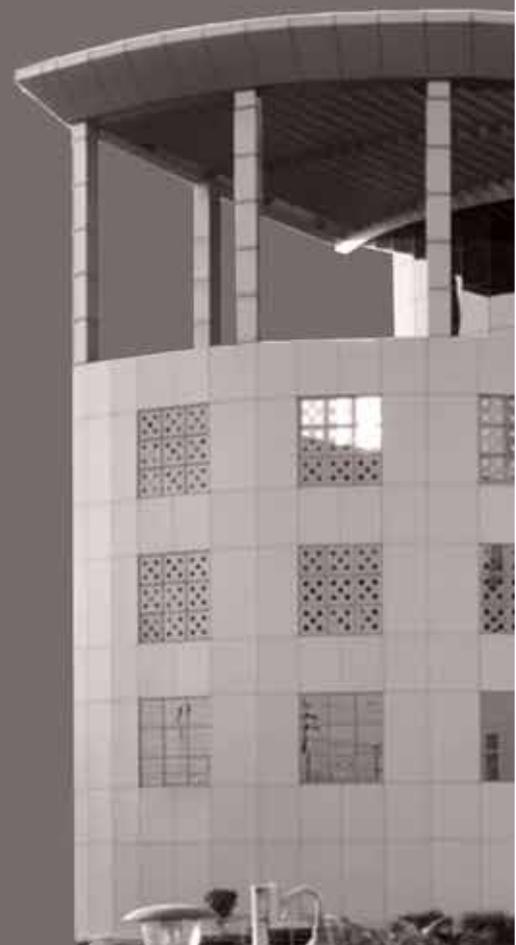

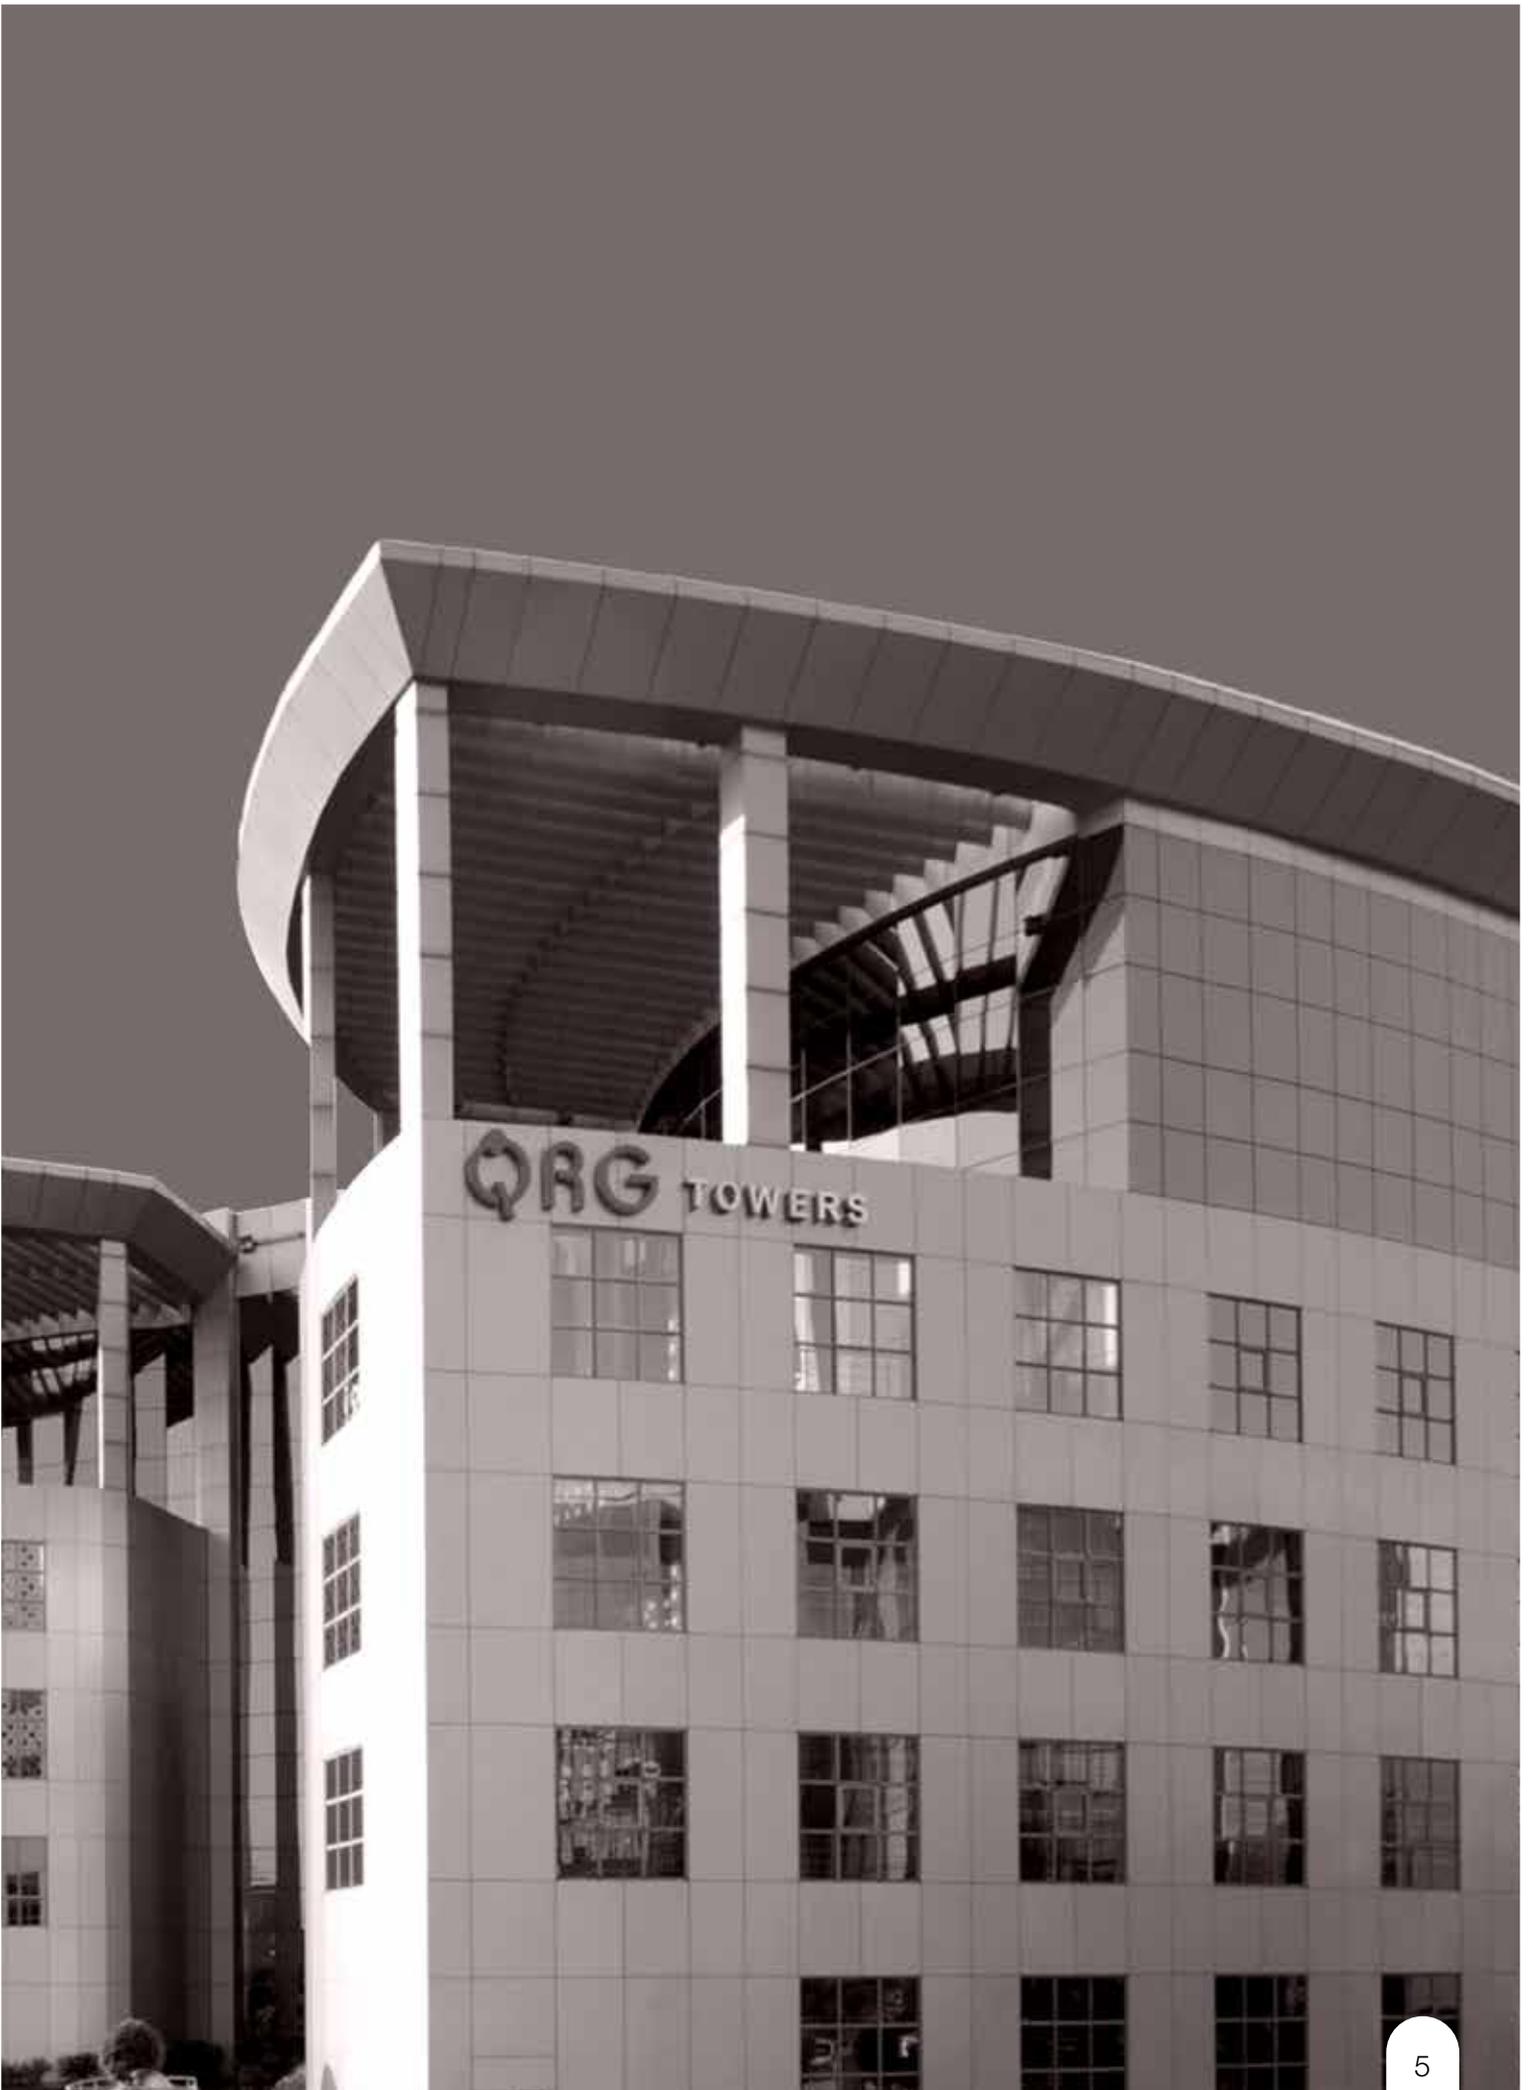

# CONTENTS



Esperanza Ring Spot light  
08-19



Spotshine Linear Light  
20-23



Minos Trimless Spotlight  
24-27



Minos SpotLight  
28-31



Azstro Downlight White  
32-35



Azstro Downlight Black  
36-37



Azstro Spotlight  
38-41



Azstro IP 65 Downlight  
42-45



Azstro IP65 Fixed Downlight  
46-47



Arica Spotlight  
48-51



Azar Spotlight  
52-55



Empiria Spotlight  
56-59



Floures surface Spotlight  
60-63



Unispot / Duospot Surface  
Spotlight 64-67



Luminato Panel  
68-71



Luminato Deep Recess  
Downlighter 72-75



Olivia LED Spot Light  
76-79



Spotshine Magnetic Track  
80-83



Spotshine Magnetic Track  
Light 84-93



Streak Tracklight  
94-97




Compatibility Chart  
98-99



Ebact Cabinet Light  
100-111



Compatibility Chart  
112-113

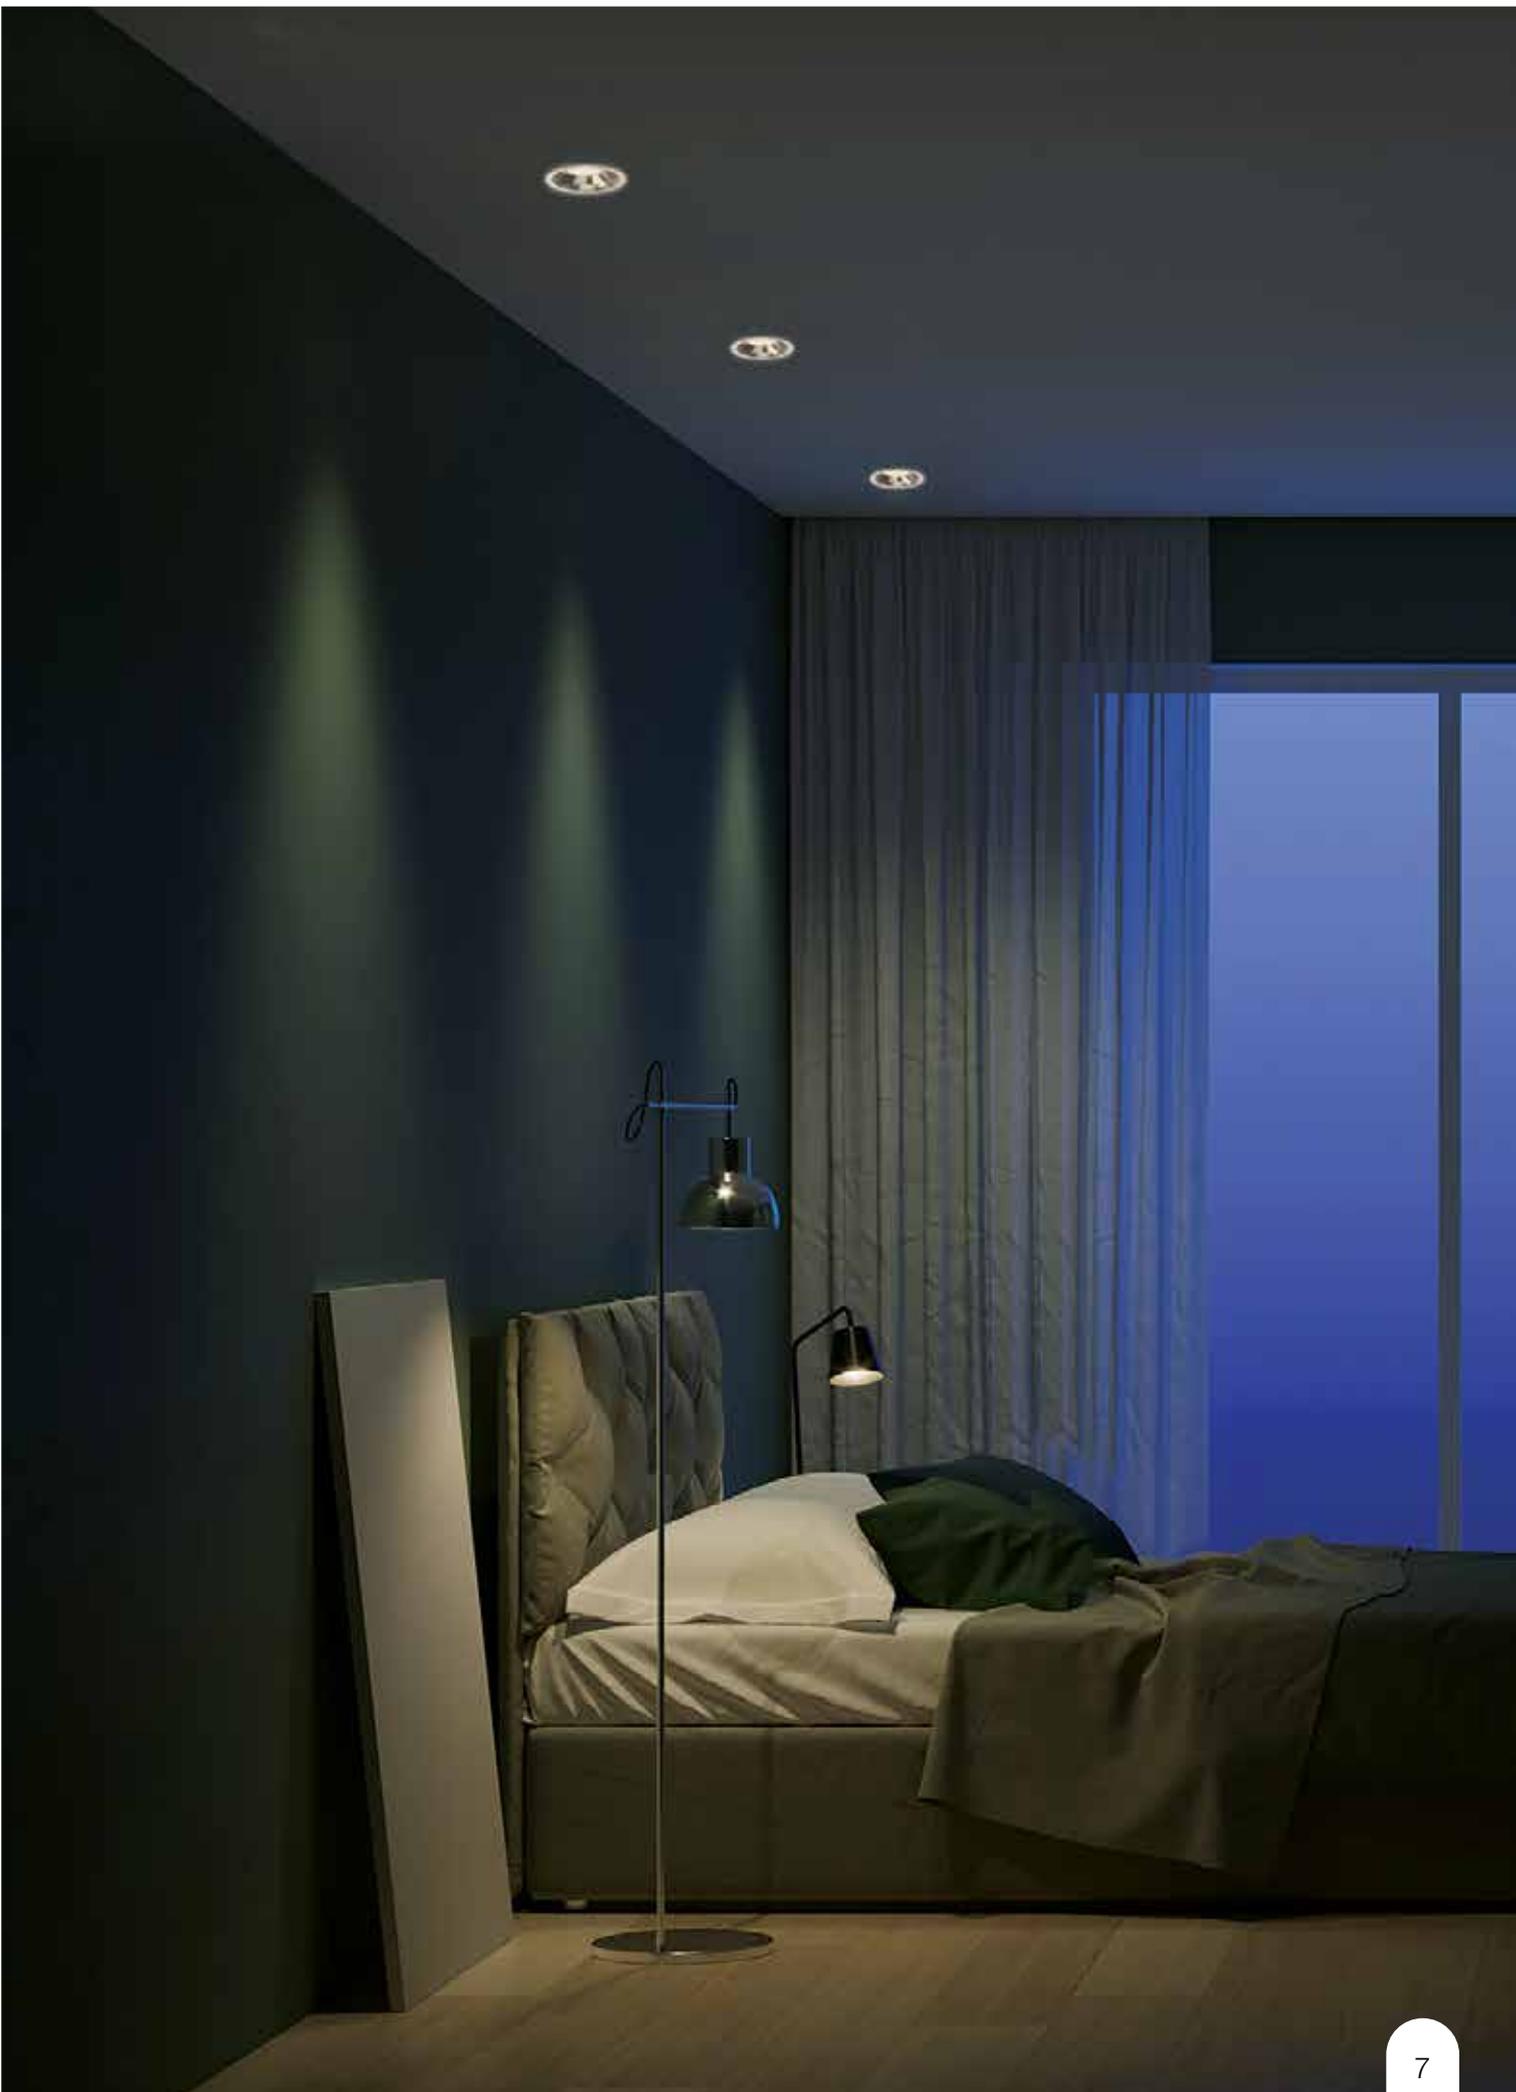

ESPERANZA RING SPOT LIGHT





# ESPERANZA RING SPOT LIGHT




Premium category of Spot light attachment with compact design, round profile housing that seamlessly merges with the ceiling. Its great colour and light quality adds value to your home décor.

## TECHNICAL DATA

Ordering Code	System Power (W)	Power Factor	Colour Temp. (CCT)	CRI	System Lumens (lm)	Colour of Fixture	Beam Angle (°)	UGR	Whole Sale (No.of unit/s)	Master Packing (No.of unit/s)
LHEEBBPBPG1W008	8 W	≥0.90	3000 K	≥80	680 lm	White	34°	<11	8 N	24 N
LHEEBBPDPG1W008	8 W	≥0.90	4000 K	≥80	720 lm	White	34°	<11	8 N	24 N

All fixtures are suitable for 240 V

## TECHNICAL DRAWING

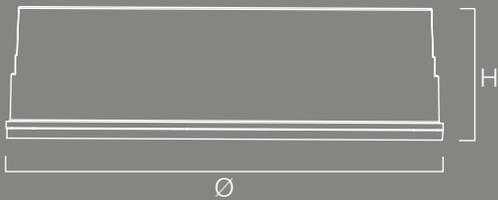


## DIMENSIONS

System Power	Ø	Height (h)	Cutout Size
8 W	80 mm	35 mm	75 mm

All dimensions are in mm | Tolerance: ± 2 mm

## AVAILABLE REFLECTOR DEG.



## PRODUCT SPECIFICATIONS

### FEATURES

- Premium design that merges with ceiling
- Effective heat sink design
- Reflector optics to create intense light beam

### APPLICATIONS

Modern Homes  
Restaurants  
Hotel Lobbies  
Retail Showrooms

# ESPERANZA RING SPOT LIGHT



AVAILABLE IN **3**  
COMBINATIONS



Eye Soft  
Technology


Premium category of Spot light with compact design, round profile housing that seamlessly merges with the ceiling. Its great colour and light quality adds value to your home décor.

## TECHNICAL DATA

Ordering Code	System Power (W)	Power Factor	Colour Temp. (CCT)	CRI	System Lumens (lm)	Colour of Fixture	Beam Angle (°)	UGR	Whole Sale (No.of unit/s)	Master Packing (No.of unit/s)
LHEEBBPBPG1W015	15 W	≥0.90	3000 K	≥80	1280 lm	White	34°	<11	6 N	24 N
LHEEBBPDPG1W015	15 W	≥0.90	4000 K	≥80	1350 lm	White	34°	<11	6 N	24 N

All fixtures are suitable for 240 V

## TECHNICAL DRAWING

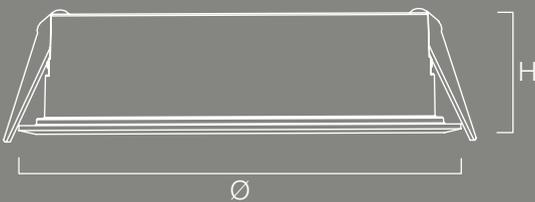

## DIMENSIONS

System Power	Ø	Height (h)	Cutout Size
15 W	128 mm	35 mm	120 mm

All dimensions are in mm | Tolerance: ± 2 mm

## COVER ATTACHMENT

System Power	Product Description	Case lot No. of unit/s
LSSLNW0273	ESPERANZA Ring Spot Cover Attachment 15W	24 N

## AVAILABLE REFLECTOR DEG.



## PRODUCT SPECIFICATIONS

### FEATURES

- Premium design that merges with ceiling
- Effective heat sink design
- Reflector optics to create intense light beam

### APPLICATIONS

Modern Homes  
Restaurants  
Hotel Lobbies  
Retail Showrooms

# ESPERANZA RING SPOT LIGHT

## 1st COMBINATION



Ring Spot light + DOWNLIGHT

## 2nd COMBINATION



Ring Spot light + DOWNLIGHT

## 3rd COMBINATION



Ring Spot light + DOWNLIGHT




Premium category of Spot light attachment with compact design, sleek housing that seamlessly merges with the ceiling. Its great colour and light quality adds value to your home décor.

## TECHNICAL DATA

Ordering Code	System Power (W)	Power Factor	Colour Temp. (CCT)	CRI	System Lumens (lm)	Colour of Fixture	Beam Angle (°)	UGR	Whole Sale (No. of unit/s)	Master Packing (No. of unit/s)
<b>1st Combination</b>										
LSSLNW0260	8 W	≥0.90	3000 K	≥80	680 lm	White	34°	<11	6 N	24 N
LSSLNW0259	8 W	≥0.90	4000 K	≥80	720 lm	White	34°	<11	6 N	24 N
<b>2nd Combination</b>										
LSSLNW0264	8 W	≥0.90	3000 K	≥80	400 lm	White	34°	<11	8 N	24 N
LSSLNW0263	8 W	≥0.90	4000 K	≥80	420 lm	White	34°	<11	8 N	24 N
<b>3rd Combination</b>										
LSSLNW0266	7 W	≥0.90	3000 K	≥80	465 lm	White	110°	-	6 N	24 N
LSSLNW0265	7 W	≥0.90	4000 K	≥80	490 lm	White	110°	-	6 N	24 N

All fixtures are suitable for 240 V

## TECHNICAL DRAWING

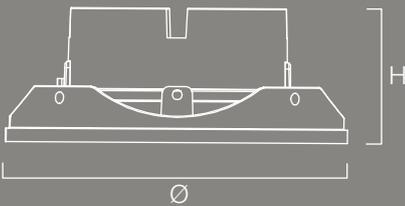


## DIMENSIONS

System Power	Ø	Height (h)
8 W (1st Comb.)	70 mm	35 mm
8 W (2nd Comb.)	70 mm	56 mm
7 W	70 mm	42 mm

All dimensions are in mm | Tolerance: ± 2 mm

## AVAILABLE REFLECTOR DEG.



## PRODUCT SPECIFICATIONS

### FEATURES

- Premium design that merges with ceiling
- Effective heat sink design
- Reflector optics to create intense light beam

### APPLICATIONS

Modern Homes  
Restaurants  
Hotel Lobbies  
Retail Showrooms

# ESPERANZA RING SPOT LIGHT



AVAILABLE IN **3**  
COMBINATIONS



Eye Soft  
Technology


Premium category of Spot light with compact design, round profile housing that seamlessly merges with the ceiling. Its great colour and light quality adds value to your home décor.

## TECHNICAL DATA

Ordering Code	System Power (W)	Power Factor	Colour Temp. (CCT)	CRI	System Lumens (lm)	Colour of Fixture	Beam Angle (°)	UGR	Whole Sale (No.of unit/s)	Master Packing (No.of unit/s)
LHEEBBPBPG1W020	20 W	≥0.90	3000 K	≥80	1900 lm	White	34°	<11	8 N	24 N
LHEEBBPDPG1W020	20 W	≥0.90	4000 K	≥80	2000 lm	White	34°	<11	8 N	24 N

All fixtures are suitable for 240 V

## TECHNICAL DRAWING

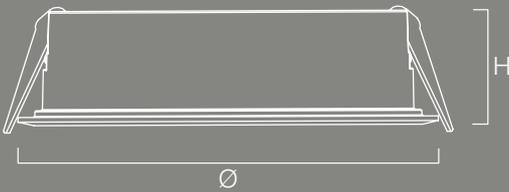

## DIMENSIONS


System Power	Ø	Height (h)	Cutout Size
20 W	173 mm	35 mm	165 mm

All dimensions are in mm | Tolerance: ± 2 mm

## COVER ATTACHMENT

System Power	Product Description	Case lot No. of unit/s
LSSLNW0274	ESPERANZA Ring Spot Cover Attachment 20 W	24 N

## AVAILABLE REFLECTOR DEG.



## PRODUCT SPECIFICATIONS

### FEATURES

- Premium design that merges with ceiling
- Effective heat sink design
- Reflector optics to create intense light beam

### APPLICATIONS

Modern Homes  
Restaurants  
Hotel Lobbies  
Retail Showrooms

# ESPERANZA RING SPOT LIGHT

## 1st COMBINATION



Ring Spot light + Downlight

## 2nd COMBINATION



Ring Spot light + Downlight

## 3rd COMBINATION



Ring Spot light + Downlight



Premium category of Spot light attachment with compact design, sleek housing that seamlessly merges with the ceiling. Its great colour and light quality adds value to your home décor.

## TECHNICAL DATA

Ordering Code	System Power (W)	Power Factor	Colour Temp. (CCT)	CRI	System Lumens (lm)	Colour of Fixture	Beam Angle (°)	UGR	Whole Sale (No. of unit/s)	Master Packing (No. of unit/s)
---------------	------------------	--------------	--------------------	-----	--------------------	-------------------	----------------	-----	----------------------------	--------------------------------

### 1st Combination

LHEEBBPBPG1W020	20 W	≥0.90	3000 K	≥80	1900 lm	White	34°	<11	8 N	24 N
LHEEBBPDPG1W020	20 W	≥0.90	4000 K	≥80	2000 lm	White	34°	<11	8 N	24 N
LSSLNW0262	15 W	≥0.90	3000 K	≥80	1280 lm	White	34°	<11	6 N	24 N
LSSLNW0261	15 W	≥0.90	4000 K	≥80	1350 lm	White	34°	<11	6 N	24 N
LSSLNW0260	8 W	≥0.90	3000 K	≥80	680 lm	White	110°	<11	6 N	24 N
LSSLNW0259	8 W	≥0.90	4000 K	≥80	720 lm	White	110°	<11	6 N	24 N

### 2nd Combination


LHEEBBPBPG1W020	20 W	≥0.90	3000 K	≥80	1900 lm	White	34°	<11	8 N	24 N
LHEEBBPDPG1W020	20 W	≥0.90	4000 K	≥80	2000 lm	White	34°	<11	8 N	24 N
LSSLNW0270	12 W	≥0.90	3000 K	≥80	630 lm	White	24°	<11	8 N	24 N
LSSLNW0269	12 W	≥0.90	4000 K	≥80	660 lm	White	24°	<11	8 N	24 N

### 3rd Combination

LHEEBBPBPG1W020	20 W	≥0.90	3000 K	≥80	1900 lm	White	34°	<11	8 N	24 N
LHEEBBPDPG1W020	20 W	≥0.90	4000 K	≥80	2000 lm	White	34°	<11	8 N	24 N
LSSLNW0268	10 W	≥0.90	3000 K	≥80	620 lm	White	110°	-	6 N	24 N
LSSLNW0267	10 W	≥0.90	4000 K	≥80	650 lm	White	110°	-	6 N	24 N

All fixtures are suitable for 240 V

## TECHNICAL DRAWING

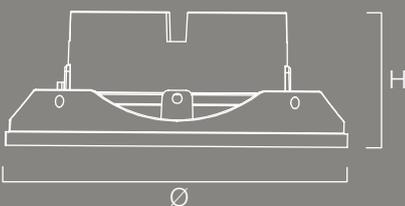


## DIMENSIONS

System Power	Ø	Height (h)
15 W	115 mm	35 mm
12 W	115 mm	77 mm
10 W	115 mm	46 mm
8 W	70 mm	35 mm

All dimensions are in mm | Tolerance: ± 2 mm

## AVAILABLE REFLECTOR DEG.



## PRODUCT SPECIFICATIONS


### FEATURES


- Premium design that merges with ceiling
- Effective heat sink design
- Reflector optics to create intense light beam

### APPLICATIONS


Modern Homes  
Restaurants  
Hotel Lobbies  
Retail Showrooms

# SPOTSHINE LINEAR LIGHT

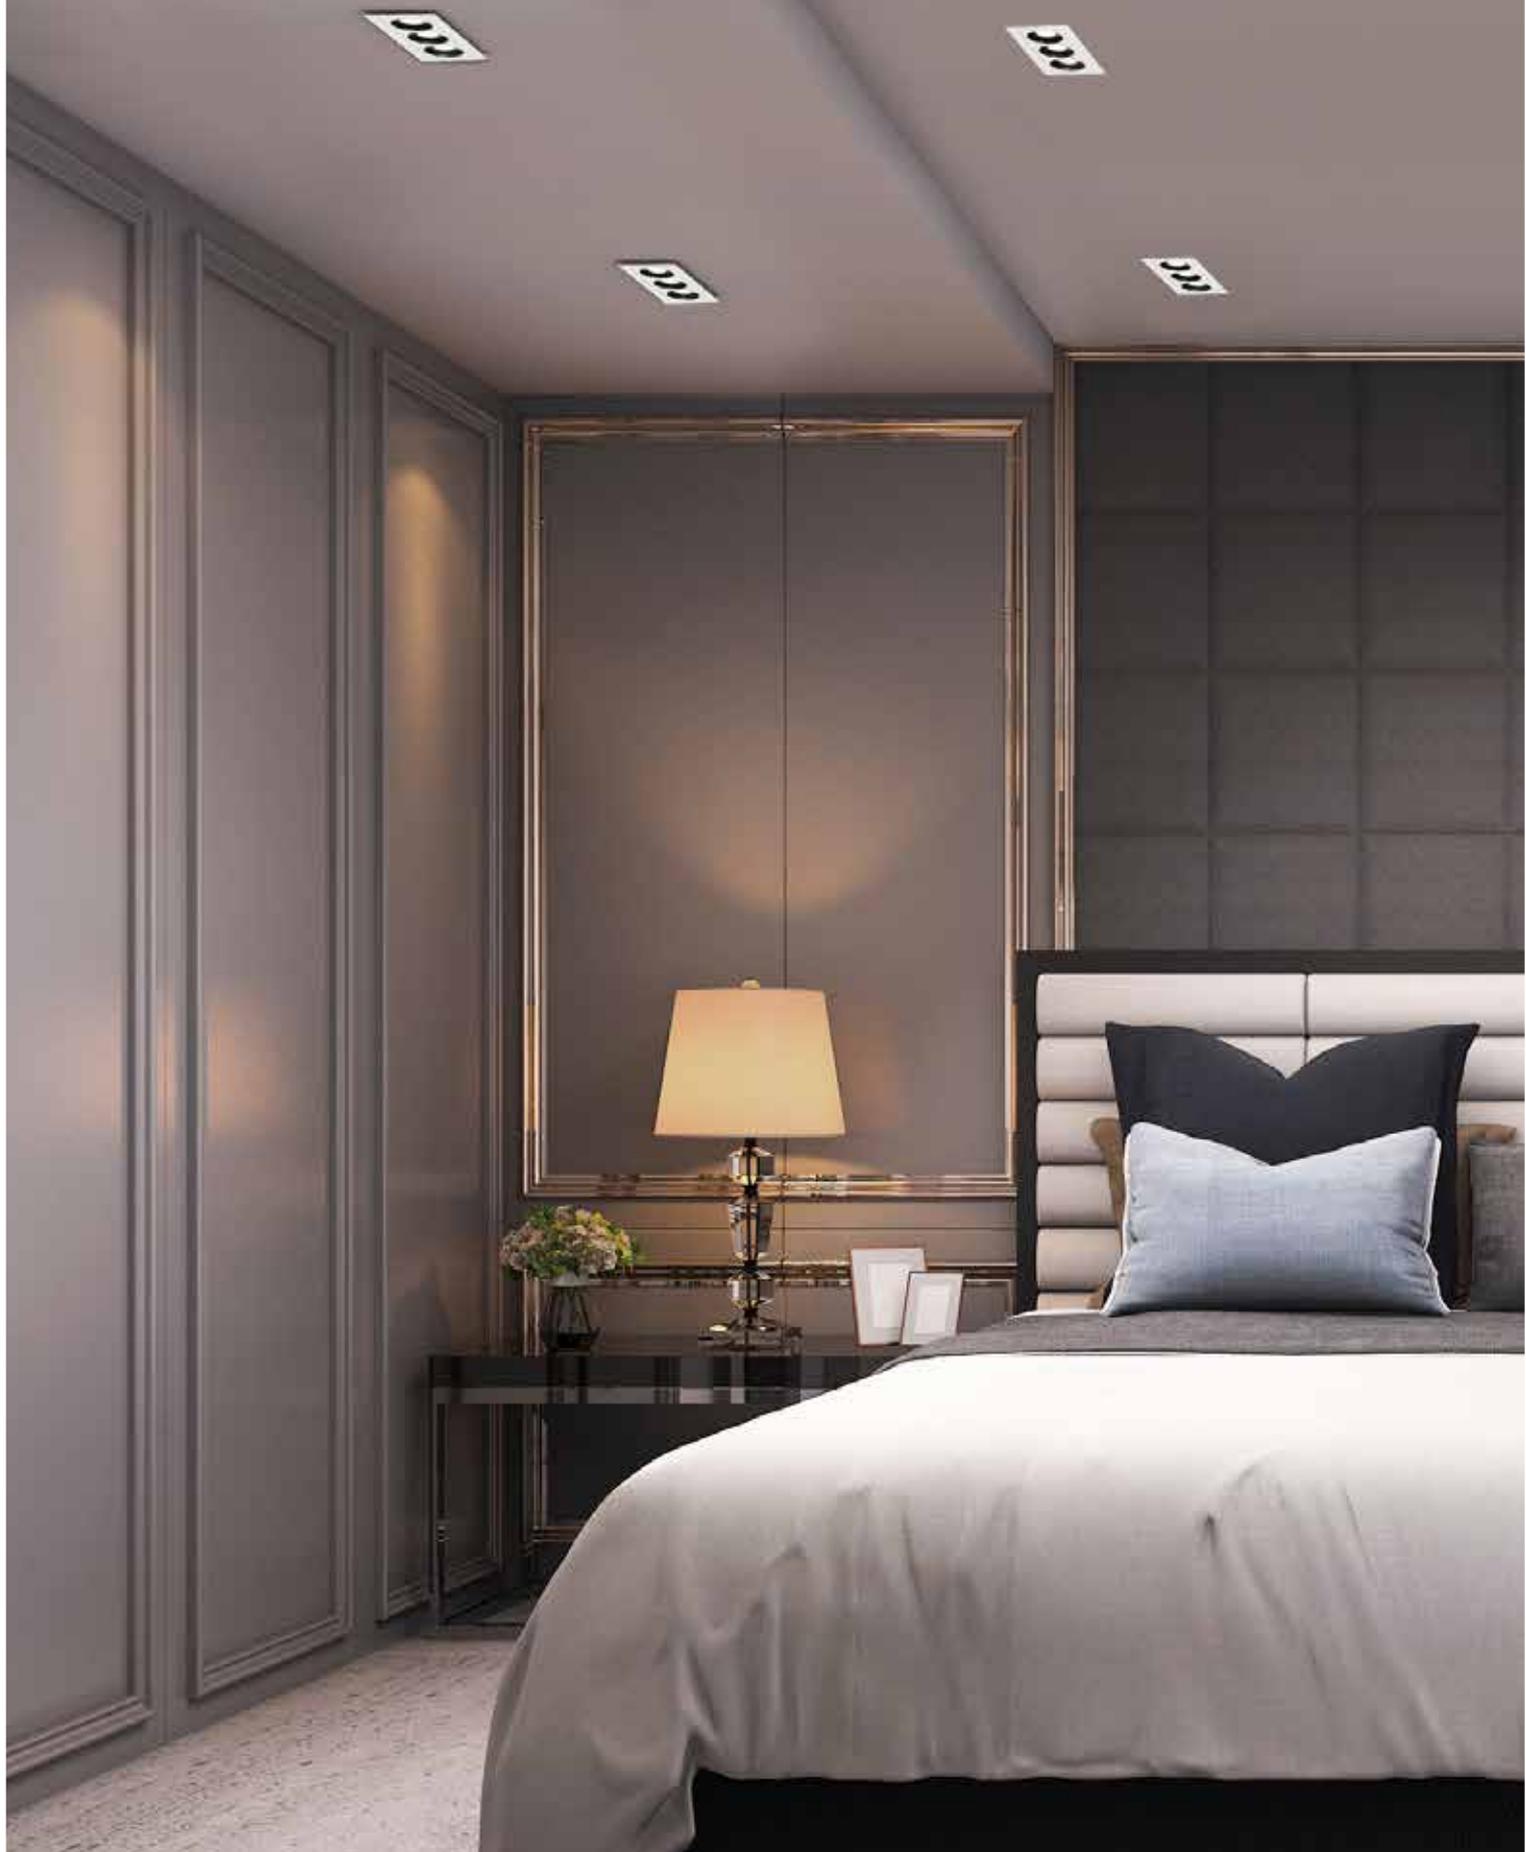

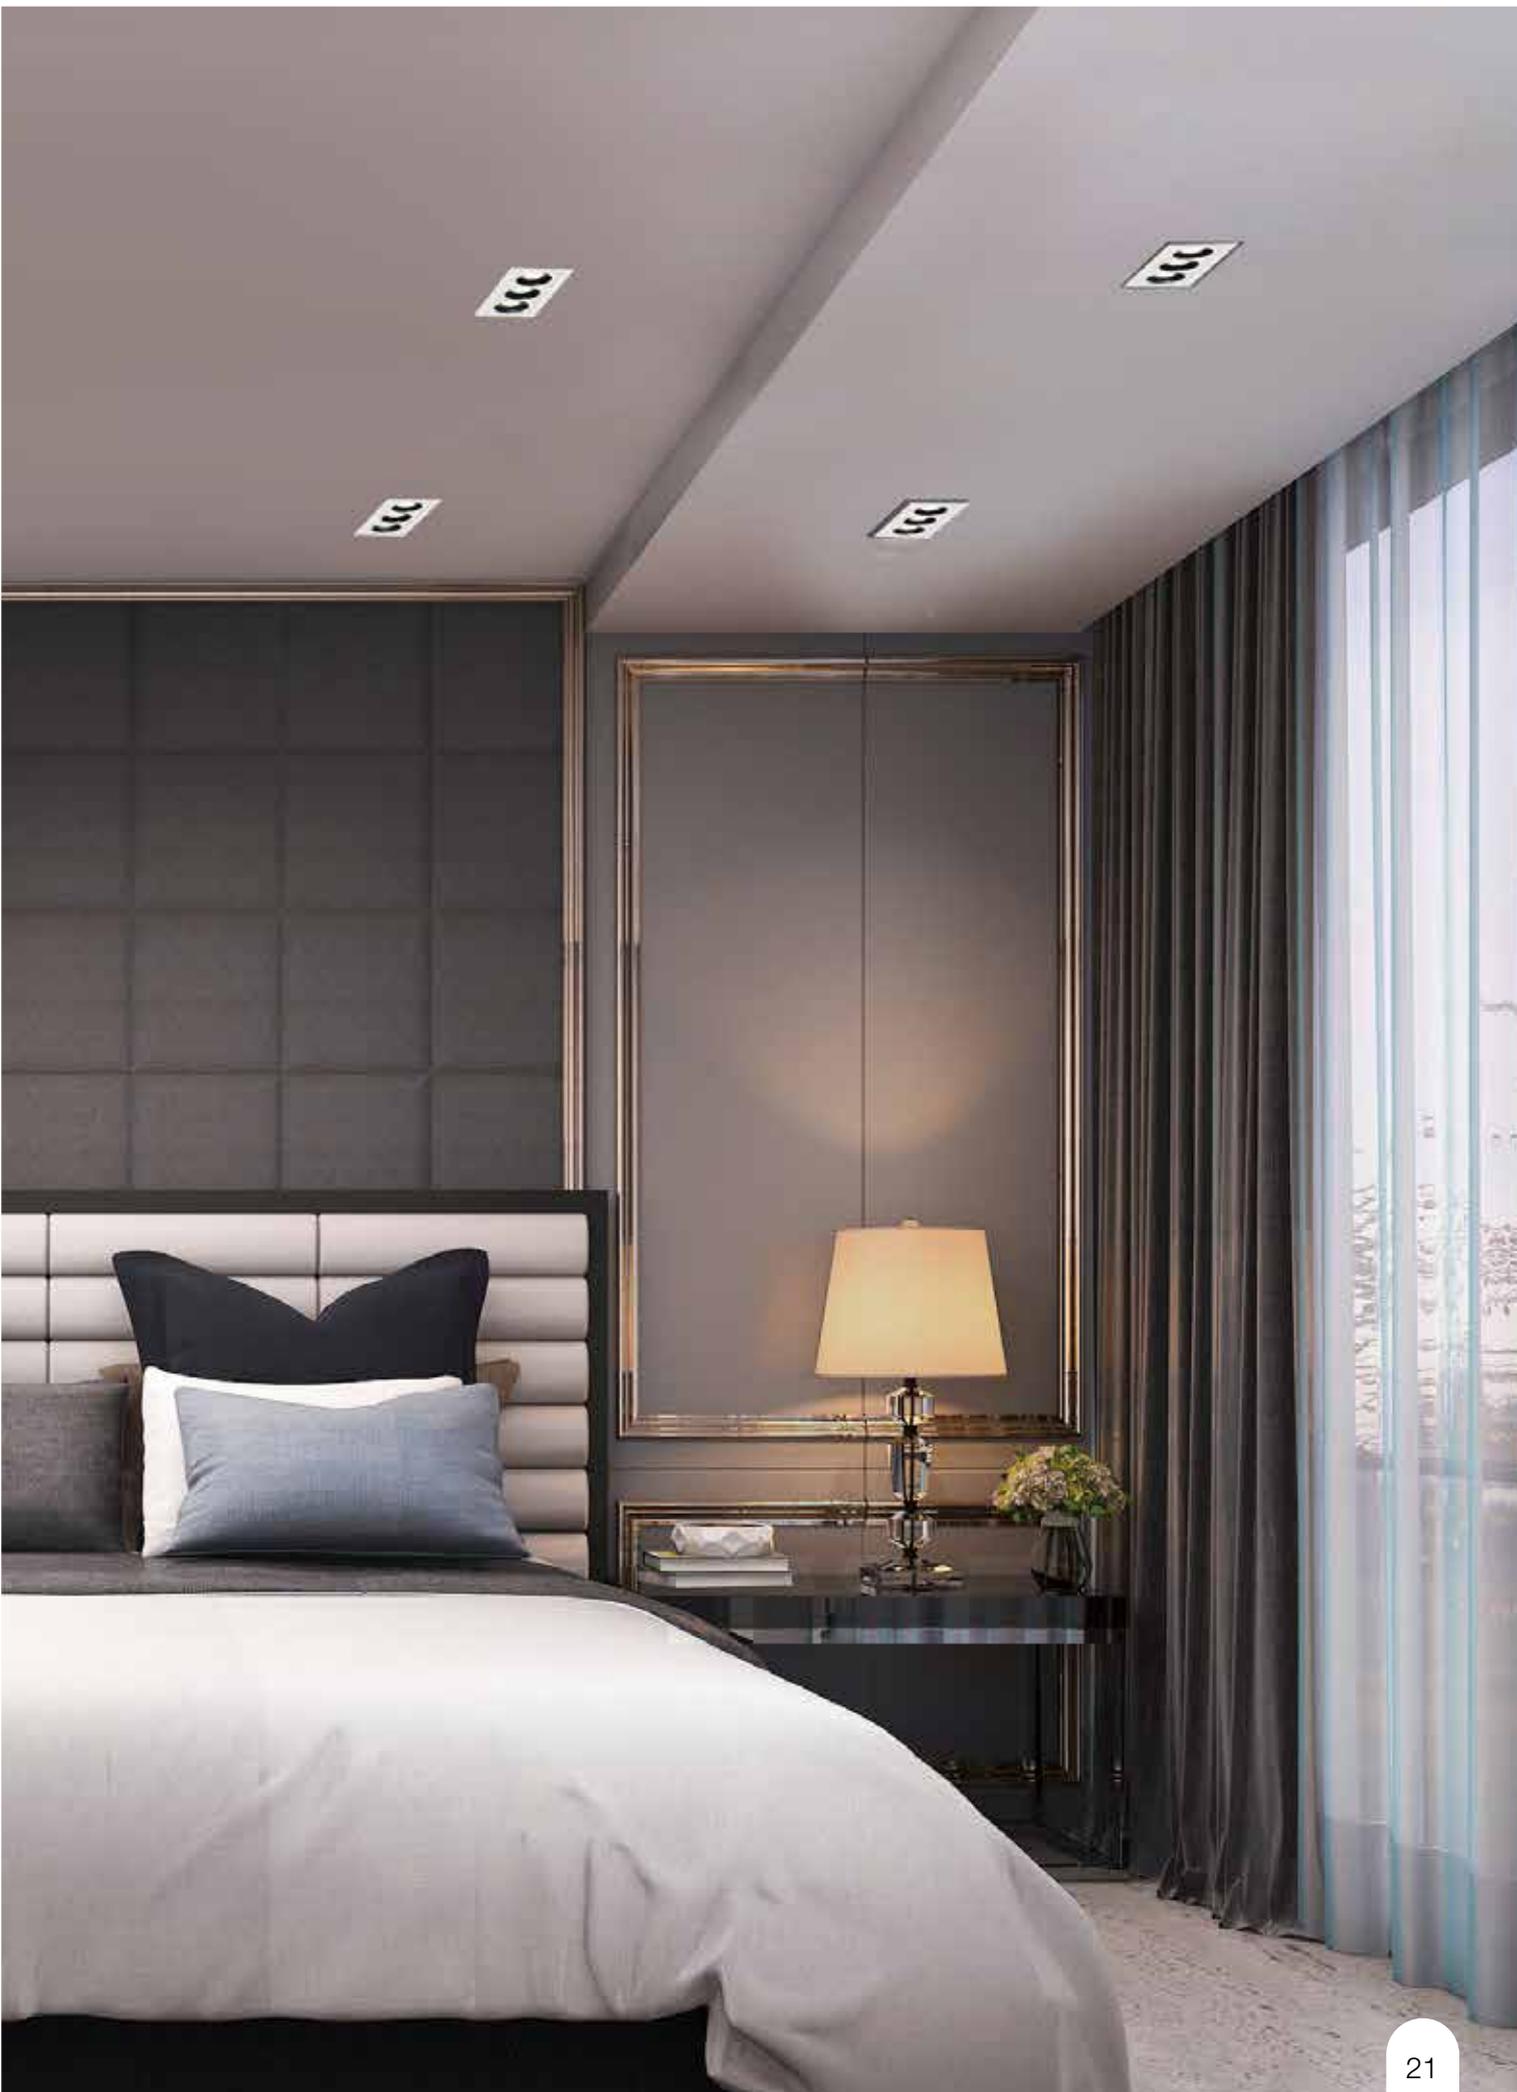

# SPOTSHINE LINEAR LIGHT

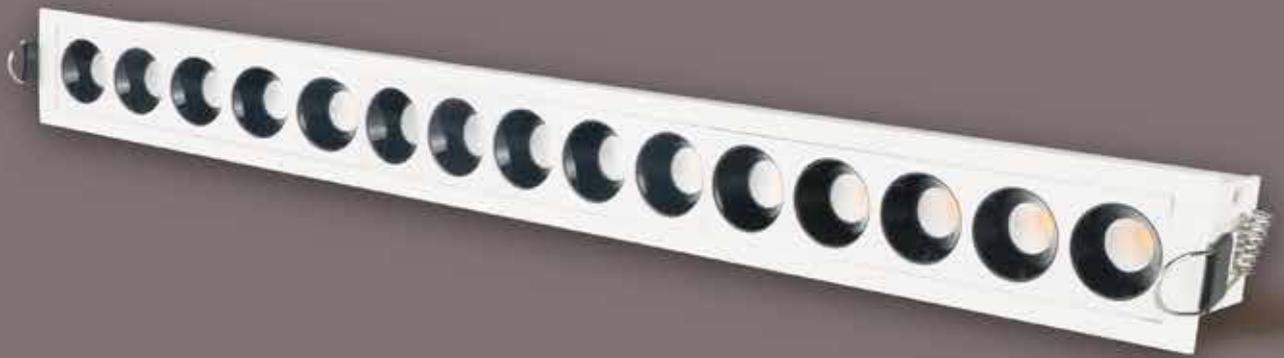

3 W



6 W



10 W



20 W



30 W




Premium category of LED linear light with compact design, linear profile that seamlessly merges with the ceiling. Its great colour and light quality adds value to your home décor.

## TECHNICAL DATA

Ordering Code	System Power (W)	Power Factor	THD %	Colour Temp. (CCT)	CRI	System Lumens (lm)	Colour of Fixture	UGR	Whole Sale (No.of unit/s)	Master Packing (No.of unit/s)
LHEEAPPBPO1W003	3 W	≤0.5	<33%	3000 K	≥80	165 lm	White	<13	6 N	24 N
LHEEAPPDPO1W003	3 W	≤0.5	<33%	4000 K	≥80	165 lm	White	<13	6 N	24 N
LHEEAPPRPO1W006	6 W	≤0.5	<33%	3000 K	≥80	540 lm	White	<13	6 N	24 N
LHEEAPTPO1W006	6 W	≤0.5	<33%	4000 K	≥80	540 lm	White	<13	6 N	24 N
LHEEAPPAPO1W010	10 W	≤0.5	<33%	3000 K	≥80	900 lm	White	<19	6 N	24 N
LHEEAPPEPO1W010	10 W	≤0.5	<33%	4000 K	≥80	900 lm	White	<19	6 N	24 N
LHEEAPP5PO1W020	20 W	≤0.5	<33%	3000 K	≥80	1900 lm	White	-	4 N	24 N
LHEEAPP6PO1W020	20 W	≤0.5	<33%	4000 K	≥80	1900 lm	White	-	4 N	24 N
LHEEAPP5PO1W030	30 W	≤0.5	<33%	3000 K	≥80	2700 lm	White	-	4 N	24 N
LHEEAPP6PO1W030	30 W	≤0.5	<33%	4000 K	≥80	2700 lm	White	-	4 N	24 N

All fixtures are suitable for 240 V

## TECHNICAL DRAWING

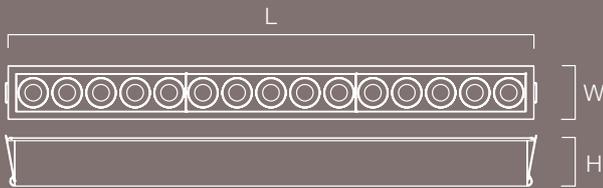

## DIMENSIONS

System Power	Length (l)	Width (w)	Height (h)	Cutout Size
3 W	43 mm	43 mm	38 mm	38 x 38 mm
6 W	93 mm	43 mm	38 mm	88 x 35 mm
10 W	145 mm	43 mm	38 mm	140 x 35 mm
20 W	278 mm	43 mm	38 mm	273 x 35 mm
30 W	412 mm	43 mm	38 mm	307 x 35 mm

All dimensions are in mm | Tolerance: ± 2 mm

## PRODUCT SPECIFICATIONS

### FEATURES

- Premium design that merges with ceiling
- Effective heat sink design
- Reflector optics to create intense light beam

### APPLICATIONS


Modern Homes  
Shopping Malls  
Restaurants  
Hotel Lobbies  
Retail Showrooms

# MINOS TRIMLESS SPOT LIGHT





# MINOS TRIMLESS SPOT LIGHT

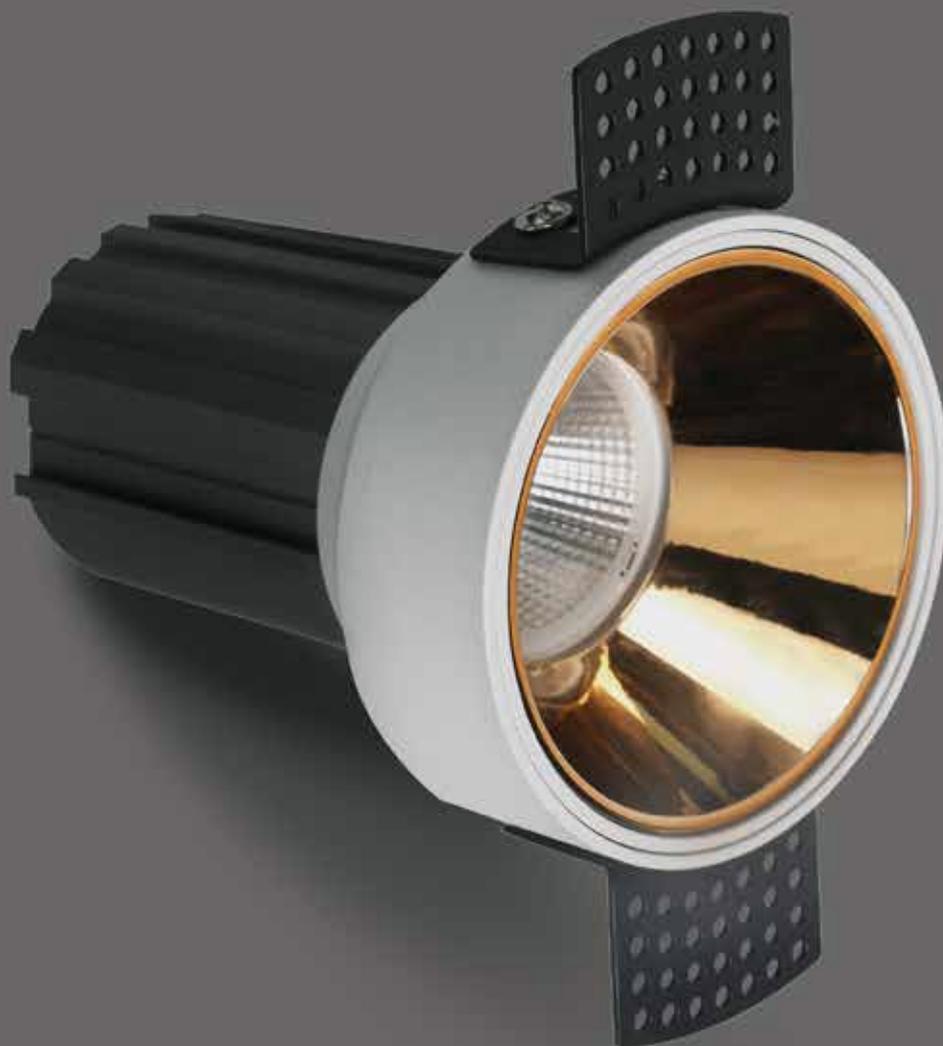

White



Chrome



Graphite




Premium category of COB spot light with compact design, trimless housing that seamlessly merges with the ceiling. Its great colour and light quality adds value to your home décor.

## TECHNICAL DATA

Ordering Code	System Power (W)	Power Factor	Colour Temp. (CCT)	CRI	System Lumens (lm)	Colour of Fixture	Beam Angle (°)	UGR	Whole Sale (No. of unit/s)	Master Packing (No. of unit/s)
LHEECBPBPG1W010	10 W	≥0.90	3000 K	≥80	760 lm	White	38°	<11	6 N	24 N
LHEECBPDPG1W010	10 W	≥0.90	4000 K	≥80	800 lm	White	38°	<11	6 N	24 N
LHEECBPBPG1W015	15 W	≥0.90	3000 K	≥80	1140 lm	White	38°	<11	6 N	24 N
LHEECBPDPG1W015	15 W	≥0.90	4000 K	≥80	1200 lm	White	38°	<11	6 N	24 N

All fixtures are suitable for 240 V

## TECHNICAL DRAWING

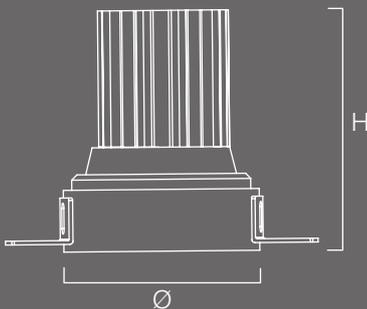

## DIMENSIONS

System Power	Ø	Height (h)	Cutout Size
10 W	76 mm	95 mm	80 mm
15 W	95 mm	108 mm	100 mm

All dimensions are in mm | Tolerance: ± 2 mm

## RING ATTACHMENT

System Power	Product Description	Case lot No. of unit/s
LSSLNW0275	MINOS TRIMLESS RING ATTACH 10W COB WHITE	60 N
LSSLNB0049	MINOS TRIMLESS RING ATTACH 10WCOB GRAPHITE	60 N
LSSLNC0023	MINOS TRIMLESS RING ATTACH 10WCOB CHROME	60 N
LSSLNW0276	MINOS TRIMLESS RING ATTACH 15W COB WHITE	60 N
LSSLNB0050	MINOS TRIMLESS RING ATTACH 15WCOB GRAPHITE	60 N
LSSLNC0024	MINOS TRIMLESS RING ATTACH 15WCOB CHROME	60 N

## AVAILABLE REFLECTOR DEG.



## PRODUCT SPECIFICATIONS


### FEATURES

- Premium design that merges with ceiling
- Effective heat sink design
- Reflector optics to create intense light beam
- Premium specular rose gold reflector
- Other reflector colour options: White/Chrome/Graphite

### APPLICATIONS

Modern Homes  
Shopping Malls  
Restaurants  
Hotel Lobbies  
Corporate Office

# MINOS SPOT LIGHT

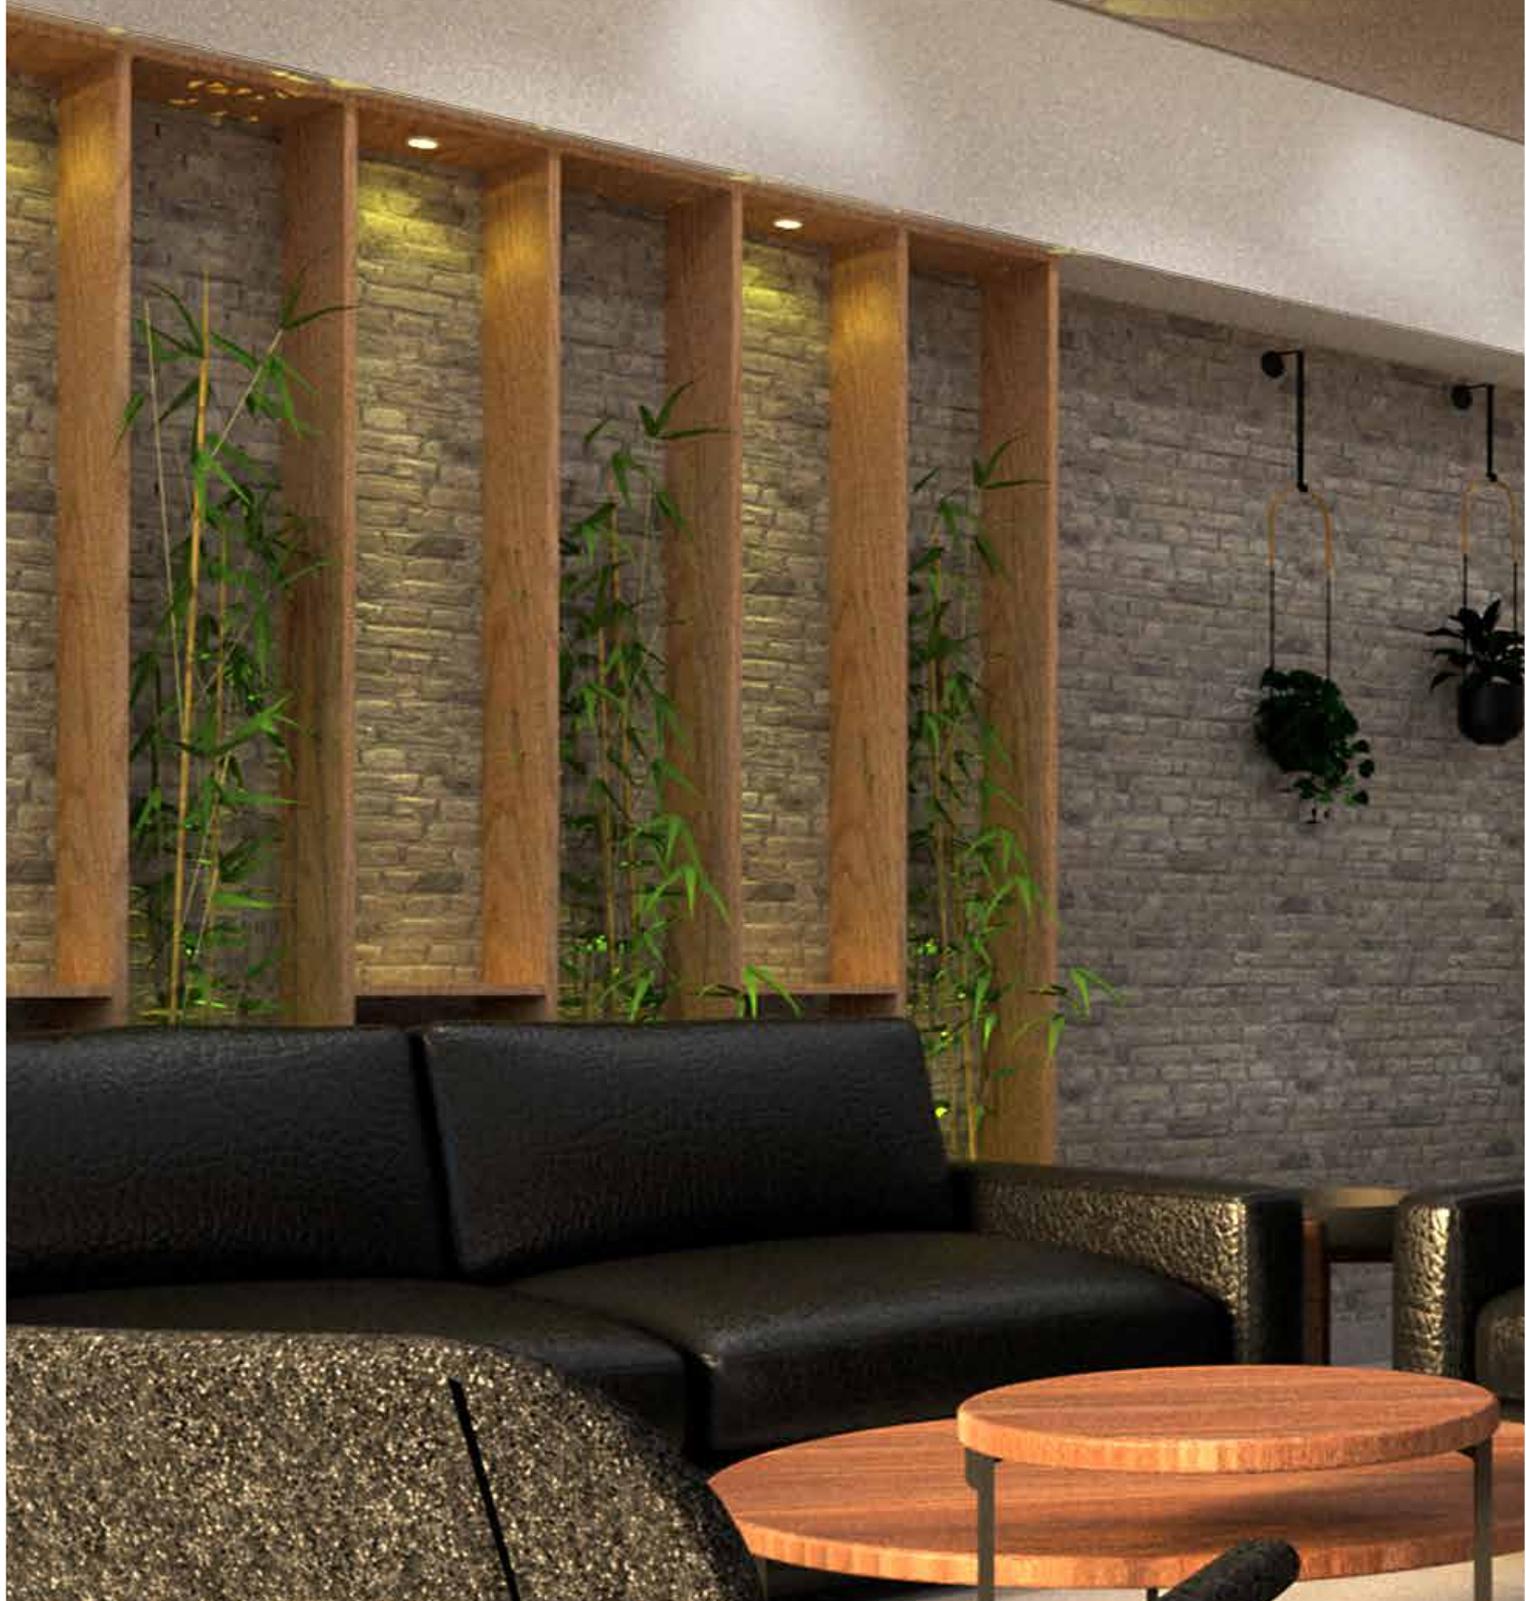



# MINOS SPOT LIGHT



White



Chrome



Graphite




Premium category of COB spot light with compact design, narrow trim housing profile that seamlessly merges with the ceiling. Its great colour and light quality adds value to your home décor.

## TECHNICAL DATA

Ordering Code	System Power (W)	Power Factor	Colour Temp. (CCT)	CRI	System Lumens (lm)	Colour of Fixture	Beam Angle (°)	UGR	Whole Sale (No. of unit/s)	Master Packing (No. of unit/s)
LHEECEPBPG1W007	7 W	≥0.90	3000 K	≥80	565 lm	White	24°	<11	8 N	24 N
LHEECEPDPG1W007	7 W	≥0.90	4000 K	≥80	595 lm	White	24°	<11	8 N	24 N
LHEECEPBPG1W012	12 W	≥0.90	3000 K	≥80	910 lm	White	38°	<11	6 N	24 N
LHEECEPDPG1W012	12 W	≥0.90	4000 K	≥80	960 lm	White	38°	<11	6 N	24 N
LHEECEPBPG1W020	20 W	≥0.90	3000 K	≥80	1520 lm	White	38°	<13	6 N	24 N
LHEECEPDPG1W020	20 W	≥0.90	3000 K	≥80	1600 lm	White	38°	<13	6 N	24 N

All fixtures are suitable for 240 V

## TECHNICAL DRAWING



## DIMENSIONS


System Power	Ø	Height (h)	Cutout Size
7 W	80 mm	85 mm	75 mm
12 W	80 mm	105 mm	75 mm
20 W	100 mm	128 mm	95 mm

All dimensions are in mm | Tolerance: ± 2 mm

## RING ATTACHMENT

System Power	Product Description	Case lot No. of unit/s
LSSLNW0277	MINOS RING ATTACHMENT 7 W COB WHITE	60 N
LSSLNB0051	MINOS RING ATTACHMENT 7 W COB GRAPHITE	60 N
LSSLNC0025	MINOS RING ATTACHMENT 7 W COB CHROME	60 N
LSSLNW0278	MINOS RING ATTACHMENT 12 W COB WHITE	60 N
LSSLNB0052	MINOS RING ATTACHMENT 12 W COB GRAPHITE	60 N
LSSLNC0026	MINOS RING ATTACHMENT 12 W COB CHROME	60 N
LSSLNW0279	MINOS RING ATTACHMENT 20 W COB WHITE	60 N
LSSLNB0053	MINOS RING ATTACHMENT 20 W COB GRAPHITE	60 N
LSSLNC0027	MINOS RING ATTACHMENT 20 W COB CHROME	60 N

## AVAILABLE REFLECTOR DEG.



## PRODUCT SPECIFICATIONS


### FEATURES


- Premium design that merges with ceiling
- Effective heat sink design
- Reflector optics to create intense light beam
- Premium specular rose gold reflector
- Other reflector colour options: White/Chrome/Graphite

### APPLICATIONS

Modern Homes  
Shopping Malls  
Restaurants  
Hotel Lobbies  
Corporate Office

# AZSTRO DOWNLIGHT

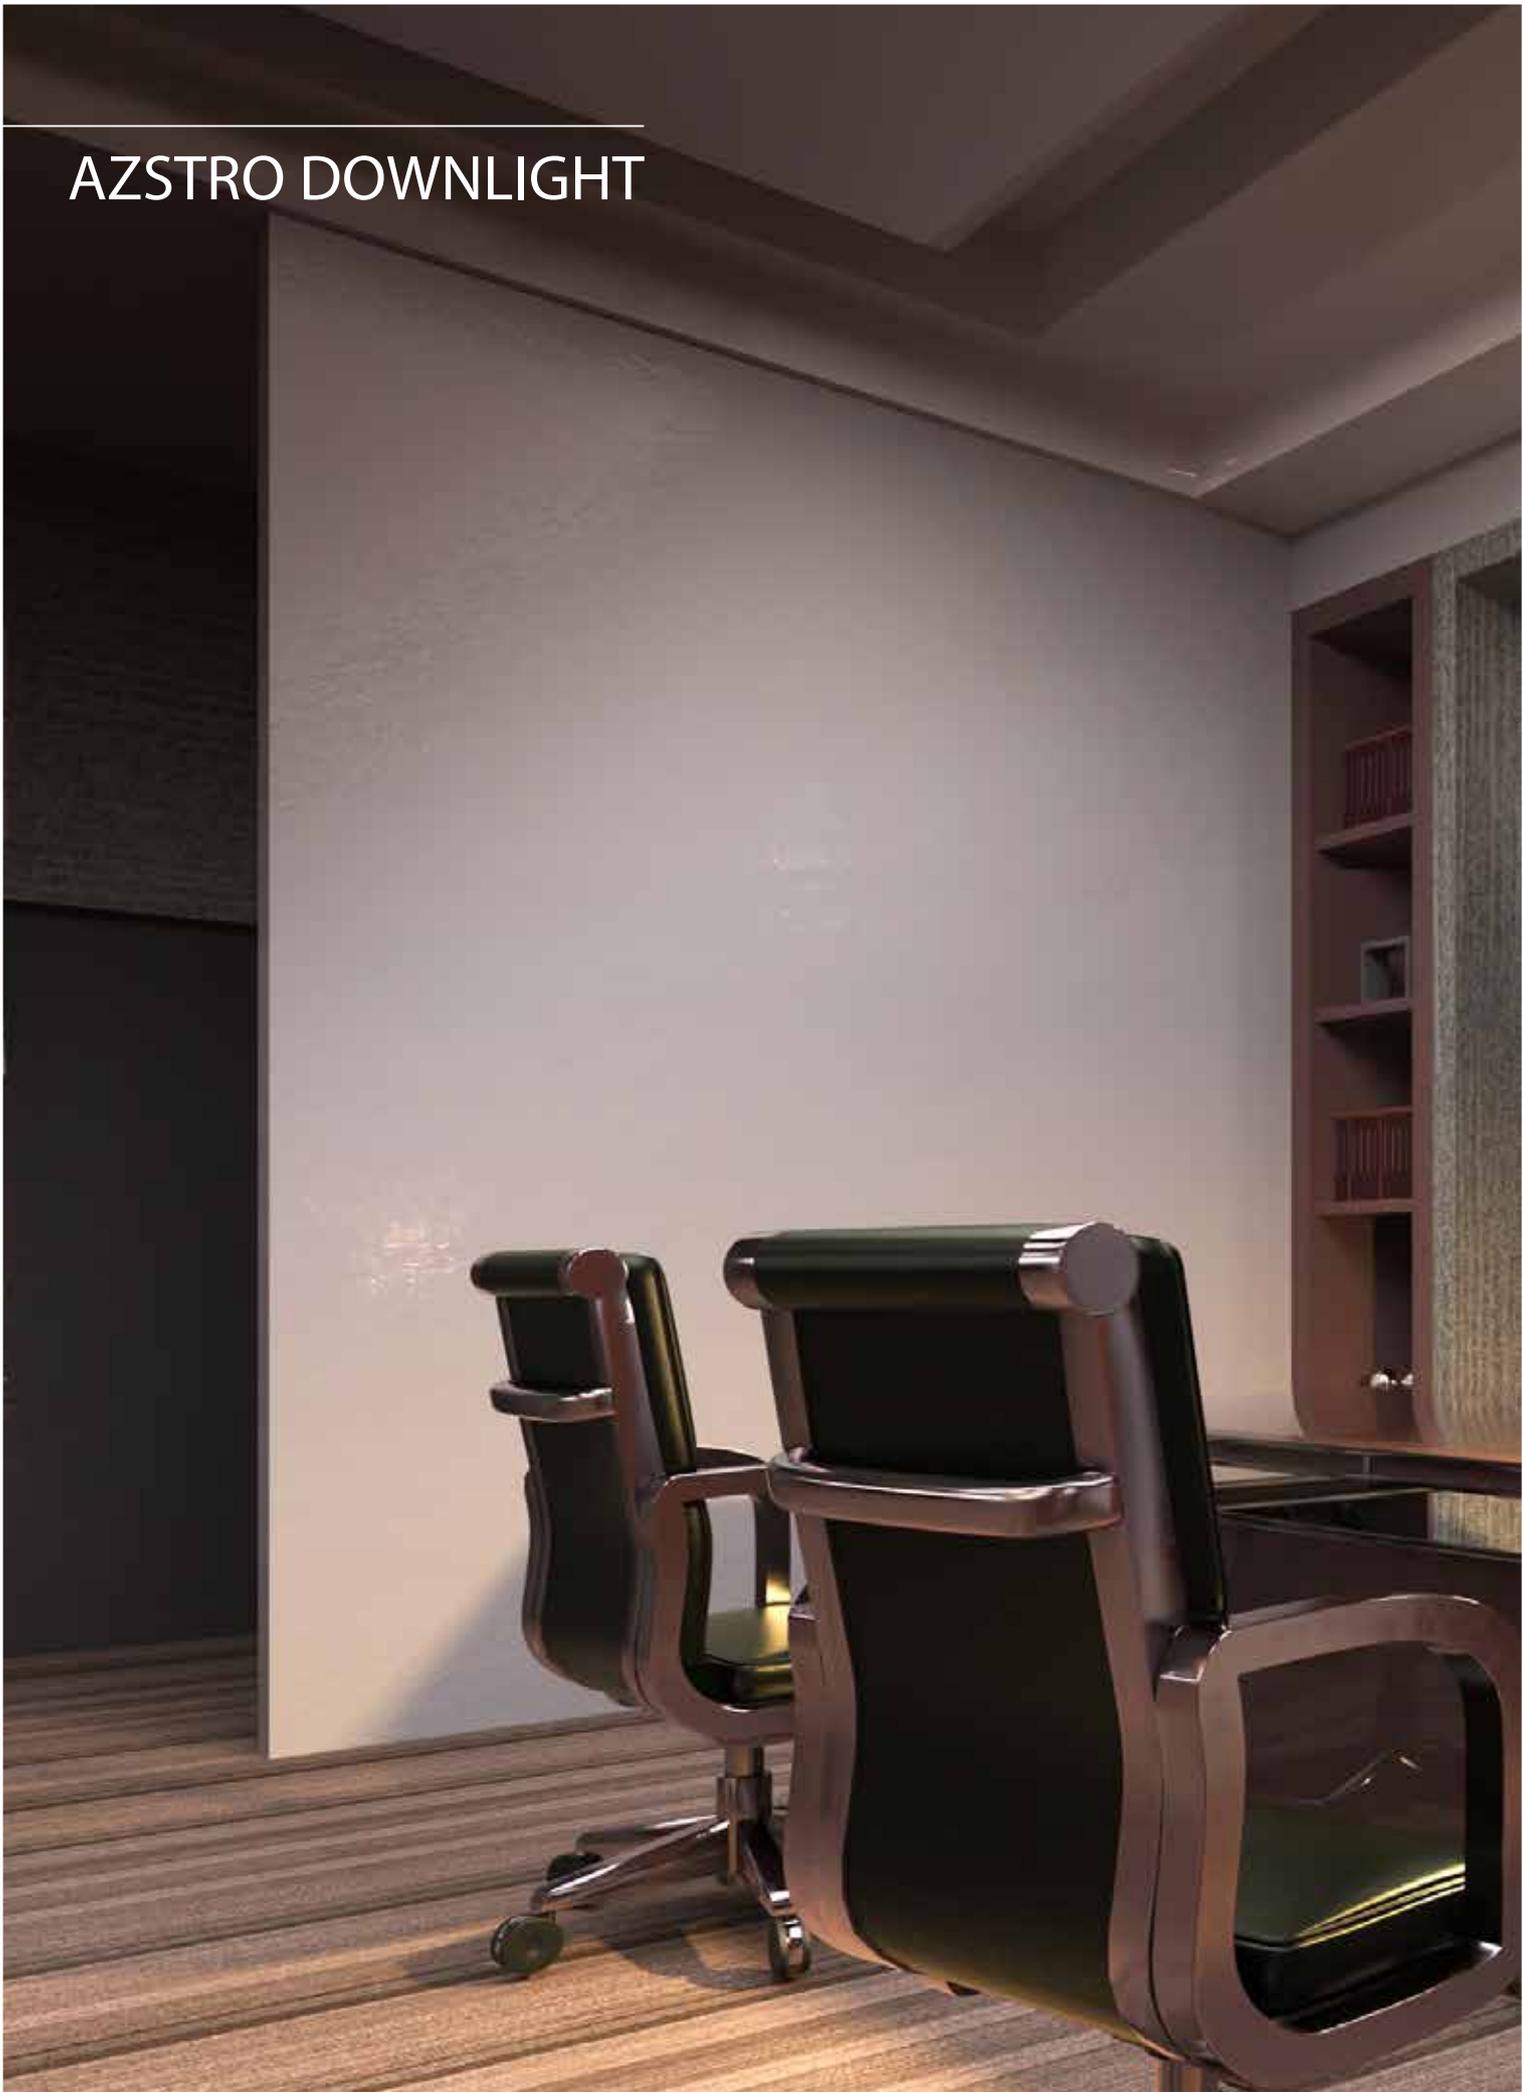

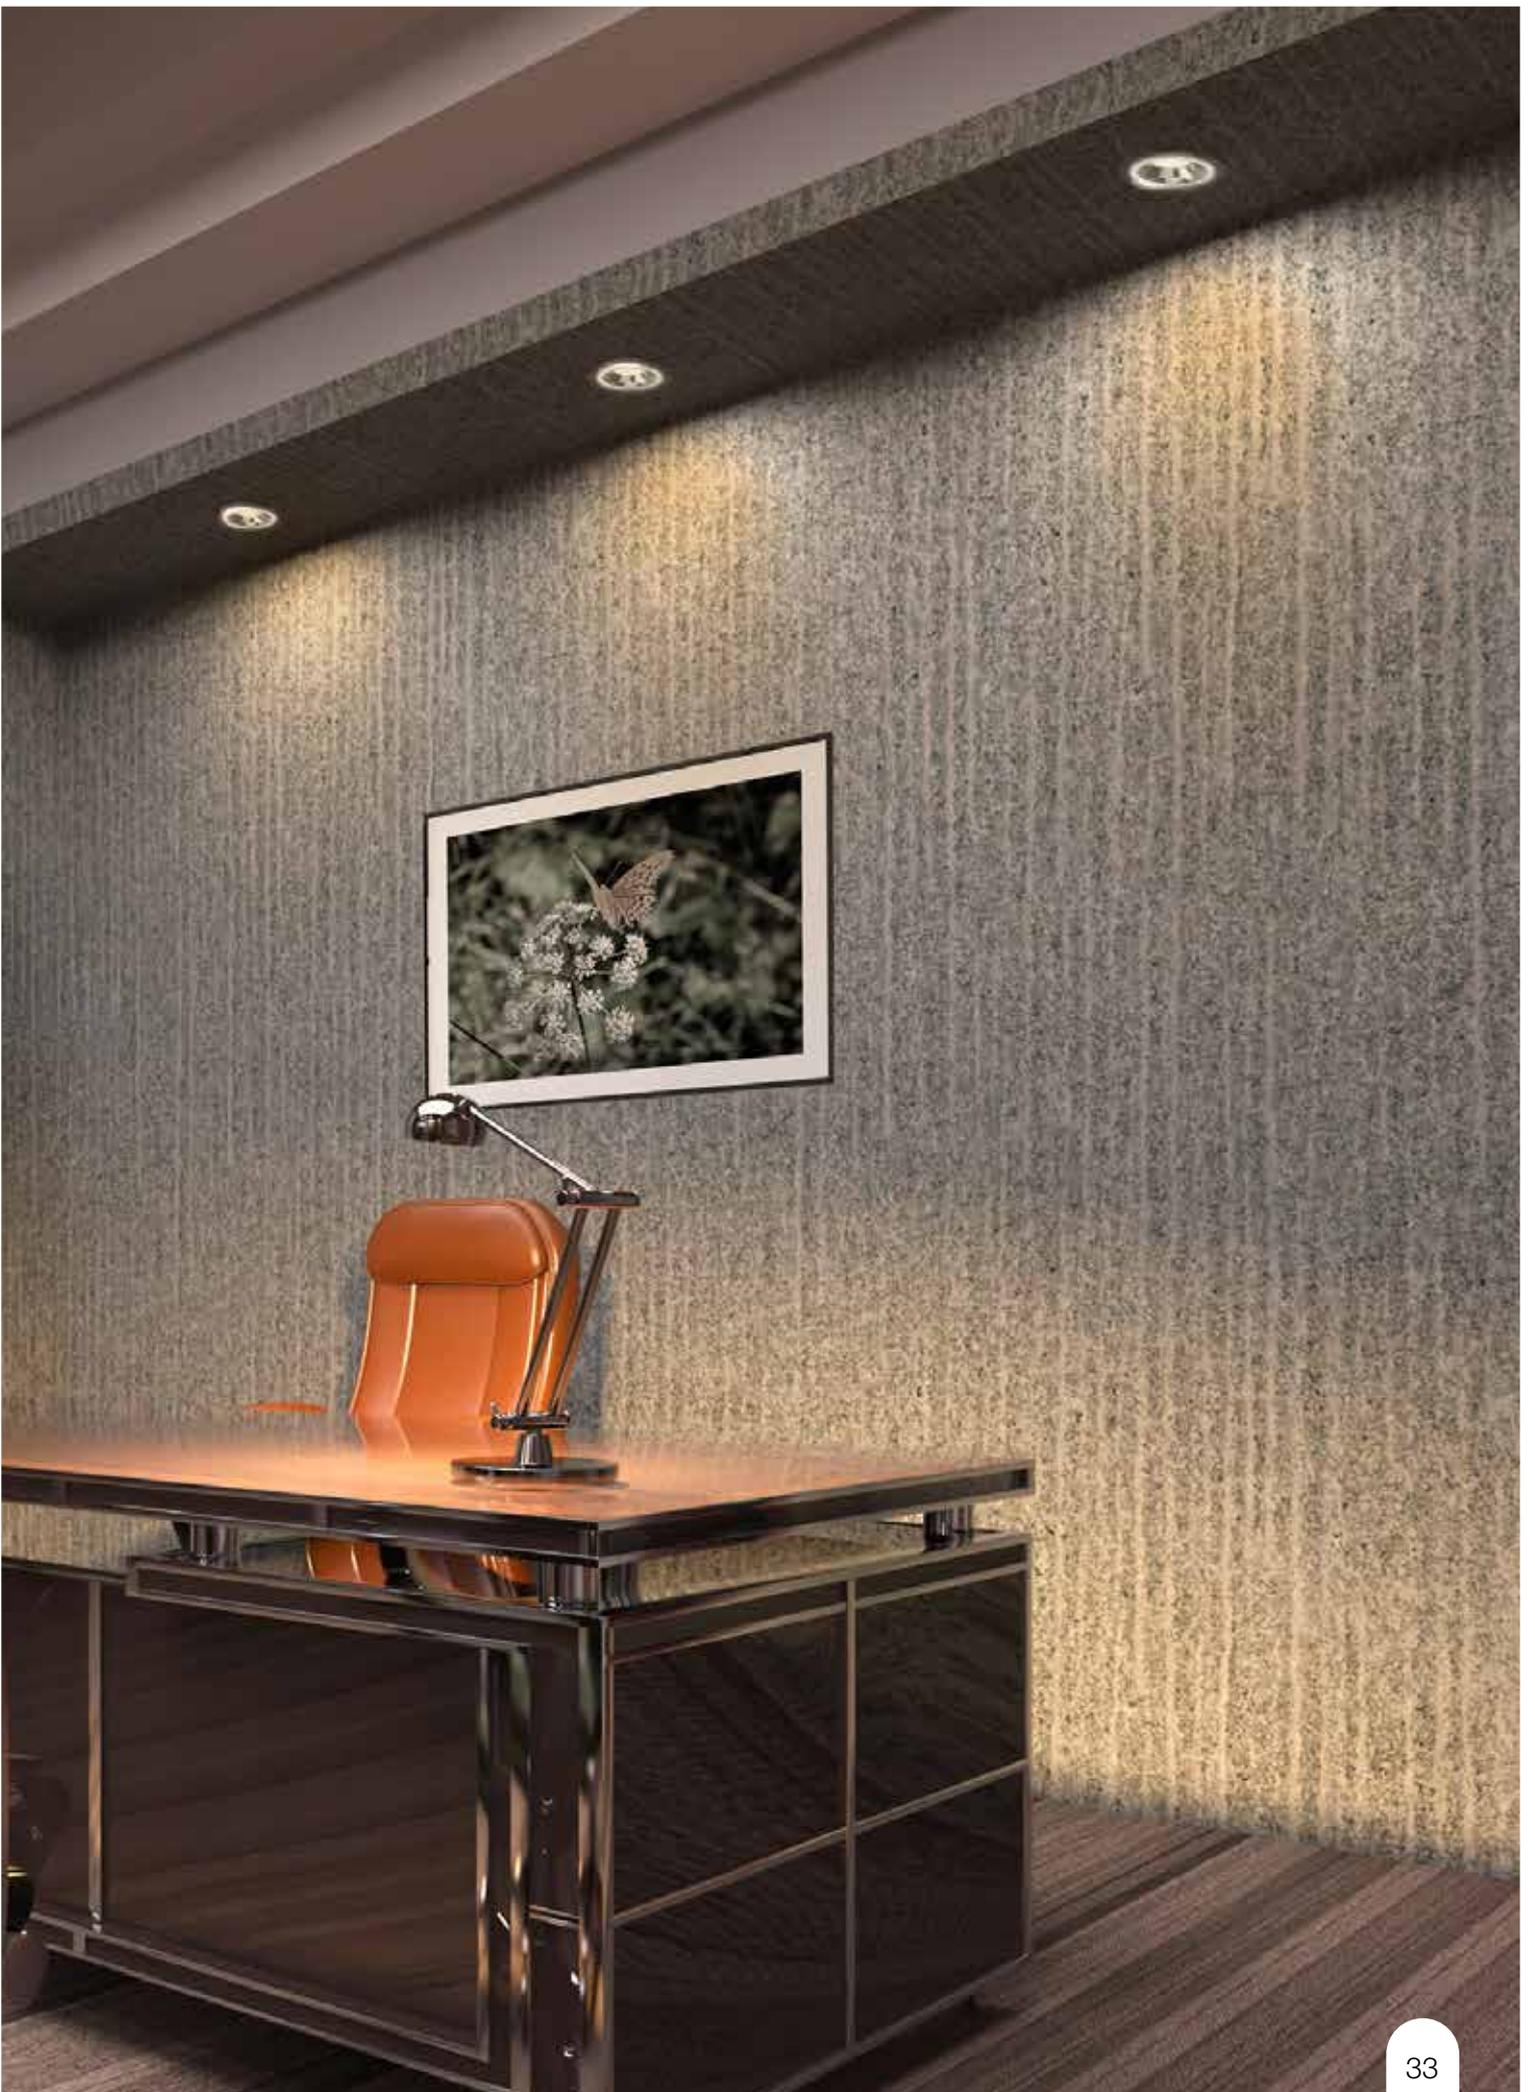

# AZSTRO DOWNLIGHT WHITE



White



Gold



Chrome




Premium category of COB downlight with compact design, premium housing that seamlessly merges with the ceiling. Its great colour and light quality adds value to your home décor

## TECHNICAL DATA

Ordering Code	System Power (W)	Power Factor	Colour Temp. (CCT)	CRI	System Lumens (lm)	Colour of Fixture	Beam Angle (°)	UGR	Whole Sale (No. of unit/s)	Master Packing (No. of unit/s)
LHEBAFPBPB1W005	5 W	≥0.90	3000 K	≥80	355 lm	White	24°	<11	8 N	24 N
LHEBAFPDPB1W005	5 W	≥0.90	4000 K	≥80	375 lm	White	24°	<11	8 N	24 N
LHEBAFPBPB1W010	10 W	≥0.90	3000 K	≥80	855 lm	White	36°	<16	6 N	24 N
LHEBAFPDPB1W010	10 W	≥0.90	4000 K	≥80	900 lm	White	36°	<16	6 N	24 N
LHEBAFPBPB1W015	15 W	≥0.90	3000 K	≥80	1280 lm	White	36°	<16	6 N	24 N
LHEBAFPDPB1W015	15 W	≥0.90	4000 K	≥80	1350 lm	White	36°	<16	6 N	24 N

All fixtures are suitable for 240 V

## TECHNICAL DRAWING

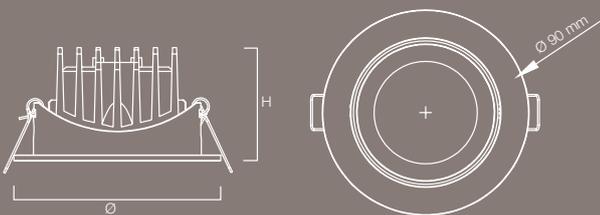

## DIMENSIONS


System Power	Ø	Height (h)	Cutout Size
5 W	65 mm	48 mm	55 mm
10 W	85 mm	54 mm	75 mm
15 W	105 mm	62 mm	95 mm

All dimensions are in mm | Tolerance: ± 2 mm

## RING ATTACHMENT

System Power	Product Description	Case lot No. of unit/s
LSSLNW0280	AZSTRO RING ATTACHMENT 5 W COB WHITE	60 N
LSSLNY0035	AZSTRO RING ATTACHMENT 5 W COB GOLD	60 N
LSSLNC0028	AZSTRO RING ATTACHMENT 5 W COB CHROME	60 N
LSSLNW0281	AZSTRO RING ATTACHMENT 10 W COB WHITE	60 N
LSSLNY0036	AZSTRO RING ATTACHMENT 10W COB GOLD	60 N
LSSLNC0029	AZSTRO RING ATTACHMENT 10 W COB CHROME	60 N
LSSLNW0282	AZSTRO NEW RING ATTACHMENT 15W COB WHITE	60 N
LSSLNY0037	AZSTRO NEW RING ATTACHMENT 15W GOLD	60 N
LSSLNC0030	AZSTRO NEW RING ATTACHMENT 15W COB CHROME	60 N

## AVAILABLE REFLECTOR DEG.



## PRODUCT SPECIFICATIONS

### FEATURES

- Premium design that merges with ceiling
- Effective heat sink design
- Reflector optics to create intense light beam
- Premium specular graphite reflector
- Other reflector colour options: White/Chrome /Gold

### APPLICATIONS

Modern Homes  
Shopping Malls  
Restaurants  
Hotel Lobbies  
Corporate Office

# AZSTRO DOWNLIGHT BLACK



White



Gold



Copper



Eye Soft  
Technology


Premium category of Downlighter with compact design. It's great colour options of reflector give a choice to the consumers to match fixture with ceiling color and adds value to your home décor.

## TECHNICAL DATA

Ordering Code	System Power (W)	Power Factor	THD %	Colour Temp. (CCT)	CRI	System Lumens (lm)	Colour of Fixture	Beam Angle (°)	UGR	Whole Sale (No.of unit/s)	Master Packing (No.of unit/s)
LHEBAFPAIE1K007	7.5 W	≥0.95	<10%	2700 K	>80	525 lm	BLACK	30°	<19	12 N	48 N
LHEBAFPDIE1K007	7.5 W	≥0.95	<10%	4000 K	>80	550 lm	BLACK	30°	<19	12 N	48 N
LHEBAFPAIE1K015	15 W	≥0.95	<10%	2700 K	>80	1100 lm	BLACK	30°	<19	8 N	24 N
LHEBAFPDIE1K015	15 W	≥0.95	<10%	4000 K	>80	1150 lm	BLACK	30°	<19	8 N	24 N
LHEBAFPAIE1K020	20 W	≥0.95	<10%	2700 K	>80	1700 lm	BLACK	30°	<19	8 N	24 N
LHEBAFPDIE1K020	20 W	≥0.95	<10%	4000 K	>80	1800 lm	BLACK	30°	<19	8 N	24 N

All fixtures are suitable for 240 V

## TECHNICAL DRAWING

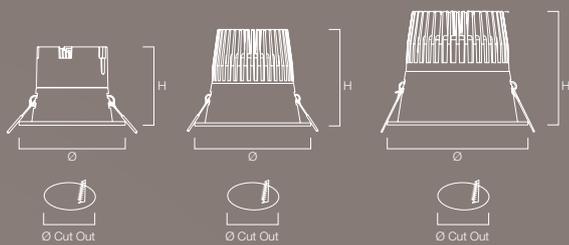

## DIMENSIONS


System Power	Spring to Spring ø	ø	Height (h)	Cutout Size
7.5 W	64 mm	75 mm	55 mm	65 mm
15 W	84 mm	95 mm	80 mm	85 mm
20 W	104 mm	115 mm	95 mm	105 mm

All dimensions are in mm | Tolerance: ± 2 mm

## AZSTRO RING

System Power	Product Description
LSSLNW0173	Azstro Ring attachment 7 W White
LSSLNA0017	Azstro Ring attachment 7 W Copper
LSSLNY0017	Azstro Ring attachment 7 W Gold
LSSLNW0174	Azstro Ring attachment 15 W White
LSSLNA0018	Azstro Ring attachment 15 W Copper
LSSLNY0018	Azstro Ring attachment 15 W Gold
LSSLNW0175	Azstro Ring attachment 20 W White
LSSLNA0019	Azstro Ring attachment 20 W Copper
LSSLNY0019	Azstro Ring attachment 20 W Gold

## AVAILABLE REFLECTOR DEG.



## PRODUCT SPECIFICATIONS

### FEATURES

- Black housing design with different reflector color options that merge with the ceiling
- Elegant aluminum heat sink design for effective heat dissipation
- Deep reflector with high grade lens for precise beam angle and glare-free light
- Focused beam angle to highlight object and artifacts

### APPLICATIONS

Modern Homes  
Restaurants  
Hotel Lobbies  
Retail Showrooms

# AZSTRO SPOT LIGHTS





# AZSTRO SPOT LIGHTS



7.5 W Fixed



7.5 W Swivel



13 W Fixed



13 W Swivel



Premium Category of Spot light with compact design. It's great colour options of reflector give a choice to the consumers to match fixture with ceiling color and adds value to your home décor.

## TECHNICAL DATA

Ordering Code	System Power (W)	Power Factor	THD %	Colour Temp. (CCT)	CRI	System Lumens (lm)	Colour of Fixture	Beam Angle (°)	UGR	Whole Sale (No.of unit/s)	Master Packing (No.of unit/s)
LHEBAFPBPB1J7X5	7.5 W	≥0.90	<10%	3000 K	≥80	525 lm	Grey	24°	<19	12 N	24 N
LHEBAFPDPB1J7X5	7.5 W	≥0.90	<10%	4000 K	≥80	550 lm	Grey	24°	<19	12 N	24 N
LHEBAFPBPZ1J013	13 W	≥0.90	<10%	3000 K	≥80	930 lm	Grey	30°	<19	8 N	24 N
LHEBAFPDPZ1J013	13 W	≥0.90	<10%	4000 K	≥80	975 lm	Grey	30°	<19	8 N	24 N

## DIMMABLE DRIVER


LSSLNW0218	7.5 W	≥0.95	<33%	-	-	-	-	-	-	-
LSSLNW0219	13 W	≥0.95	<33%	-	-	-	-	-	-	-

## NON DIMMABLE DRIVER

LSSLNW0220	7.5 W	≥0.95	<10%	-	-	-	-	-	-	-
LSSLNW0221	13 W	≥0.95	<10%	-	-	-	-	-	-	-

All fixtures are suitable for 240 V

## TECHNICAL DRAWING




## DIMENSIONS

System Power	ø	Height (h)	Cutout Size
7.5 W	60 mm	82 mm	55 mm
13 W	82 mm	100 mm	75 mm

All dimensions are in mm | Tolerance: ± 2 mm

## AVAILABLE REFLECTOR DEG.



## AZSTRO RING

System Power	Product Description	System lumens	Case lot No. of unit/s
LSSLNB0036	Azstro Module Ring 7.5 W Fixed BLK	Fixed	24 N
LSSLNW0214	Azstro Module Ring 7.5 W Fixed WHT	Fixed	24 N
LSSLNW0215	Azstro Module Ring 7.5 W Swivel BLK	Swivel	24 N
LSSLNB0037	Azstro Module Ring 7.5 W Swivel WHT	Swivel	24 N
LSSLNB0038	Azstro Module Ring 13 W Fixed BLK	Fixed	24 N
LSSLNW0216	Azstro Module Ring 13 W Fixed WHT	Fixed	24 N
LSSLNB0039	Azstro Module Ring 13 W Swivel BLK	Swivel	24 N
LSSLNW0217	Azstro Module Ring 13 W Swivel WHT	Swivel	24 N

## PRODUCT SPECIFICATIONS

### FEATURES

- Premium design that merges with ceiling
- Effective heat sink design
- Narrow beam angle
- UGR<16
- Collar available in both Fixed and Swivel
- Collar available in both White and Black Color

### APPLICATIONS

Modern Homes  
Restaurants  
Hotel Lobbies  
Retail Showrooms

# AZSTRO IP 65 DOWNLIGHT





# AZSTRO IP 65 SWIVEL DOWNLIGHT




Premium category of COB downlight with compact design, trimless housing thaamlessly merges with the ceiling. It is weather proof with IP65 protection. Its great colour and light quality adds value to your home décor

## TECHNICAL DATA

Ordering Code	System Power (W)	Power Factor	THD %	Colour Temp. (CCT)	CRI	System Lumens (lm)	Colour of Fixture	Beam Angle (°)	UGR	Whole Sale (No.of unit/s)	Master Packing (No.of unit/s)
LHEECDPBPG6W010	10 W	≥0.90	<10%	3000 K	≥80	850 lm	Matt White	36°	<19	6 N	24 N
LHEECDPDPG6W010	10 W	≥0.90	<10%	4000 K	≥80	900 lm	Matt White	36°	<19	6 N	24 N

All fixtures are suitable for 240 V

## TECHNICAL DRAWING

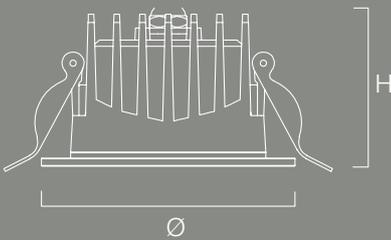


## DIMENSIONS

System Power	Ø	Height (h)	Cutout Size
10 W	90 mm	50 mm	88 mm

All dimensions are in mm | Tolerance: ± 2 mm

## AVAILABLE REFLECTOR DEG.



## PRODUCT SPECIFICATIONS

### FEATURES

- Premium design that merges with ceiling
- Effective heat sink design
- Swivel Head
- Reflector optics to create intense light beam
- Weather proof with IP65 protectio

### APPLICATIONS

Shower zone  
Bathroom Space

# AZSTRO IP 65 FIXED DOWNLIGHT




Premium category of COB downlight with compact design, trimless housing that seamlessly merges with the ceiling. It is weather proof with IP65 protection. Its great colour and light quality adds value to your home décor.

## TECHNICAL DATA

Ordering Code	System Power (W)	Power Factor	THD %	Colour Temp. (CCT)	CRI	System Lumens (lm)	Colour of Fixture	Beam Angle (°)	UGR	Whole Sale (No.of unit/s)	Master Packing (No.of unit/s)
LHEECDPBPG6W010	10 W	≥0.90	<10%	3000 K	≥80	850 lm	Matt White	36°	<19	6 N	24 N
LHEECCDPG6W010	10 W	≥0.90	<10%	4000 K	≥80	900 lm	Matt White	36°	<19	6 N	24 N

All fixtures are suitable for 240 V

## TECHNICAL DRAWING

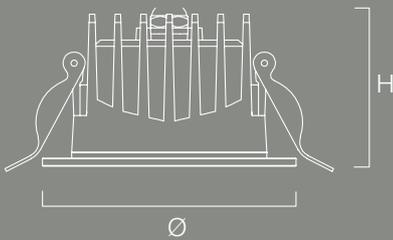


## DIMENSIONS

System Power	Ø	Height (h)	Cutout Size
10 W	82 mm	50 mm	80 mm

All dimensions are in mm | Tolerance: ± 2 mm

## AVAILABLE REFLECTOR DEG.



## PRODUCT SPECIFICATIONS

### FEATURES

- Premium design that merges with ceiling
- Effective heat sink design
- Fixed Head
- Reflector optics to create intense light beam
- Weather proof with IP65 protection

### APPLICATIONS

Shower zone  
Bathroom Space

---

# ARICA SPOTLIGHT





# ARICA SPOTLIGHT




Premium category of spotlight with compact design, trimless housing that seamlessly merges with the ceiling. Its great colour and light quality adds value to your home décor.

## TECHNICAL DATA

Ordering Code	System Power (W)	Power Factor	THD %	Colour Temp. (CCT)	CRI	System Lumens (lm)	Colour of Fixture	Beam Angle (°)	UGR	Whole Sale (No. of unit/s)	Master Packing (No. of unit/s)
LHEEAHPAPG1K007	7.5 W	≥0.95	<10%	2700 K	≥80	525 lm	Black	24°	<13	12 N	24 N
LHEEAHPDPG1K007	7.5 W	≥0.95	<10%	4000 K	≥80	550 lm	Black	24°	<13	12 N	24 N
LHEEAHPBPG1W007	7.5 W	≥0.95	<10%	2700 K	≥80	525 lm	White	24°	<13	12 N	24 N
LHEEAHPDPG1W007	7.5 W	≥0.95	<10%	4000 K	≥80	550 lm	White	24°	<13	12 N	24 N
LHEEAHPAPG1K012	13 W	≥0.95	<10%	2700 K	≥80	900 lm	Black	30°	<13	12 N	24 N
LHEEAHPDPG1K012	13 W	≥0.95	<10%	4000 K	≥80	950 lm	Black	30°	<13	12 N	24 N
LHEEAHPBPG1W012	13 W	≥0.95	<10%	2700 K	≥80	900 lm	White	30°	<13	12 N	24 N
LHEEAHPDPG1W012	13 W	≥0.95	<10%	4000 K	≥80	950 lm	White	30°	<13	12 N	24 N

All fixtures are suitable for 240 V

## TECHNICAL DRAWING

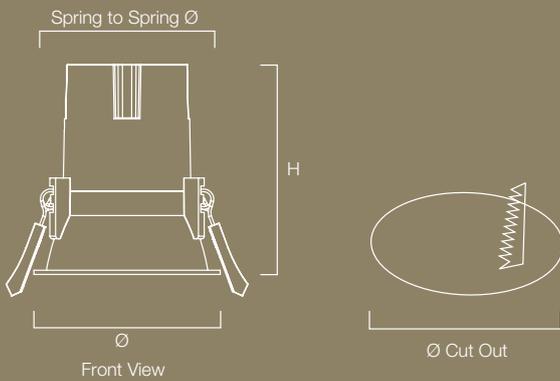


## DIMENSIONS

System Power	Spring to Spring Ø	Ø	Height (h)	Cutout Size
7.5 W	64 mm	70 mm	80 mm	65 mm
13 W	84 mm	93 mm	100 mm	85 mm

All dimensions are in mm | Tolerance: ± 2 mm

## AVAILABLE REFLECTOR DEG.



## PRODUCT SPECIFICATIONS

### FEATURES

- Ultra compact design with different reflector color options that merge with the ceiling
- Elegant aluminum heat sink design for effective heat dissipation
- Deep reflector with high grade lens for precise beam angle and glare-free light
- Focused beam angle to highlight object and artifacts

### APPLICATIONS

Modern Homes  
Restaurants  
Hotel Lobbies  
Retail Showrooms

# AZAR SPOTLIGHT





# AZAR SPOTLIGHT



Azar Spotlight Black




Premium category of spotlight with compact design, trimless housing that seamlessly merges with the ceiling. Its great colour and light quality adds value to your home décor.

## TECHNICAL DATA

Ordering Code	System Power (W)	Power Factor	THD %	Colour Temp. (CCT)	CRI	System Lumens (lm)	Colour of Fixture	Beam Angle (°)	UGR	Whole Sale (No.of unit/s)	Master Packing (No.of unit/s)
LHEEAIPBPG1K007	7.5 W	≥0.95	<10%	2700 K	>80	525 lm	Black	36°	<13	12 N	24 N
LHEEAIPDPG1K007	7.5 W	≥0.95	<10%	4000 K	>80	550 lm	Black	36°	<13	12 N	24 N
LHEEAIPBPG1W007	7.5 W	≥0.95	<10%	2700 K	>80	525 lm	White	36°	<13	12 N	24 N
LHEEAIPDPG1W007	7.5 W	≥0.95	<10%	4000 K	>80	550 lm	White	36°	<13	12 N	24 N

All fixtures are suitable for 240 V

## TECHNICAL DRAWING

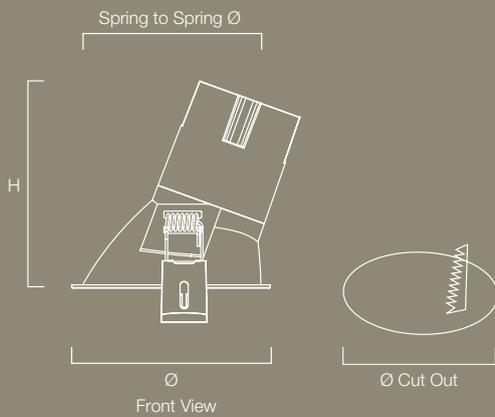

## DIMENSIONS

System Power	Spring to Spring Ø	Ø	Height (h)	Cutout Size
7.5 W	75 mm	84 mm	86 mm	76 mm

All dimensions are in mm | Tolerance: ± 2 mm

## AVAILABLE REFLECTOR DEG.



## PRODUCT SPECIFICATIONS

### FEATURES


- Ultra compact design with different reflector color options that merge with the ceiling
- Elegant aluminum heat sink design for effective heat dissipation
- Deep reflector with high grade lens for precise beam angle and glare-free light
- Focused beam angle to highlight object and artifacts

### APPLICATIONS

Modern Homes  
Restaurants  
Hotel Lobbies  
Retail Showrooms

---

# EMPIRIA SPOTLIGHT

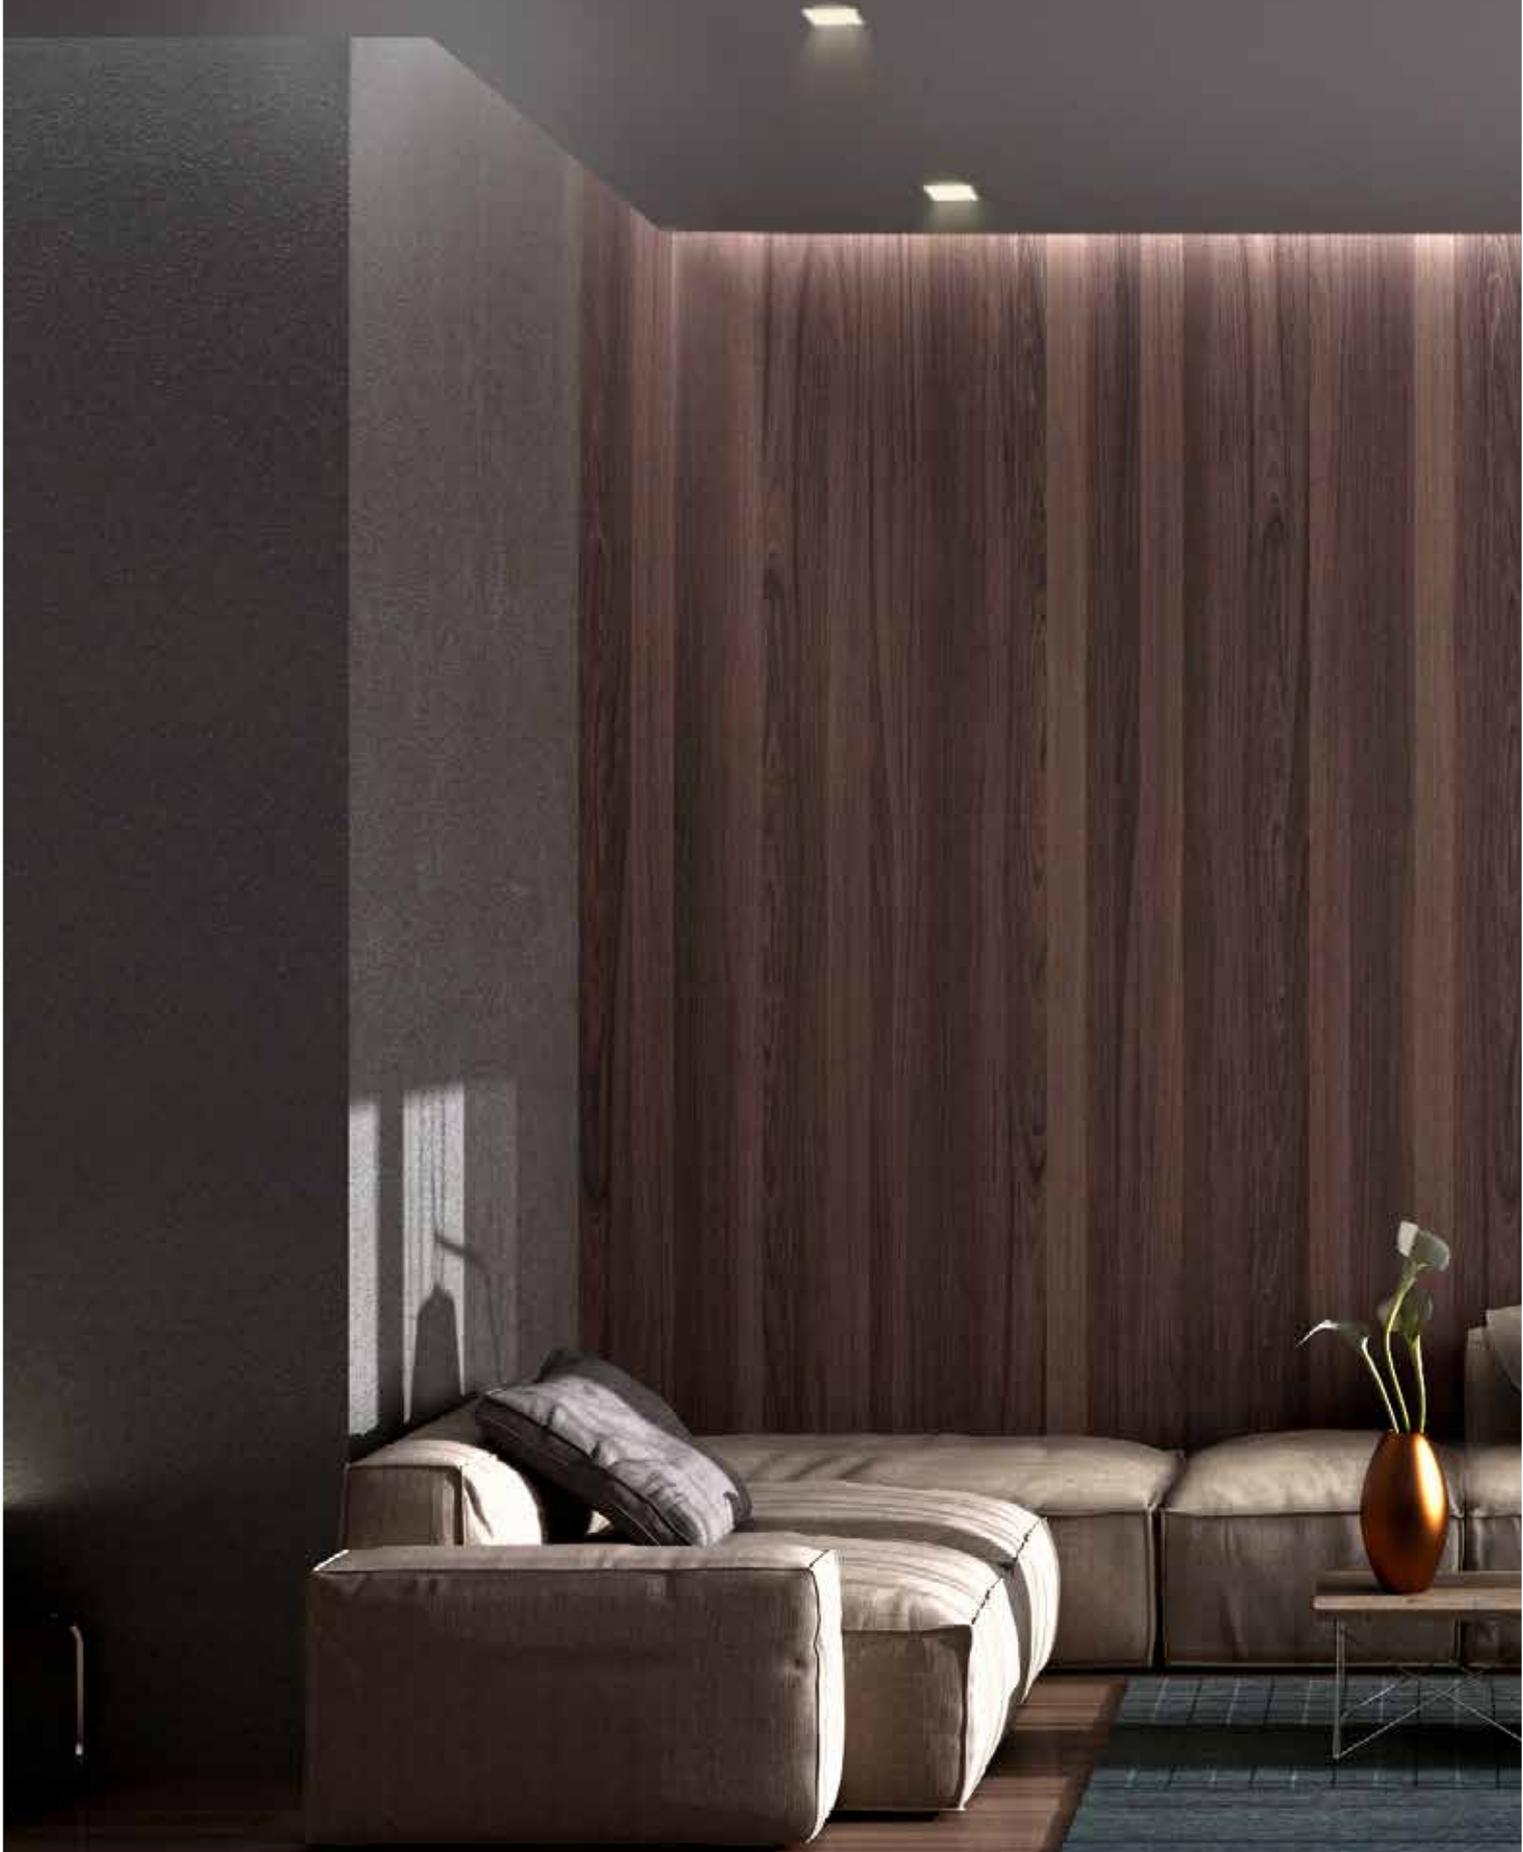



# EMPIRIA SPOTLIGHT



Empiria Spotlight Black




Premium category of spotlight with compact design, trimless housing that seamlessly merges with the ceiling. Its great colour and light quality adds value to your home décor. Ideally suited for low ceiling areas for glare-free light.

## TECHNICAL DATA

Ordering Code	System Power (W)	Power Factor	THD %	Colour Temp. (CCT)	CRI	System Lumens (lm)	Colour of Fixture	Beam Angle (°)	UGR	Whole Sale (No.of unit/s)	Master Packing (No.of unit/s)
LHEEAJPBPG1K012	13 W	≥0.95	<10%	2700 K	>80	900 lm	Black	30°	<13	12 N	24 N
LHEEAJPDPG1K012	13 W	≥0.95	<10%	4000 K	>80	950 lm	Black	30°	<13	12 N	24 N
LHEEAJPBPG1W012	13 W	≥0.95	<10%	2700 K	>80	900 lm	White	30°	<13	12 N	24 N
LHEEAJPDPG1W012	13 W	≥0.95	<10%	4000 K	>80	950 lm	White	30°	<13	12 N	24 N

All fixtures are suitable for 240 V

## TECHNICAL DRAWING

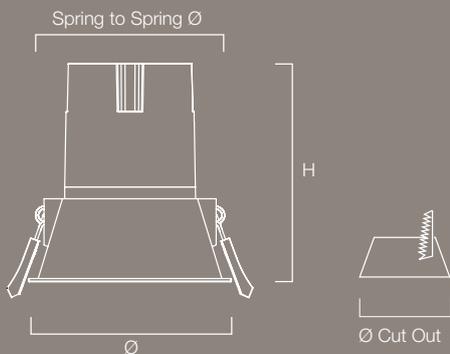


## DIMENSIONS

System Power	Spring to Spring ø	Length (l)	Width (w)	Height (h)	Cutout Size
13 W	84 mm	93 mm	93 mm	94.5 mm	85 mm x 85 mm

All dimensions are in mm | Tolerance: ± 2 mm

## AVAILABLE REFLECTOR DEG.



## PRODUCT SPECIFICATIONS

### FEATURES

- Ultra compact design with different reflector color options that merge with the ceiling
- Elegant aluminum heat sink design for effective heat dissipation
- Deep reflector with high grade lens for precise beam angle and glare-free light
- Focused beam angle to highlight object and artifacts

### APPLICATIONS

Modern Homes  
Restaurants  
Hotel Lobbies  
Retail Showrooms

# FLOURES SURFACE SPOTLIGHT





# FLOURES SURFACE SPOTLIGHT



White



Black



Antique Bronze



Antique Brass



Decorative surface mounted fixture with compact design available in different finish and colors to match with ceiling requirements.


## TECHNICAL DATA

Ordering Code	System Power (W)	Power Factor	THD %	Colour Temp. (CCT)	CRI	System Lumens (lm)	Colour of Fixture	Beam Angle (°)	UGR	Whole Sale (No.of unit/s)	Master Packing (No.of unit/s)
LHEEAKPBIE1K007	7 W	≥0.95	<10%	3000 K	>75	525 lm	Black	36°	<19	12 N	24 N
LHEEAKPBIE1W007	7 W	≥0.95	<10%	3000 K	>75	525 lm	White	36°	<19	12 N	24 N
LHEEAKPBIE1H007	7 W	≥0.95	<10%	3000 K	>75	525 lm	Antique Bronze	36°	<19	12 N	24 N
LHEEAKPBIE1T007	7 W	≥0.95	<10%	3000 K	>75	525 lm	Antique Brass	36°	<19	12 N	24 N
LHEEAKPBIE1K012	12 W	≥0.95	<10%	3000 K	>80	960 lm	Black	36°	-	12 N	24 N
LHEEAKPBIE1W012	12 W	≥0.95	<10%	3000 K	>80	960 lm	white	36°	-	12 N	24 N
LHEEAKPBIE1K018	18 W	≥0.95	<10%	3000 K	>80	1530 lm	Black	36°	-	8 N	16 N
LHEEAKPBIE1W018	18 W	≥0.95	<10%	3000 K	>80	1530 lm	white	36°	-	8 N	16 N

LHEEAKPDIE1W007	7 W	≥0.95	<10%	4000 K	>75	525 lm	Black	36°	<19	12 N	24 N
LHEEAKPDIE1K007	7 W	≥0.95	<10%	4000 K	>75	525 lm	White	36°	<19	12 N	24 N
LHEEAKPDIE1H007	7 W	≥0.95	<10%	4000 K	>75	525 lm	Antique Bronze	36°	<19	12 N	24 N
LHEEAKPDIE1T007	7 W	≥0.95	<10%	4000 K	>75	525 lm	Antique Brass	36°	<19	12 N	24 N
LHEEAKPDIE1K012	12 W	≥0.95	<10%	4000 K	>80	960 lm	Black	36°	-	12 N	24 N
LHEEAKPDIE1W012	12 W	≥0.95	<10%	4000 K	>80	960 lm	white	36°	-	12 N	24 N
LHEEAKPDIE1K018	18 W	≥0.95	<10%	4000 K	>80	1530 lm	Black	36°	-	8 N	16 N
LHEEAKPDIE1W018	18 W	≥0.95	<10%	4000 K	>80	1530 lm	white	36°	-	8 N	16 N

All fixtures are suitable for 240 V

## TECHNICAL DRAWING

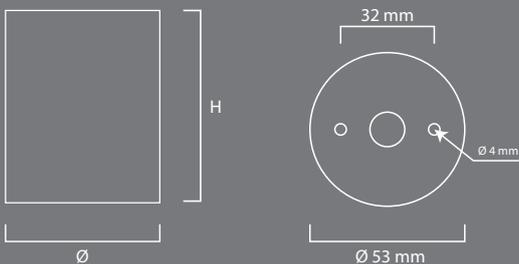

## DIMENSIONS

System Power	Ø	Height (h)
7 W	56 mm	66 mm
12 W	76 mm	110 mm
18 W	96 mm	120 mm

All dimensions are in mm | Tolerance: ± 2 mm

## PRODUCT SPECIFICATIONS


### FEATURES

- Surface mounted fixture with compact and decorative design
- Available with different finish and color options that merge with ceiling
- Aluminum heat sink for better heat dissipation

## APPLICATIONS

Modern Homes  
Restaurants  
Hotel Lobbies  
Retail Showrooms

## AVAILABLE REFLECTOR DEG.



# UNISPOT / DUOSPOT SURFACE SPOTLIGHT





# UNISPOT / DUOSPOT SURFACE SPOTLIGHT



Unispot black



Unispot white



Duospot black



Duospot white



Surface Spotlight with aluminum structure, available with adjustable light engine to achieve the desired illumination angle.


## TECHNICAL DATA

Ordering Code	System Power (W)	Power Factor	THD %	Colour Temp. (CCT)	CRI	System Lumens (lm)	Colour of Fixture	Beam Angle (°)	UGR	Whole Sale (No. of unit/s)	Master Packing (No. of unit/s)
LHEEAFBIG1W005	5 W	≥0.95	<10%	3000 K	>75	225 lm	Sand Black	24°	-	8 N	24 N
LHEEAFBIG1K005	5 W	≥0.95	<10%	3000 K	>75	225 lm	Sand White	24°	-	8 N	24 N
LHEEAFBIG1W010	10 W	≥0.95	<10%	3000 K	>75	500 lm	Sand Black	24°	-	8 N	24 N
LHEEAFBIG1K010	10 W	≥0.95	<10%	3000 K	>75	500 lm	Sand White	24°	-	8 N	24 N

LHEEAFPDIG1K005	5 W	≥0.95	<10%	4000 K	>75	225 lm	Sand Black	24°	-	8 N	24 N
LHEEAFPLIG1K010	5 W	≥0.95	<10%	4000 K	>75	225 lm	Sand White	24°	-	8 N	24 N
LHEEAFPDIG1W005	10 W	≥0.95	<10%	4000 K	>75	500 lm	Sand Black	24°	-	8 N	24 N
LHEEAFPLIG1W010	10 W	≥0.95	<10%	4000 K	>75	500 lm	Sand White	24°	-	8 N	24 N

All fixtures are suitable for 240 V

## TECHNICAL DRAWING

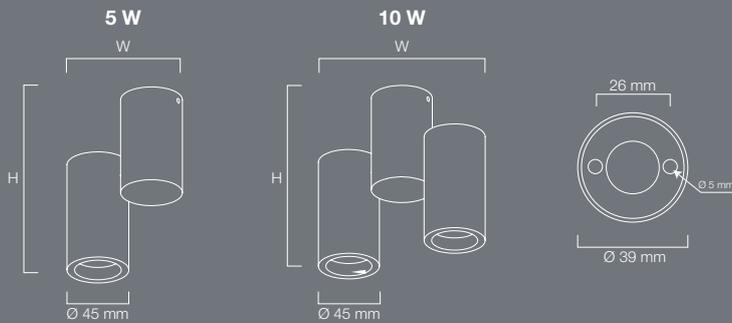


## DIMENSIONS

System Power	∅	Height (h)
5 W	93 mm	140 mm
10 W	140 mm	140 mm

All dimensions are in mm | Tolerance: ± 2 mm

## AVAILABLE REFLECTOR DEG.



## PRODUCT SPECIFICATIONS

### FEATURES

- Available with the option to mount on ceiling or on wall
- Option of single head and double head that rotates 360°
- Focused beam angle to highlight object and artifacts
- Available in black and white colour

### APPLICATIONS

Modern Homes  
Restaurants  
Hotel Lobbies  
Retail Showrooms

# LUMINATO PANEL





# LUMINATO PANEL



Premium category of LED Panel with anti glare acrylic diffuser which emits light from rim enhancing ceiling aesthetics. Its great colour and light quality adds value to your home décor.


## TECHNICAL DATA

Ordering Code	System Power (W)	Power Factor	THD (%)	Colour Temp. (CCT)	CRI	System Lumen (lm)	Colour of Fixture	Shape	Beam Angle (°)	UGR	Whole Sale (No. of unit/s)	Master Packing (No. of unit/s)
LHEBAOP5PZ1W008	8 W	> 0.90	<10%	3000 K	>80	495 lm	White	Round	115°	-	12 N	24 N
LHEAOP6PZ1W008	8 W	> 0.90	<10%	4000 K	>80	525 lm	White	Round	115°	-	12 N	24 N
LHEAOP7PZ1W008	8 W	> 0.90	<10%	5700 K	>80	560 lm	White	Round	115°	-	12 N	24 N
LHEBAOP5PZ1W015	15 W	> 0.90	<10%	3000 K	>80	1090 lm	White	Round	115°	-	8 N	24 N
LHEAOP6PZ1W015	15 W	> 0.90	<10%	4000 K	>80	1140 lm	White	Round	115°	-	8 N	24 N
LHEAOP7PZ1W015	15 W	> 0.90	<10%	5700 K	>80	1200 lm	White	Round	115°	-	8 N	24 N
LHEBAOP5PZ1W022	22 W	> 0.90	<10%	3000 K	>80	1590 lm	White	Round	115°	-	6 N	12 N
LHEAOP6PZ1W022	22 W	> 0.90	<10%	4000 K	>80	1675 lm	White	Round	115°	-	6 N	12 N
LHEAOP7PZ1W022	22 W	> 0.90	<10%	5700 K	>80	1760 lm	White	Round	115°	-	6 N	12 N

LHEBAPP5PZ1W008	8 W	> 0.90	<10%	3000 K	>80	495 lm	White	Square	115°	-	12 N	24 N
LHEAPP6PZ1W008	8 W	> 0.90	<10%	4000 K	>80	525 lm	White	Square	115°	-	12 N	24 N
LHEAPP7PZ1W008	8 W	> 0.90	<10%	5700 K	>80	560 lm	White	Square	115°	-	12 N	24 N
LHEBAPP5PZ1W015	15 W	> 0.90	<10%	3000 K	>80	1090 lm	White	Square	115°	-	8 N	24 N
LHEAPP6PZ1W015	15 W	> 0.90	<10%	4000 K	>80	1140 lm	White	Square	115°	-	8 N	24 N
LHEAPP7PZ1W015	15 W	> 0.90	<10%	5700 K	>80	1200 lm	White	Square	115°	-	8 N	24 N
LHEBAPP5PZ1W022	22 W	> 0.90	<10%	3000 K	>80	1590 lm	White	Square	115°	-	6 N	12 N
LHEAPP6PZ1W022	22 W	> 0.90	<10%	4000 K	>80	1675 lm	White	Square	115°	-	6 N	12 N
LHEAPP7PZ1W022	22 W	> 0.90	<10%	5700 K	>80	1760 lm	White	Square	115°	-	6 N	12 N

All fixtures are suitable for 240 V

## TECHNICAL DRAWING

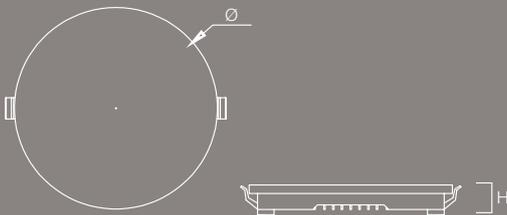


## DIMENSIONS

System Power	∅	Height (h)	Cutout Size
8 W	96 mm	22 mm	88 mm
15 W	153 mm	22 mm	145 mm
22 W	185 mm	22 mm	178 mm

All dimensions are in mm | Tolerance: ± 2 mm

## AVAILABLE REFLECTOR DEG.



## PRODUCT SPECIFICATIONS

### FEATURES

- Light emitted through rim enhancing the aesthetics of ceiling
- Anti-glare translucent acrylic diuser
- Premium die-cast aluminium housing

### APPLICATIONS

Modern Homes  
Restaurants  
Hotel Lobbies  
Retail Showrooms

---

# LUMINATO DEEP RECESS DOWNLIGHTER





# LUMINATO DEEP RECESS DOWNLIGHTER




Recess mounted pressure die-cast aluminium luminaire in powder coated white finish in round profile with optimized heat sink for efficient heat dissipation and independent electronic LED driver.

## TECHNICAL DATA

SAP Code	System Power (W)	Power Factor	THD (%)	Colour Temp. (CCT)	CRI	System Lumen (lm)	Colour of Fixture	Shape	UGR	Whole Sale (No.of unit/s)	Master Packing (No.of unit/s)
LHEHBRP5IL1W010	10 W	> 0.90	<10%	3000 K	>80	900 lm	White	Round	-	-	12 N
LHEHBRP6IL1W010	10 W	> 0.90	<10%	4000 K	>80	950 lm	White	Round	-	-	12 N
LHEHBRP7IL1W010	10 W	> 0.90	<10%	5700 K	>80	1000 lm	White	Round	-	-	12 N
LHEHBRP5IL1W015	15 W	> 0.90	<10%	3000 K	>80	1350 lm	White	Round	-	-	12 N
LHEHBRP6IL1W015	15 W	> 0.90	<10%	4000 K	>80	1425 lm	White	Round	-	-	12 N
LHEHBRP7IL1W015	15 W	> 0.90	<10%	5700 K	>80	1500 lm	White	Round	-	-	12 N
LHEHBRP5IL1W020	20 W	> 0.90	<10%	3000 K	>80	1800 lm	White	Round	-	-	12 N
LHEHBRP6IL1W020	20 W	> 0.90	<10%	4000 K	>80	1900 lm	White	Round	-	-	12 N
LHEHBRP7IL1W020	20 W	> 0.90	<10%	5700 K	>80	2000 lm	White	Round	-	-	12 N

All fixtures are suitable for 240 V

## TECHNICAL DRAWING

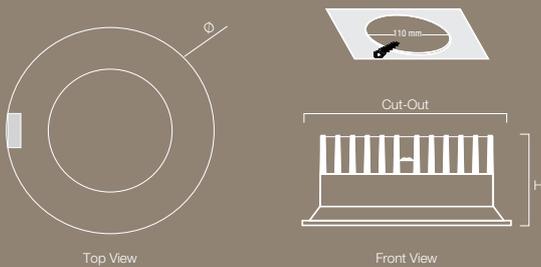


## DIMENSIONS

System Power	ø	Height (h)	Cutout Size
10 W	120 mm	50 mm	110 mm
15 W	120 mm	50 mm	110 mm
20 W	155 mm	55 mm	145 mm

All dimensions are in mm | Tolerance: ± 2 mm

## AVAILABLE REFLECTOR DEG.



## PRODUCT SPECIFICATIONS

### FEATURES

- Powder-coated die-cast aluminium housing
- Deep recessed diffuser for low-UGR Rating
- Available shapes: Round
- Efficacy: 140 lm/W

### APPLICATIONS

Shopping malls  
Modern Homes  
Restaurants  
Hotel Lobbies  
Corporate offices

# OLIVIA LED SPOT LIGHT





New

# OLIVIA LED SPOT LIGHT



White



Chrome



Antique Brass




New generation, Energy Saving, aesthetically designed, Recessed mounted down light Pressure die-cast Aluminum heat sink & high efficiency long life COB LED with high efficacy of 85 lm/W used for enhanced lumen output.

SAP Code	System Power (W)	Power Factor	Colour Temp. (CCT)	CRI	System Lumen (lm)	Colour of Fixture	Shape	UGR	Whole Sale (No.of unit/s)	Master Packing (No.of unit/s)
LHEEASPBIB1O005	5 W	> 0.90	3000 K	>80	380 lm	Antique brass	Round	<19	-	20 N
LHEEASPDIB1O005	5 W	> 0.90	4000 K	>80	425 lm	Antique brass	Round	<19	-	20 N
LHEEASPBIB1O010	10 W	> 0.90	3000 K	>80	765 lm	Antique brass	Round	<19	-	20 N
LHEEASPDIB1O010	10 W	> 0.90	4000 K	>80	850 lm	Antique brass	Round	<19	-	20 N
LHEEASPBIB1O020	20 W	> 0.90	3000 K	>80	1420 lm	Antique brass	Round	<19	-	12 N
LHEEASPDIB1O020	20 W	> 0.90	4000 K	>80	1600 lm	Antique brass	Round	<19	-	12 N
LHEEASPBIB1C005	5 W	> 0.90	3000 K	>80	380 lm	Chrome	Round	<19	-	20 N
LHEEASPDIB1C005	5 W	> 0.90	4000 K	>80	425 lm	Chrome	Round	<19	-	20 N
LHEEASPBIB1C010	10 W	> 0.90	3000 K	>80	765 lm	Chrome	Round	<19	-	20 N
LHEEASPDIB1C010	10 W	> 0.90	4000 K	>80	850 lm	Chrome	Round	<19	-	20 N
LHEEASPBIB1C020	20 W	> 0.90	3000 K	>80	1420 lm	Chrome	Round	<19	-	12 N
LHEEASPDIB1C020	20 W	> 0.90	4000 K	>80	1600 lm	Chrome	Round	<19	-	12 N
LHEEASPBIB1W005	5 W	> 0.90	3000 K	>80	380 lm	White	Round	<19	-	20 N
LHEEASPDIB1W005	5 W	> 0.90	4000 K	>80	425 lm	White	Round	<19	-	20 N
LHEEASPBIB1W010	10 W	> 0.90	3000 K	>80	765 lm	White	Round	<19	-	20 N
LHEEASPDIB1W010	10 W	> 0.90	4000 K	>80	850 lm	White	Round	<19	-	20 N
LHEEASPBIB1W020	20 W	> 0.90	3000 K	>80	1420 lm	White	Round	<19	-	12 N
LHEEASPDIB1W020	20 W	> 0.90	4000 K	>80	1600 lm	White	Round	<19	-	12 N

All fixtures are suitable for 230 V

## TECHNICAL DRAWING



## DIMENSIONS

System Power	Ø	Height (h)	Cutout Size
5 W	65 mm	61 mm	56 mm
10 W	85 mm	77 mm	77 mm
20 W	105 mm	110 mm	96 mm

All dimensions are in mm | Tolerance: ± 2 mm

## AVAILABLE REFLECTOR DEG.



## PRODUCT SPECIFICATIONS

### FEATURES

- Powder-coated die-cast aluminium housing
- Deep recessed diffuser for low-UGR Rating
- Available shapes: Round
- Efficacy: 85 lm/W

### APPLICATIONS

Shopping malls  
Modern Homes  
Restaurants  
Hotel Lobbies  
Corporate offices

# SPOTSHINE MAGNETIC TRACK LIGHT






New

# SPOTSHINE MAGNETIC TRACK LIGHT



MAGNETIC RECESSED  
EXTERNAL TRACK  
Track -1000 mm

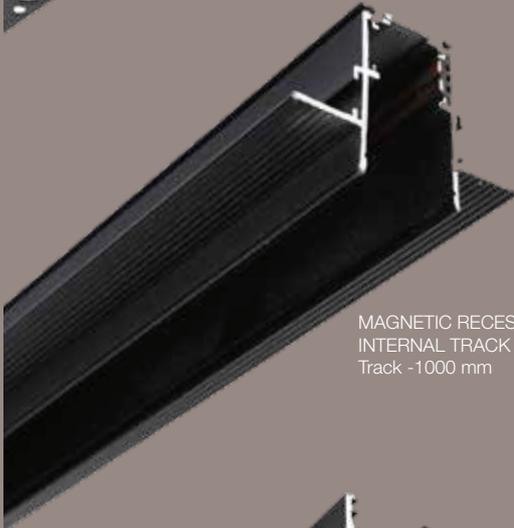


MAGNETIC RECESSED  
INTERNAL TRACK  
Track -1000 mm




MAGNETIC SURFACE  
MOUNTED TRACK  
Track -1000 mm

Recessed ( External)  
Horizontal Corner Joint



Recessed (External)  
Vertical Corner Joint



Recessed ( Internal)  
Horizontal Corner Joint



Recessed ( Internal)  
Vertical Corner Joint



Surface Mounted  
Horizontal corner Joint



Surface Mounted  
Vertical Corner Joint



Surface Mounted  
Connecting PCS



Type of Lighting Fixture that operates on a track system using magnets for mounting & positioning.




## TECHNICAL DATA

Item Name	SAP Code	SAP Description	Dimension (mm) W
External Track	LSSLNB0065	Magnetic Recessed External Track	W72.5*32*1000
Internal Track	LSSLNB0066	Magnetic Recessed Internal Track	W67*48*1000
Surface mounted Track	LSSLNB0067	Magnetic Surface Mounted Track	W28*H52*1000
Magnetic Track Recessed corner joint	LSSLNB0068	Recessed(External)horizontal corner joint	100*100*W69*H32
Magnetic Track Recessed corner joint	LSSLNB0069	Recessed (External)vertical corner joint	100*100*W69*H32
Magnetic Track Recessed corner joint	LSSLNB0070	Recessed(Internal)horizontal corner joint	100*100*W69*H32
Magnetic Track Recessed corner joint	LSSLNB0071	Recessed (Internal)vertical corner joint	100*100*W69*H32
Surface mounted corner joint	LSSLNB0072	Magnetic Surface mounted corner joint	100*100*51.5
Surface vertical corner joint	LSSLNB0084	Magnetic Surface vertical corner joint	100*100*51.5
Surface mounted connecting accessory	LSSLNB0073	Magnetic Surface mounted connecting pcs	80*23*2
Surface & Pendant Accessory	LSSLNB0074	Magnetic Surface & Pendant Accessories	80*22.5*1.5
Power Connector	LSSLNB0075	Magnetic Input power connector	570*17*H17
Power Connector	LSSLNB0076	Magnetic "I" Type power connector	175*17*H17
Power Connector	LSSLNB0077	Magnetic "L" Type power connector	342*17*H17
LED Driver	LSSLNB0078	Magnetic Power supply DC 48V 100W	235*22*25
LED Driver	LSSLNB0079	Magnetic Power supply DC 48V 200W	305*22*25

## ACCESSORIES WHICH IS COMMON FOR ALL

Product Code	Description	Acc. Type	LSSLNB0074	LSSLNB0075	LSSLNB0076
LSSLNB0074	MAGNETIC SURFACE & PENDANT ACCESSORIES	COMMON ACC.			
LSSLNB0075	MAGNETIC INPUT POWER CONNECTOR	CONNECTOR			
LSSLNB0076	MAGNETIC "I" TYPE POWER CONNECTOR				
LSSLNB0077	MAGNETIC "L" TYPE POWER CONNECTOR				
LSSLNB0078	MAGNETIC POWER SUPPLY DC 48V 100W	DRIVER*			
LSSLNB0079	MAGNETIC POWER SUPPLY DC 48V 200W				

## TECHNICAL DRAWING




## APPLICATIONS

Retail Spaces  
Galleries  
Museums  
High end Residential spaces

\*Where customizable & versatile lighting solution are desired.

New

# SPOTSHINE MAGNETIC GRILL LIGHT

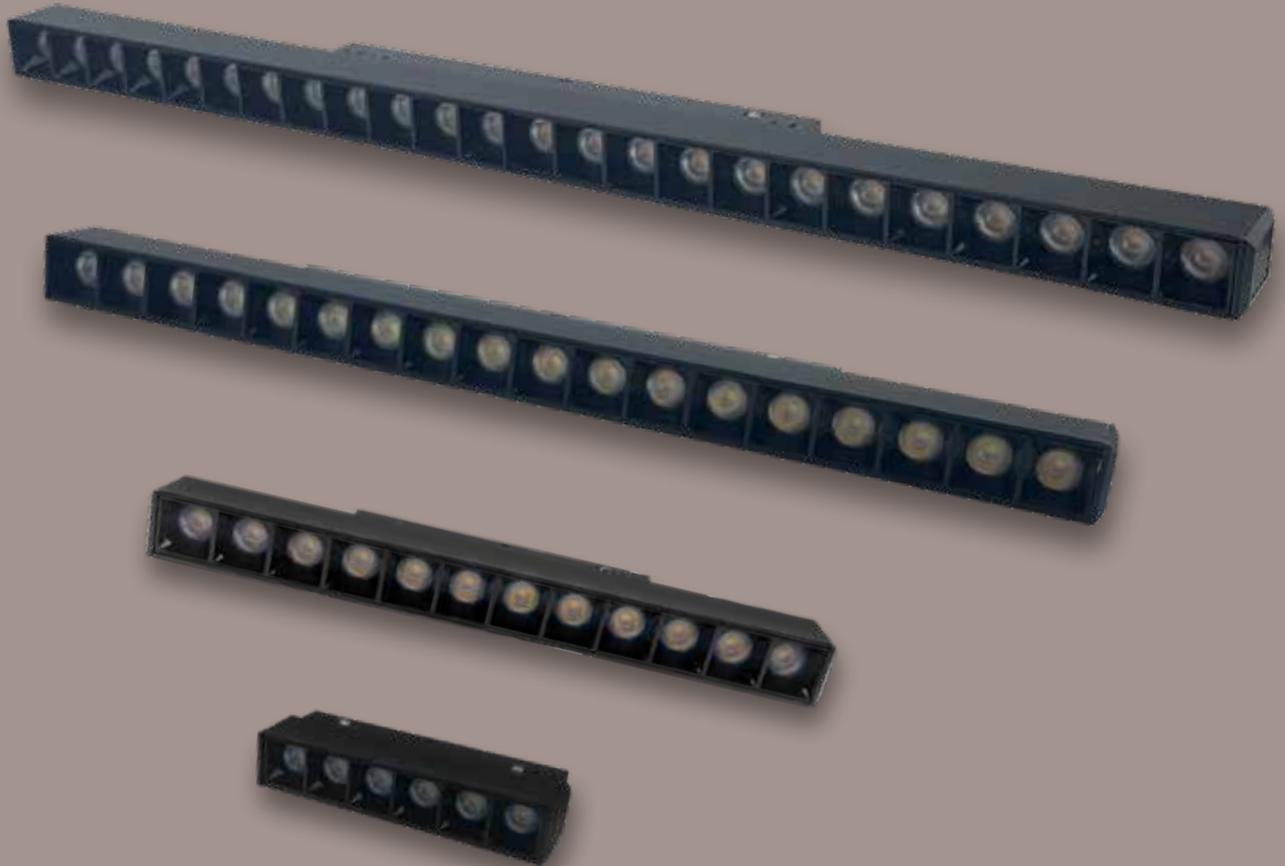

Magnetic Grill LED light with Modern design, compact Size with Lens to provide Focused light.


## TECHNICAL DATA

SAP Code	System Power (W)	Nominal Voltage (V Dc)	Colour Temp. (CCT)	CRI (Ra)	System Lumens (lm)	Colour of Fixture	UGR	Whole Sale (No.of unit/s)	Master Packing (No.of unit/s)
LHEFADP5PE1K006	6 W	48 V DC	3000 K	>80	480 lm	Black	-	-	4 N
LHEFADP6PE1K006	6 W	48 V DC	4000 K	>80	551 lm	Black	-	-	4 N
LHEFADP5PE1K012	12 W	48 V DC	3000 K	>80	1020 lm	Black	-	-	4 N
LHEFADP6PE1K012	12 W	48 V DC	4000 K	>80	1080 lm	Black	-	-	4 N
LHEFADP5PE1K018	18 W	48 V DC	3000 K	>80	1450 lm	Black	-	-	2 N
LHEFADP6PE1K018	18 W	48 V DC	4000 K	>80	1530 lm	Black	-	-	2 N
LHEFADP5PE1K024	24 W	48 V DC	3000 K	>80	2040 lm	Black	-	-	2 N
LHEFADP6PE1K024	24 W	48 V DC	4000 K	>80	2160 lm	Black	-	-	2 N

## TECHNICAL DATA (ELECTRONIC DRIVER )

SAP Code	System Power (W)	Nominal Voltage (V Dc)	Power Factor
MAGD01RT100	100 W	46 - 52 V	<0.5
MAGD01RT200	200 W	46 - 52 V	<0.5

## TECHNICAL DRAWING

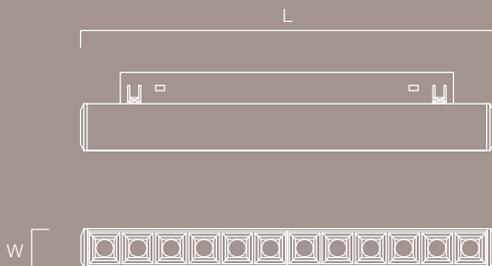

## DIMENSIONS

System Power	Length (l)	Width (w)
6 W	112 mm	22 mm
12 W	218 mm	22 mm
18 W	328 mm	22 mm
24 W	436 mm	22 mm

All dimensions are in mm | Tolerance:  $\pm 2$  mm


## PRODUCT SPECIFICATIONS

### FEATURES

- Pressure Die-cast aluminium housing (heat sink) with powder coated Sand Black finish.
- PC diffuser in clear finish for glare free uniform light distribution
- Efficacy: 140 lm/W

New

# SPOTSHINE MAGNETIC LINEAR LIGHT

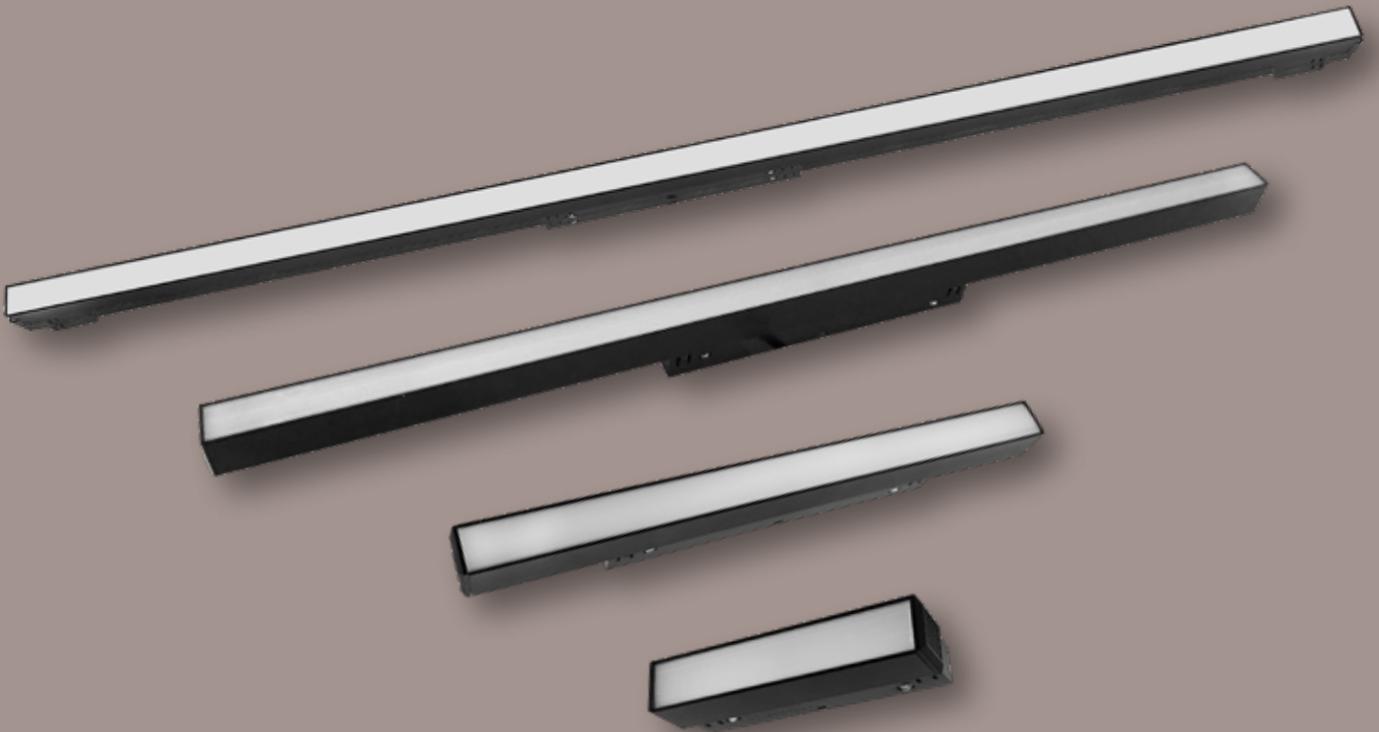

LED Linear Light to provide Diffused light.


## TECHNICAL DATA

SAP Code	System Power (W)	Nominal Voltage (V Dc)	Colour Temp. (CCT)	CRI (Ra)	System Lumens (lm)	Colour of Fixture	UGR	Whole Sale (No.of unit/s)	Master Packing (No.of unit/s)
LHEFACPBPE1K007	7 W	48 V DC	3000 K	≥80	250 lm	Black	-	-	4 N
LHEFACPDPE1K007	7 W	48 V DC	4000 K	≥80	305 lm	Black	-	-	4 N
LHEFACPBPE1K012	12 W	48 V DC	3000 K	≥80	600 lm	Black	-	-	4 N
LHEFACPDPE1K012	12 W	48 V DC	4000 K	≥80	700 lm	Black	-	-	4 N
LHEFACP5PE1K020	20 W	48 V DC	3000 K	≥80	990 lm	Black	-	-	2 N
LHEFACP6PE1K020	20 W	48 V DC	4000 K	≥80	1020 lm	Black	-	-	2 N
LHEFACP5PE1K030	30 W	48 V DC	3000 K	≥80	1690 lm	Black	-	-	2 N
LHEFACP6PE1K030	30 W	48 V DC	4000 K	≥80	1810 lm	Black	-	-	2 N

## TECHNICAL DATA (ELECTRONIC DRIVER )

SAP Code	System Power (W)	Nominal Voltage (V Dc)	Power Factor
MAGD01RT100	100 W	46 - 52 V	<0.5
MAGD01RT200	200 W	46 - 52 V	<0.5

## TECHNICAL DRAWING

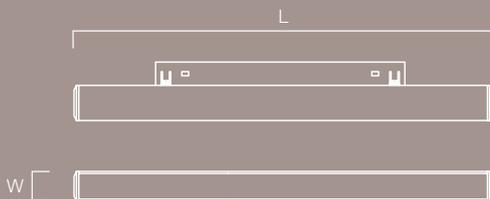

## DIMENSIONS

System Power	Length (l)	Width (w)
7 W	112 mm	22 mm
12 W	300 mm	22 mm
20 W	600 mm	22 mm
30 W	900 mm	22 mm

All dimensions are in mm | Tolerance: ± 2 mm

## PRODUCT SPECIFICATIONS

### FEATURES

- Pressure Die-cast aluminium housing (heat sink) with powder coated Sand Black finish.
- PC diffuser for glare free diffused light distribution

New

# SPOTSHINE MAGNETIC FOLD LIGHT



Magnetic Fold LED light with Modern design, compact Size with Lens and tiltable vertically to provide Focused light.


## TECHNICAL DATA

SAP Code	System Power (W)	Nominal Voltage (V Dc)	Colour Temp. (CCT)	CRI (Ra)	System Lumens (lm)	Colour of Fixture	UGR	Whole Sale (No.of unit/s)	Master Packing (No.of unit/s)
LHEFACPBPE1K007	7 W	48 V DC	3000 K	≥80	250 lm	Black	-	-	4 N
LHEFACPDPE1K007	7 W	48 V DC	4000 K	≥80	305 lm	Black	-	-	4 N
LHEFACPBPE1K012	12 W	48 V DC	3000 K	≥80	600 lm	Black	-	-	4 N
LHEFACPDPE1K012	12 W	48 V DC	4000 K	≥80	700 lm	Black	-	-	4 N

## TECHNICAL DATA (ELECTRONIC DRIVER )

SAP Code	System Power (W)	Nominal Voltage (V Dc)	Power Factor
MAGD01RT100	100 W	46 - 52 V	<0.5
MAGD01RT200	200 W	46 - 52 V	<0.5

## TECHNICAL DRAWING

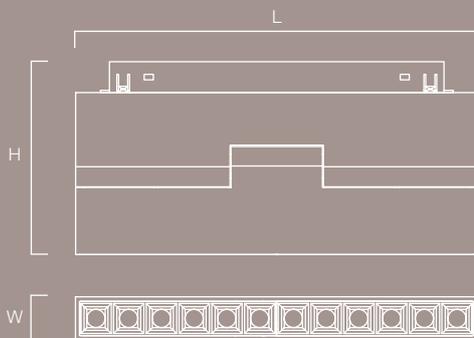

## DIMENSIONS

System Power	Length (l)	Width (w)	Height (h)
12 W	112 mm	108 mm	24 mm
24 W	220 mm	108 mm	24 mm

All dimensions are in mm | Tolerance: ± 2 mm

## PRODUCT SPECIFICATIONS

### FEATURES

- Pressure Die-cast aluminium housing (heat sink) with powder coated Sand Black finish.
- PC diffuser in clear finish for glare free uniform light distribution

New

# SPOTSHINE MAGNETIC TRACK LIGHT



Magnetic Track mounted LED light with Modern design, compact Size with High power COB LED to provide focused light.


## TECHNICAL DATA

SAP Code	System Power (W)	Nominal Voltage (V Dc)	Colour Temp. (CCT)	CRI (Ra)	System Lumens (lm)	Colour of Fixture	UGR	Whole Sale (No.of unit/s)	Master Packing (No.of unit/s)
LHEFAFP5IH1K012	12 W	48 V DC	3000 K	≥80	970 lm	Black	-	-	4 N
LHEFAFP6PH1K012	12 W	48 V DC	4000 K	≥80	1020 lm	Black	-	-	4 N

## TECHNICAL DATA (ELECTRONIC DRIVER )

SAP Code	System Power (W)	Nominal Voltage (V Dc)	Power Factor
MAGD01RT100	100 W	46 - 52 V	<0.5
MAGD01RT200	200 W	46 - 52 V	<0.5

## TECHNICAL DRAWING

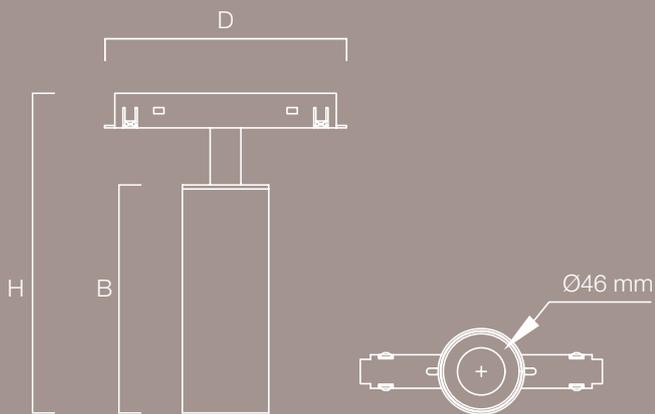

## DIMENSIONS

System Power	Ø	Height (h)
12 W	46 mm	110 mm

All dimensions are in mm | Tolerance: ± 2 mm

## PRODUCT SPECIFICATIONS

### FEATURES

- Pressure Die-cast aluminium housing (heat sink) with powder coated Sand Black finish.
- PC diffuser with lens for directed light beam angle

New

# SPOTSHINE MAGNETIC PENDANT LIGHT



Magnetic Pendant light with Modern design, compact Size with High power COB LED to provide focused light.


## TECHNICAL DATA

SAP Code	System Power (W)	Nominal Voltage (V Dc)	Colour Temp. (CCT)	CRI (Ra)	System Lumens (lm)	Colour of Fixture	UGR	Whole Sale (No.of unit/s)	Master Packing (No.of unit/s)
LHEFAFP5IH1K012	12 W	48 V DC	3000 K	≥80	970 lm	Black	-	-	4 N
LHEFAFP6PH1K012	12 W	48 V DC	4000 K	≥80	1020 lm	Black	-	-	4 N

## TECHNICAL DATA (ELECTRONIC DRIVER )

SAP Code	System Power (W)	Nominal Voltage (V Dc)	Power Factor
MAGD01RT100	100 W	46 - 52 V	<0.5
MAGD01RT200	200 W	46 - 52 V	<0.5

## TECHNICAL DRAWING

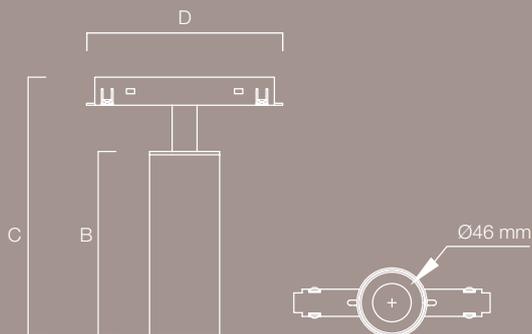

## DIMENSIONS

System Power	Ø	Height (h)
12 W	55 mm	300 mm

All dimensions are in mm | Tolerance: ± 2 mm

## PRODUCT SPECIFICATIONS

### FEATURES

- Pressure Die-cast aluminium housing (heat sink) with powder coated Sand Black finish.
- PC diffuser with lens for directed light beam angle

# STREEK TRACKLIGHT





# STREEK TRACKLIGHT



Streek Tracklight Black



Streek Tracklight White




Surface Spotlight with aluminum structure, available with adjustable light engine to achieve the desired illumination angle.

## TECHNICAL DATA

Ordering Code	System Power (W)	Power Factor	THD %	Colour Temp. (CCT)	CRI	System Lumens (lm)	Colour of Fixture	Beam Angle (°)	UGR	Whole Sale (No. of unit/s)	Master Packing (No. of unit/s)
LHEEANPBPH1K007	7 W	≥0.95	<10%	3000 K	>80	560 lm	Black	24°	<16	6 N	36 N
LHEEANPBPH1W007	7 W	≥0.95	<10%	3000 K	>80	560 lm	White	24°	<16	6 N	36 N
LHEEANPBPH1K012	12 W	≥0.95	<10%	3000 K	>80	960 lm	Black	24°	<16	6 N	36 N
LHEEANPBPH1W012	12 W	≥0.95	<10%	3000 K	>80	960 lm	White	24°	<16	6 N	36 N
LHEEANPBPH1K020	20 W	≥0.95	<10%	3000 K	>80	1600 lm	Black	30°	<16	6 N	24 N
LHEEANPBPH1W020	20 W	≥0.95	<10%	3000 K	>80	1600 lm	White	30°	<16	6 N	24 N
LHEEANPBPH1K030	30 W	≥0.95	<10%	3000 K	>80	2400 lm	Black	30°	<19	6 N	12 N
LHEEANPBPH1W030	30 W	≥0.95	<10%	3000 K	>80	2400 lm	White	30°	<19	6 N	12 N
LHEEANPDPH1K007	7 W	≥0.95	<10%	4000 K	>80	560 lm	Black	24°	<16	6 N	36 N
LHEEANPDPH1W007	7 W	≥0.95	<10%	4000 K	>80	560 lm	White	24°	<16	6 N	36 N
LHEEANPDPH1K012	12 W	≥0.95	<10%	4000 K	>80	960 lm	Black	24°	<16	6 N	36 N
LHEEANPDPH1W012	12 W	≥0.95	<10%	4000 K	>80	960 lm	White	24°	<16	6 N	36 N
LHEEANPDPH1K020	20 W	≥0.95	<10%	4000 K	>80	1600 lm	Black	30°	<16	6 N	24 N
LHEEANPDPH1W020	20 W	≥0.95	<10%	4000 K	>80	1600 lm	White	30°	<16	6 N	24 N
LHEEANPDPH1K030	30 W	≥0.95	<10%	4000 K	>80	2400 lm	Black	30°	<19	6 N	12 N
LHEEANPDPH1W030	30 W	≥0.95	<10%	4000 K	>80	2400 lm	White	30°	<19	6 N	12 N

All fixtures are suitable for 240 V

## TECHNICAL DRAWING

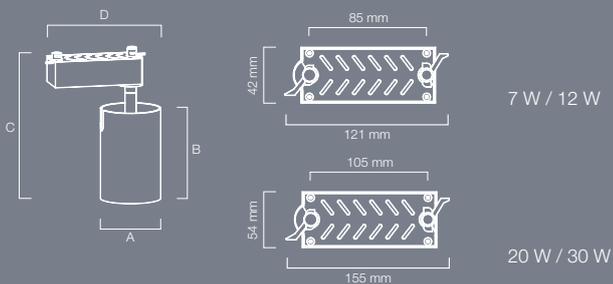


## DIMENSIONS

System Power (W)	Diameter ±0.5 (mm) (A)	Height ±0.5 (mm) of housing (B)	Total Height ±0.5 (mm) (C)	Length ±0.5 (mm) (D)
7 W	52 mm	85 mm	150 mm	130 mm
12 W	52 mm	90 mm	165 mm	130 mm
20 W	65 mm	110 mm	190 mm	160 mm
30 W	85 mm	130 mm	210 mm	170 mm

All dimensions are in mm | Tolerance: ± 2 mm

## AVAILABLE REFLECTOR DEG.



## PRODUCT SPECIFICATIONS

### FEATURES


- Elegant aluminum heat sink design for effective heat dissipation
- High performance electronic driver ensures zero maintenance
- Focused beam angle to highlight objects and artifacts
- Available in black and white color.

### APPLICATIONS



Modern Homes  
Shopping Malls  
Restaurants  
Hotel Lobbies  
Corporate Office

# COMPATIBILITY CHART

Product Code	Description	Case Lot
LSSLNW0192	LED STREEK Two Wire One Meter Track WHT	1
LSSLNW0193	LED STREEK Two Wire AC Supply Conn. WHT	10
LSSLNW0194	LED STREEK Two Wire "I" Connector WHT	10
LSSLNW0195	LED STREEK Two Wire "L" Connector WHT	10
LSSLNW0196	LED STREEK Two Wire "T" Connector WHT	5
LSSLNB0027	LED STREEK Two Wire One Meter Track BLK	1
LSSLNB0028	LED STREEK Two Wire AC Supply Conn. BLK	10
LSSLNB0029	LED STREEK Two Wire "I" Connector BLK	10
LSSLNB0030	LED STREEK Two Wire "L" Connector BLK	10
LSSLNB0031	LED STREEK Two Wire "T" Connector BLK	5

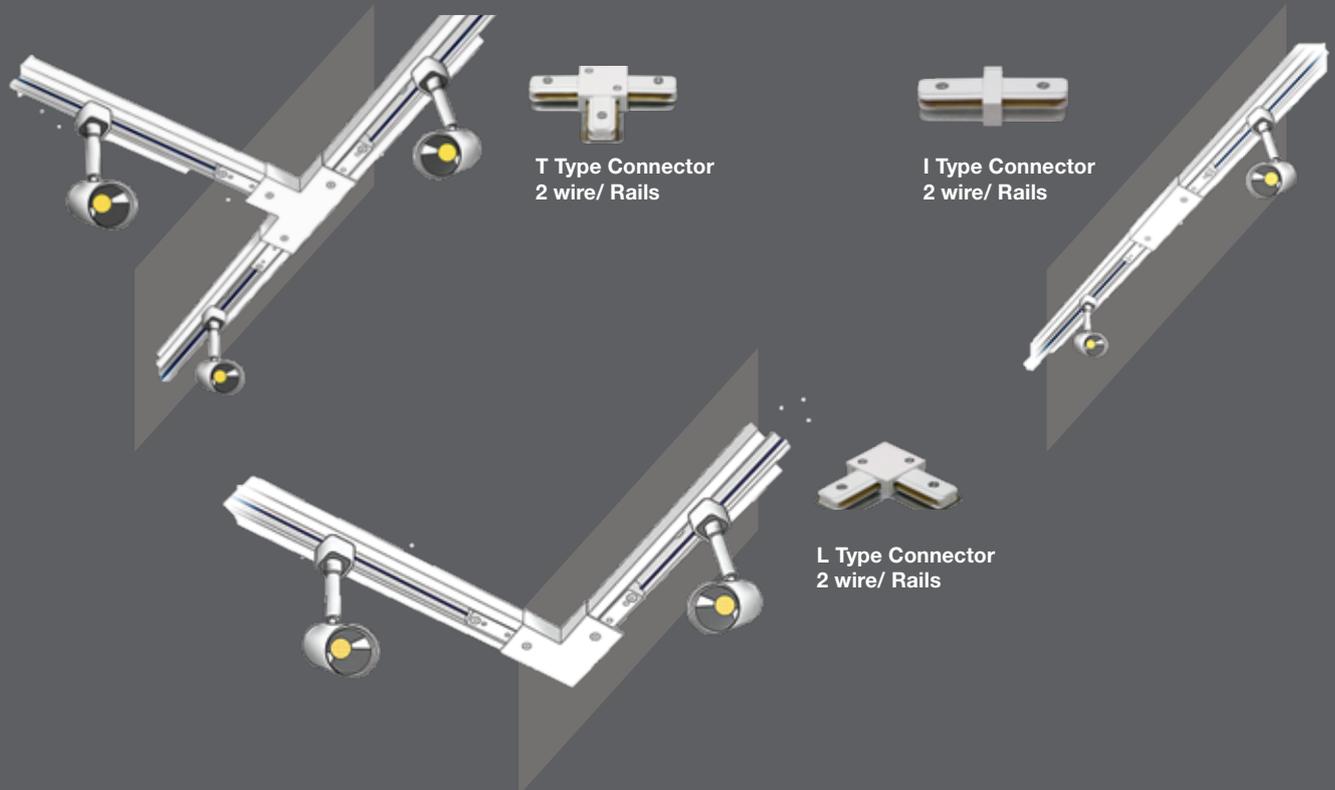


2 wire One Meter Track WHT



Two Wire  
"AC" Supply  
Connector WHT



Two Wire  
"I" Connector  
WHT



Two Wire  
"L" Connector  
WHT



Two Wire  
"T" Connector  
WHT

2 wire One Meter Track BLK



Two Wire  
"AC" Supply  
Connector BLK



Two Wire  
"I" Connector  
BLK



Two Wire  
"L" Connector  
BLK



Two Wire  
"T" Connector  
BLK

# EBACT CABINET LIGHT





# EBACT ROUND CABINET LIGHT




EBACT cabinet lights offers a comprehensive selection of options a kitchen can achieve unique lighting effects and workspace functionality

## TECHNICAL DATA

Ordering Code	Product Description	System Power	Colour Temp. (CCT)	Colour of Fixture	Whole Sale (No.of unit/s)	Master Packing (No.of unit/s)
LHEHAJPDIL1J3X5	LED EBACT Round Cabinet Light 3.5W 4K	3.5 W	4000 K	Silver Grey	6 N	24 N

NOTE : EBACT DRIVER TO BE CONSIDERED SEPARATELY.  
ALL FIXTURES ARE SUITABLE FOR INPUT VOLTAGE : 12 V DC

## TECHNICAL DRAWING

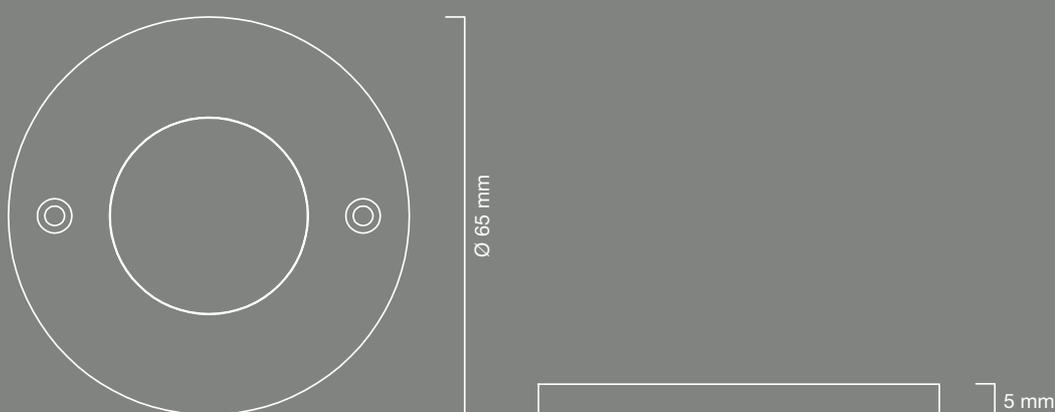

All dimensions are in mm | Tolerance:  $\pm 2$  mm

## PRODUCT SPECIFICATIONS

### FEATURES

- Dual functionality of Illumination and Disinfectant.
- Brightens up the inside of your cabinets and creates a cosy mood lighting
- Comes with a slim cable that is concealed under the cabinet

### APPLICATIONS

Kitchen cabinets  
Bath room Cabinets  
Wardrobes  
Book cases

# EBACT SQUARE CABINET LIGHT




EBACT cabinet lights offers a comprehensive selection of options a kitchen can achieve unique lighting effects and workspace functionality

## TECHNICAL DATA

Ordering Code	Product Description	System Power	Colour Temp. (CCT)	Colour of Fixture	Whole Sale (No.of unit/s)	Master Packing (No.of unit/s)
LHEHAJP6IL1W3X5	LED EBACT Square Cabinet Light 3.5W 4K	3.5 W	4000 K	Silver Grey	6 N	24 N

NOTE : EBACT DRIVER TO BE CONSIDERED SEPARATELY.  
ALL FIXTURES ARE SUITABLE FOR INPUT VOLTAGE : 12 V DC

## TECHNICAL DRAWING

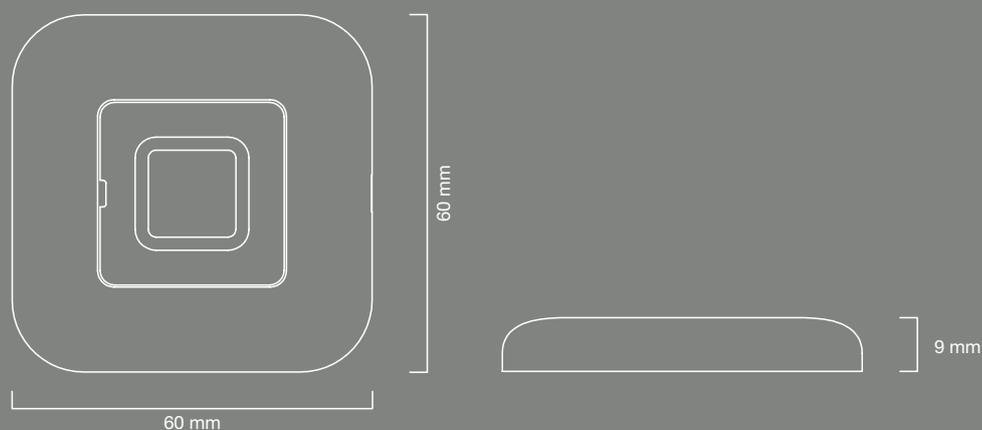

All dimensions are in mm | Tolerance:  $\pm 2$  mm

## PRODUCT SPECIFICATIONS

### FEATURES

- Dual functionality of Illumination and Disinfectant.
- Brightens up the inside of your cabinets and creates a cosy mood lighting
- Comes with a slim cable that is concealed under the cabinet

### APPLICATIONS

Kitchen cabinets  
Bath room Cabinets  
Wardrobes  
Book cases

# EBACT L-SHAPE CABINET LIGHT



EBACT cabinet lights offers a comprehensive selection of options a kitchen can achieve unique lighting effects and workspace functionality


## TECHNICAL DATA

Ordering Code	Product Description	System Power	Colour Temp. (CCT)	Colour of Fixture	Whole Sale (No.of unit/s)	Master Packing (No.of unit/s)
LHEHAJP6IL1J4X5	LED EBACT L-Shape Cabinet Light 4.5W 4K	4.5 W	4000 K	Silver	4 N	24 N

NOTE : EBACT DRIVER TO BE CONSIDERED SEPARATELY.

ALL FIXTURES ARE SUITABLE FOR INPUT VOLTAGE : 12 V DC

## TECHNICAL DRAWING

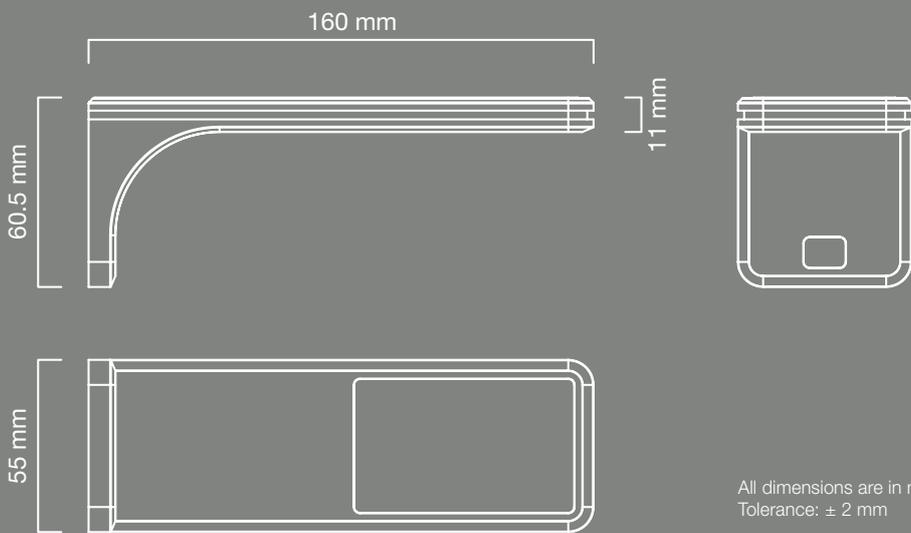

## PRODUCT SPECIFICATIONS

### FEATURES

- The lighting enhances the atmosphere and gives a good overview of things under shelf
- EBACT Rect cabinet light is perfect kitchen and Dinning undershelf zones
- Comes with a slim cable that is concealed under the cabinet

### APPLICATIONS

Kitchen cabinets & under shelves  
Wardrobes  
Dinning Zones

# EBACT OVAL CABINET LIGHT



EBACT cabinet lights offers a comprehensive selection of options a kitchen can achieve unique lighting effects and workspace functionality


## TECHNICAL DATA

Ordering Code	Product Description	System Power	Colour Temp. (CCT)	Colour of Fixture	Whole Sale (No.of unit/s)	Master Packing (No.of unit/s)
LHEHAJP6NE1J3X5	LED EBACT Oval Cabinet Light 3.5W 4K	3.5 W	4000 K	Silver Grey	4 N	24 N

NOTE : EBACT DRIVER TO BE CONSIDERED SEPARATELY.  
ALL FIXTURES ARE SUITABLE FOR INPUT VOLTAGE : 12 V DC

- Is mounted inside the cabinet
- Open the door the light turns on
- Close the door the light turns off

## TECHNICAL DRAWING

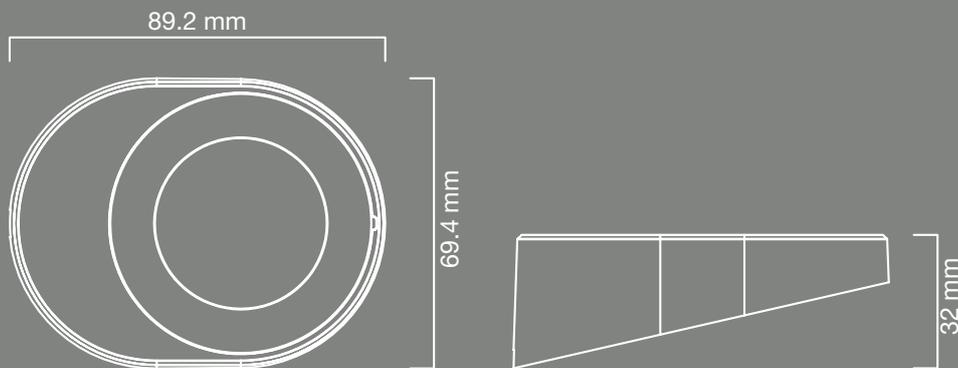

All dimensions are in mm | Tolerance:  $\pm 2$  mm

## PRODUCT SPECIFICATIONS

### FEATURES

- Dual functionality of Illumination and Disinfectant.
- Brightens up the inside of your cabinets and comes with IR door sensor
- Is mounted inside the cabinet :Open the door the light turns on ; Close the door the light turns off
- Comes with a slim cable that is concealed under the cabinet

### APPLICATIONS

Kitchen cabinets  
Bath room Cabinets  
Wardrobes

# EBACT RECT CABINET LIGHT



EBACT cabinet lights offers a comprehensive selection of options a kitchen can achieve unique lighting effects and workspace functionality



## TECHNICAL DATA

Ordering Code	Product Description	System Power	Colour Temp. (CCT)	Colour of Fixture	Whole Sale (No.of unit/s)	Master Packing (No.of unit/s)
LHEHAJP6IL1J004	LED EBACT Rect. Cabinet Light 4W 4K	4 W	4000 K	Silver Grey	6 N	24 N
LHEHAJP6NL1J004	LED EBACT Rect. Cabinet Light 4W 4K with Sensor	4 W	4000 K	Silver Grey	6 N	24 N

NOTE : EBACT DRIVER TO BE CONSIDERED SEPARATELY.  
ALL FIXTURES ARE SUITABLE FOR INPUT VOLTAGE : 12 V DC

- Is mounted inside the cabinet
- Open the door the light turns on
- Close the door the light turns off

## TECHNICAL DRAWING

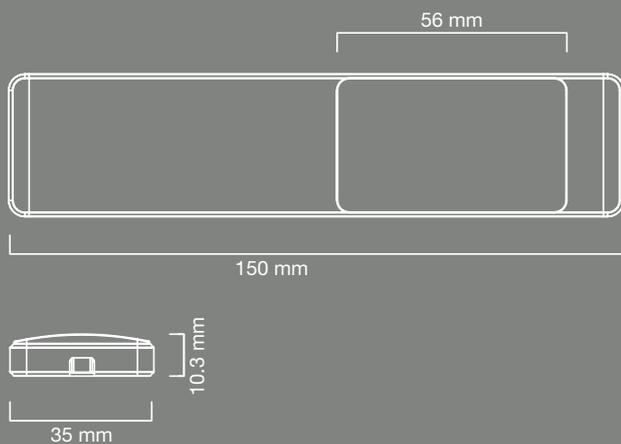

All dimensions are in mm | Tolerance:  $\pm 2$  mm

## PRODUCT SPECIFICATIONS


### FEATURES

- The lighting enhances the atmosphere and gives a good overview of things under shelf
- EBACT Rect cabinet light is perfect kitchen and Dining undershelf zones
- Loop in loop out arrangement
- Wave hand to control light
- Comes with a slim cable that is concealed under the cabinet

### APPLICATIONS

Kitchen cabinets & under shelves  
Wardrobes  
Dinning Zones

# COMPATIBILITY CHART

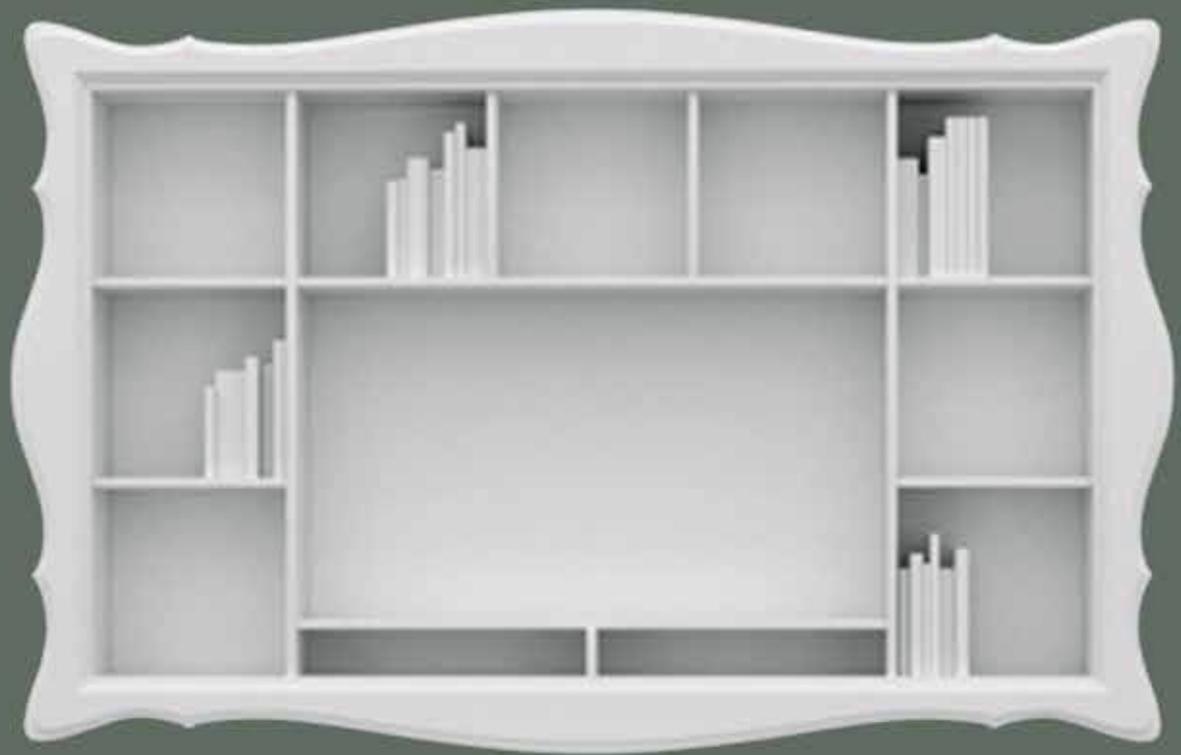

## TECHNICAL DATA

Product Name	Wattage (W)	Number of cabinet lights connected with 30w Driver	Number of cabinet lights connected with 15 W Driver
EBACT L-Shape	4.5 W	6 N	3 N
Ebact Square	3.5 W	8 N	4 N
EBACT Rect	4 W	7 N	4 N
EBACT Rect ( sensor)	4 W	7 N	4 N
EBACT Oval (IR sensor)	3.5 W	8 N	4 N
Ebact Round	3.5 W	8 N	4 N

Code	Description	Middle Box	Master Box
LSSLNW0228	EBACT Driver 15W 4 Way	4 N	24 N
LSSLNW0229	EBACT Driver 30W 6 Way	4 N	24 N
LSSLNW0230	EBACT Connection Box 3 Way	8 N	48 N
LSSLNW0231	EBACT Connection Box 6 Way	8 N	48 N
LSSLNW0232	EBACT Connection Cable 1M	8 N	48 N
LSSLNW0233	EBACT Connection Cable 2M	8 N	48 N



**Ebact  
L Shape**



**Ebact  
Square**



**Ebact  
Round**



**Ebact  
Rect**



**Ebact  
Rect ( sensor )**



**Ebact  
Oval ( IR sensor )**

# PRICE LIST

Ordering code	Product description	Whole Sale (No.of unit/s)	Master Packing (No.of unit/s)	MRP Rs. ₹ Per Unit (Incl. of all taxes)
LHEEBBPDPG1W008	LED ESPERANZA Ring Spot light 8W 4K	8 N	24 N	₹ 2800.00
LHEEBBPDPG1W008	LED ESPERANZA Ring Spot light 8W 3K	8 N	24 N	₹ 2800.00
LHEEBBPDPG1W015	LED ESPERANZA Ring Spot Light 15W 4K	6 N	24 N	₹ 4000.00
LHEEBBPDPG1W015	LED ESPERANZA Ring Spot Light 15W 3K	6 N	24 N	₹ 4000.00
LSSLNW0259	LED ESPERANZA Ring Spot attach 8W 4K	6 N	24 N	₹ 2800.00
LSSLNW0260	LED ESPERANZA Ring Spot attach 8W 3K	6 N	24 N	₹ 2800.00
LSSLNW0263	LED ESPERANZA Honeycomb Spot attach 8W 4K	8 N	24 N	₹ 2800.00
LSSLNW0264	LED ESPERANZA Honeycomb Spot attach 8W 3K	8 N	24 N	₹ 2800.00
LSSLNW0265	LED ESPERANZA Down lighter attach 7W 4K	6 N	24 N	₹ 2600.00
LSSLNW0266	LED ESPERANZA Down lighter attach 7W 3K	6 N	24 N	₹ 2600.00
LHEEBBPDPG1W020	LED ESPERANZA Ring Spot Light 20W 4K	8 N	24 N	₹ 5000.00
LHEEBBPDPG1W020	LED ESPERANZA Ring Spot Light 20W 3K	8 N	24 N	₹ 5000.00
LSSLNW0261	LED ESPERANZA Ring Spot attach 15W 4K	6 N	24 N	₹ 4000.00
LSSLNW0262	LED ESPERANZA Ring Spot attach 15W 3K	6 N	24 N	₹ 4000.00
LSSLNW0269	LED ESPERANZA HoneycombSpot attach12W 4K	8 N	24 N	₹ 3900.00
LSSLNW0270	LED ESPERANZA HoneycombSpot attach12W 3K	8 N	24 N	₹ 3900.00
LSSLNW0267	LED ESPERANZA Down lighter attach 10W 4K	6 N	24 N	₹ 3700.00
LSSLNW0268	LED ESPERANZA Down lighter attach 10W 3K	6 N	24 N	₹ 3700.00
LSSLNW0273	" ESPERANZA Ring Spot Cover Attachment 15W"	6 N	60 N	₹ 200.00
LSSLNW0274	" ESPERANZA Ring Spot Cover Attachment 20W"	6 N	60 N	₹ 300.00
LHEEAPPBPO1W003	LED SPOTSHINE Linear light 3W 3K	6 N	24 N	₹ 1350.00
LHEEAPPDPO1W003	LED SPOTSHINE Linear light 3W 4K	6 N	24 N	₹ 1350.00
LHEEAPPRPO1W006	LED SPOTSHINE Linear light 6W 3K	6 N	24 N	₹ 2050.00
LHEEAPPTPO1W006	LED SPOTSHINE Linear light 6W 4K	6 N	24 N	₹ 2050.00
LHEEAPPAPO1W010	LED SPOTSHINE Linear light 10W 3K	6 N	24 N	₹ 3150.00
LHEEAPPEPO1W010	LED SPOTSHINE Linear light 10W 4K	6 N	24 N	₹ 3150.00
LHEEAPP5PO1W020	LED SPOTSHINE Linear light 20W 3K	4 N	24 N	₹ 7950.00
LHEEAPP6PO1W020	LED SPOTSHINE Linear light 20W 4K	4 N	24 N	₹ 7950.00
LHEEAPP5PO1W030	LED SPOTSHINE Linear light 30W 3K	4 N	24 N	₹ 10500.00
LHEEAPP6PO1W030	LED SPOTSHINE Linear light 30W 4K	4 N	24 N	₹ 10500.00
LHEECBPDPG1W010	LED MINOS Trimless COB Spot Light 10W 4K	6 N	24 N	₹ 2900.00
LHEECBPBPG1W010	LED MINOS Trimless COB Spot Light 10W 3K	6 N	24 N	₹ 2900.00
LHEECBPDPG1W015	LED MINOS Trimless COB Spot Light 15W 4K	6 N	24 N	₹ 3800.00
LHEECBPBPG1W015	LED MINOS Trimless COB Spot Light 15W 3K	6 N	24 N	₹ 3800.00
LSSLNW0275	MINOS TRIMLESS RING ATTACH 10W COB WHITE	6 N	60 N	₹ 350.00
LSSLNB0049	MINOS TRIMLESS RING ATTACH 10WCOB GRAPHITE	6 N	60 N	₹ 350.00
LSSLNC0023	MINOS TRIMLESS RING ATTACH 10WCOB CHROME	6 N	60 N	₹ 350.00
LSSLNW0276	MINOS TRIMLESS RING ATTACH 15W COB WHITE	6 N	60 N	₹ 400.00
LSSLNB0050	MINOS TRIMLESS RING ATTACH 15WCOB GRAPHITE	6 N	60 N	₹ 400.00
LSSLNC0024	MINOS TRIMLESS RING ATTACH 15WCOB CHROME	6 N	60 N	₹ 400.00
LHEECEPDPG1W007	LED MINOS COB Spot Light 7W 4K	8 N	24 N	₹ 2600.00
LHEECEPBPG1W007	LED MINOS COB Spot Light 7W 3K	8 N	24 N	₹ 2600.00
LHEECEPDPG1W012	LED MINOS COB Spot Light 12W 4K	6 N	24 N	₹ 3000.00
LHEECEPBPG1W012	LED MINOS COB Spot Light 12W 3K	6 N	24 N	₹ 3000.00
LHEECEPDPG1W020	LED MINOS COB Spot Light 20W 4K	6 N	24 N	₹ 4000.00
LHEECEPBPG1W020	LED MINOS COB Spot Light 20W 3K	6 N	24 N	₹ 4000.00

# PRICE LIST

Ordering code	Product description	Whole Sale (No.of unit/s)	Master Packing (No.of unit/s)	MRP Rs. ₹ Per Unit (Incl. of all taxes)
LSSLNW0277	MINOS RING ATTACHMENT 7 W COB WHITE	6 N	60 N	₹ 280.00
LSSLNB0051	MINOS RING ATTACHMENT 7 W COB GRAPHITE	6 N	60 N	₹ 280.00
LSSLNC0025	MINOS RING ATTACHMENT 7 W COB CHROME	6 N	60 N	₹ 280.00
LSSLNW0278	MINOS RING ATTACHMENT 12 W COB WHITE	6 N	60 N	₹ 350.00
LSSLNB0052	MINOS RING ATTACHMENT 12 W COB GRAPHITE	6 N	60 N	₹ 350.00
LSSLNC0026	MINOS RING ATTACHMENT 12 W COB CHROME	6 N	60 N	₹ 350.00
LSSLNW0279	MINOS RING ATTACHMENT 20 W COB WHITE	6 N	60 N	₹ 410.00
LSSLNB0053	MINOS RING ATTACHMENT 20 W COB GRAPHITE	6 N	60 N	₹ 410.00
LSSLNC0027	MINOS RING ATTACHMENT 20 W COB CHROME	6 N	60 N	₹ 410.00
LHEBAFPDPB1W005	LED Azstro COB Downlight 5W 4K WHT	8 N	24 N	₹ 1800.00
LHEBAFPBPB1W005	LED Azstro COB Downlight 5W 3K WHT	8 N	24 N	₹ 1800.00
LHEBAFPDPB1W010	LED Azstro COB Downlight 10W 4K WHT	6 N	24 N	₹ 2300.00
LHEBAFPBPB1W010	LED Azstro COB Downlight 10W 3K WHT	6 N	24 N	₹ 2300.00
LHEBAFPDPB1W015	LED Azstro COB Downlight 15W 4K WHT	6 N	24 N	₹ 2850.00
LHEBAFPBPB1W015	LED Azstro COB Downlight 15W 3K WHT	6 N	24 N	₹ 2850.00
LSSLNW0280	AZSTRO RING ATTACHMENT 5 W COB WHITE	6 N	60 N	₹ 250.00
LSSLNY0035	AZSTRO RING ATTACHMENT 5 W COB ROSEGOLD	6 N	60 N	₹ 250.00
LSSLNC0028	AZSTRO RING ATTACHMENT 5 W COB CHROME	6 N	60 N	₹ 250.00
LSSLNW0281	AZSTRO RING ATTACHMENT 10 W COB WHITE	6 N	60 N	₹ 300.00
LSSLNY0036	AZSTRO RING ATTACHMENT 10W COB ROSEGOLD	6 N	60 N	₹ 300.00
LSSLNC0029	AZSTRO RING ATTACHMENT 10 W COB CHROME	6 N	60 N	₹ 300.00
LSSLNW0282	AZSTRO NEW RING ATTACHMENT 15W COB WHITE	6 N	60 N	₹ 375.00
LSSLNY0037	AZSTRO NEW RING ATTACHMENT 15W ROSEGOLD	6 N	60 N	₹ 375.00
LSSLNC0030	AZSTRO NEW RING ATTACHMENT 15WCOB CHROME	6 N	60 N	₹ 375.00
LHEBAFPAIE1K007	LED Azstro COB Downlight 7W 2700k	12 N	48 N	₹ 1840.00
LHEBAFPDIE1K007	LED Azstro COB Downlight 7W 4000k	12 N	48 N	₹ 1840.00
LHEBAFPAIE1K015	LED Azstro COB Downlight 15W 2700K	8 N	24 N	₹ 2760.00
LHEBAFPDIE1K015	LED Azstro COB Downlight 15W 4000K	8 N	24 N	₹ 2760.00
LHEBAFPAIE1K020	LED Azstro COB Downlight 20W 2700K	8 N	24 N	₹ 3335.00
LHEBAFPDIE1K020	LED Azstro COB Downlight 20W 4000K	8 N	24 N	₹ 3335.00
LSSLNW0173	Azstro Ring attachment 7W COB White	6 N	60 N	₹ 109.00
LSSLNA0017	Azstro Ring attachment 7W COB Copper	6 N	60 N	₹ 127.00
LSSLNY0017	Azstro Ring attachment 7W COB Gold	6 N	60 N	₹ 127.00
LSSLNW0174	Azstro Ring attachment 15W COB White	6 N	60 N	₹ 224.00
LSSLNA0018	Azstro Ring attachment 15W COB Copper	6 N	60 N	₹ 247.00
LSSLNY0018	Azstro Ring attachment 15W COB Gold	6 N	60 N	₹ 247.00
LSSLNW0175	Azstro Ring attachment 20W COB White	6 N	30 N	₹ 311.00
LSSLNA0019	Azstro Ring attachment 20W COB Copper	6 N	30 N	₹ 327.00
LSSLNY0019	Azstro Ring attachment 20W COB Gold	6 N	30 N	₹ 328.00
LHEBAFPBPB1J7X5	LED Azstro COB Module GRY 7.5 W 3000K	12 N	24 N	₹ 1601.00
LHEBAFPDPB1J7X5	LED Azstro COB Module GRY 7.5 W 4000K	12 N	24 N	₹ 1601.00
LHEBAFPBPZ1J013	LED Azstro COB Module GRY 13 W 3000K	8 N	24 N	₹ 2214.00
LHEBAFPDPZ1J013	LED Azstro COB Module GRY 13 W 4000K	8 N	24 N	₹ 2214.00
LSSLNW0218	LED Dimmable DRIVER 7.5 W*	12 N	24 N	₹ 779.00
LSSLNW0220	LED Non-Dimmable DRIVER 7.5 W	12 N	24 N	₹ 228.00
LSSLNW0219	LED Dimmable DRIVER 13 W*	12 N	24 N	₹ 843.00
LSSLNW0221	LED Non-Dimmable DRIVER 13 W	12 N	24 N	₹ 291.00

# PRICE LIST

Ordering code	Product description	Whole Sale (No.of unit/s)	Master Packing (No.of unit/s)	MRP Rs. ₹ Per Unit (Incl. of all taxes)
LSSLNB0036	Azstro Module Ring 7.5 W Fixed BLK	-	24 N	₹ 127.00
LSSLNW0214	Azstro Module Ring 7.5 W Fixed WHT	-	24 N	₹ 127.00
LSSLNW0215	Azstro Module Ring 7.5 W Swivel BLK	-	24 N	₹ 152.00
LSSLNB0037	Azstro Module Ring 7.5 W Swivel WHT	-	24 N	₹ 152.00
LSSLNB0038	Azstro Module Ring 13 W Fixed BLK	-	24 N	₹ 253.00
LSSLNW0216	Azstro Module Ring 13 W Fixed WHT	-	24 N	₹ 253.00
LSSLNB0039	Azstro Module Ring 13 W Swivel BLK	-	24 N	₹ 278.00
LSSLNW0217	Azstro Module Ring 13 W Swivel WHT	-	24 N	₹ 278.00
LHEECDPDPG6W010	LED Azstro COB Downlight 10W 4K IP65 SW	6 N	24 N	₹ 2800.00
LHEECDPBP6G6W010	LED Azstro COB Downlight 10W 3K IP65 SW	6 N	24 N	₹ 2800.00
LHEECCDPG6W010	LED Azstro COB Downlight 10W 4K IP65 Fxd	6 N	24 N	₹ 2500.00
LHEECCBP6G6W010	LED Azstro COB Downlight 10W 3K IP65 Fxd	6 N	24 N	₹ 2500.00
LHEEAHPAG1K007	LED Arica COB 7.5W 2700K BLK	12 N	24 N	₹ 1950.00
LHEEAHPDG1K007	LED Arcia COB 7.5W 4000k BLK	12 N	24 N	₹ 1950.00
LHEEAHPBG1W007	LED Arica COB 7.5W 2700K WHT	12 N	24 N	₹ 1950.00
LHEEAHPDG1W007	LED Arcia COB 7.5W 4000K WHT	12 N	24 N	₹ 1950.00
LHEEAHPAG1K012	LED Arica COB 13W 2700K BLK	12 N	24 N	₹ 2550.00
LHEEAHPDG1K012	LED Arcia COB 13W 4000k BLK	12 N	24 N	₹ 2550.00
LHEEAHPBG1W012	LED Arica COB 13W 2700K WHT	12 N	24 N	₹ 2550.00
LHEEAHPDG1W012	LED Arcia COB 13W COB 4000K WHT	12 N	24 N	₹ 2550.00
LHEEAIPBG1K007	LED Azar COB 7.5W 2700K BLK	12 N	24 N	₹ 2185.00
LHEEAIPDG1K007	LED Azar COB 7.5W 4000K BLK	12 N	24 N	₹ 2185.00
LHEEAIPBG1W007	LED Azar COB 7.5W 2700K WHT	12 N	24 N	₹ 2185.00
LHEEAIPDG1W007	LED Azar COB 7.5W 4000K WHT	12 N	24 N	₹ 2185.00
LHEEAJPBG1K012	LED Empiria COB 13W 2700K BLK	12 N	24 N	₹ 2645.00
LHEEAJPDG1K012	LED Empiria COB 13W 4000K BLK	12 N	24 N	₹ 2645.00
LHEEAJPBG1W012	LED Empiria COB 13W 2700K WHT	12 N	24 N	₹ 2645.00
LHEEAJPDG1W012	LED Empiria COB 13W 4000K WHT	12 N	24 N	₹ 2645.00
LHEEAKPDIE1K007	LED Floures Surface spot BLK 7W 4000K	12 N	24 N	₹ 1725.00
LHEEAKPDIE1W007	LED Floures Surface Spot WHT 7W 4000K	12 N	24 N	₹ 1725.00
LHEEAKPDIE1T007	LED Floures Surface Spot ABR 7W 4000K	12 N	24 N	₹ 1725.00
LHEEAKPDIE1H007	LED Floures Surface Spot BRZ 7W 4000K	12 N	24 N	₹ 1725.00
LHEEAKPDIE1K012	LED Floures Surface Spot BLK 12W 4000K	12 N	24 N	₹ 2415.00
LHEEAKPDIE1W012	LED Floures Surface Spot WHT 12W 4000K	12 N	24 N	₹ 2415.00
LHEEAKPDIE1K018	LED Floures Surface Spot BLK 18W 4000K	8 N	16 N	₹ 3335.00
LHEEAKPDIE1W018	LED Floures Surface Spot WHT 18 W 4000K	8 N	16 N	₹ 3335.00
LHEEAKPBIE1K007	LED Floures Surface Spot BLK 7W 3000K	12 N	24 N	₹ 1725.00
LHEEAKPBIE1W007	LED Floures Surface Spot WHT 7W 3000K	12 N	24 N	₹ 1725.00
LHEEAKPBIE1H007	LED Floures Surface Spot BRZ 7W 3000K	12 N	24 N	₹ 1725.00
LHEEAKPBIE1T007	LED Floures Surface Spot ABR 7W 3000K	12 N	24 N	₹ 1725.00
LHEEAKPBIE1K012	LED Floures Surface Spot BLK 12 W 3000K	12 N	24 N	₹ 2415.00
LHEEAKPBIE1W012	LED Floures Surface Spot WHT 12 W 3000K	12 N	24 N	₹ 2415.00
LHEEAKPBIE1K018	LED Floures Surface Spot BLK 18 W 3000K	8 N	16 N	₹ 2415.00
LHEEAKPBIE1W018	LED Floures Surface Spot WHT 18 W 3000K	8 N	16 N	₹ 3335.00
LHEEAFPDIG1K005	LED Unispot Round BLK 5W 4000K	8 N	24 N	₹ 2875.00
LHEEAFPLIG1K010	LED Duospot Round BLK 10W 4000K	8 N	24 N	₹ 4025.00
LHEEAFPDIG1W005	LED Unispot Round WHT 5W 4000K	8 N	24 N	₹ 2875.00
LHEEAFPLIG1W010	LED Duospot Round WHT 10W 4000K	8 N	24 N	₹ 4025.00

# PRICE LIST

Ordering code	Product description	Whole Sale (No.of unit/s)	Master Packing (No.of unit/s)	MRP Rs. ₹ Per Unit (Incl. of all taxes)
LHEEAFBIG1W005	LED Unispot Surface Round WHT 5W 3000K	8 N	24 N	₹ 2875.00
LHEEAFBIG1K005	LED Unispot Surface Round BLK 5W 3000K	8 N	24 N	₹ 2875.00
LHEEAFBIG1W010	LED Duospot Surface Round WHT 10W 3000K	8 N	24 N	₹ 4025.00
LHEEAFBIG1K010	LED Duospot Surface Round BLK 10W 3000K	8 N	24 N	₹ 4025.00
LHEBAOP5PZ1W008	LED Luminato Recess Panel RD 8 W 3000K	12 N	24 N	₹ 1202.00
LHEAOP6PZ1W008	LED Luminato Recess Panel RD 8 W 4000K	12 N	24 N	₹ 1202.00
LHEAOP7PZ1W008	LED Luminato Recess Panel RD 8 W 5700K	12 N	24 N	₹ 1202.00
LHEBAOP5PZ1W015	LED Luminato Recess Panel RD 15 W 3000K	8 N	24 N	₹ 1645.00
LHEAOP6PZ1W015	LED Luminato Recess Panel RD 15 W 4000K	8 N	24 N	₹ 1645.00
LHEAOP7PZ1W015	LED Luminato Recess Panel RD 15 W 5700K	8 N	24 N	₹ 1645.00
LHEBAOP5PZ1W022	LED Luminato Recess Panel RD 22 W 3000K	6 N	12 N	₹ 2404.00
LHEAOP6PZ1W022	LED Luminato Recess Panel RD22 W 4000K	6 N	12 N	₹ 2404.00
LHEAOP7PZ1W022	LED Luminato Recess Panel RD 22 W 5700K	6 N	12 N	₹ 2404.00
LHEBAPP5PZ1W008	LED Luminato Recess Panel SQ 8 W 3000K	12 N	24 N	₹ 1202.00
LHEAPP6PZ1W008	LED Luminato Recess Panel SQ 8 W 4000K	12 N	24 N	₹ 1202.00
LHEAPP7PZ1W008	LED Luminato Recess Panel SQ 8 W 5700K	12 N	24 N	₹ 1202.00
LHEBAPP5PZ1W015	LED Luminato Recess Panel SQ 15 W 3000K	8 N	24 N	₹ 1645.00
LHEAPP6PZ1W015	LED Luminato Recess Panel SQ 15 W 4000K	8 N	24 N	₹ 1645.00
LHEAPP7PZ1W015	LED Luminato Recess Panel SQ 15 W 5700K	8 N	24 N	₹ 1645.00
LHEBAPP5PZ1W022	LED Luminato Recess Panel SQ 22 W 3000K	6 N	12 N	₹ 2404.00
LHEAPP6PZ1W022	LED Luminato Recess Panel SQ 22 W 4000K	6 N	12 N	₹ 2404.00
LHEAPP7PZ1W022	LED Luminato Recess Panel SQ 22 W 5700K	6 N	12 N	₹ 2404.00
LHEHBRP5IL1W010	LED LUMINATO DEEP RECESS DL RD 10W 3K	-	12 N	₹ 1410.00
LHEHBRP6IL1W010	LED LUMINATO DEEP RECESS DL RD 10W 4K	-	12 N	₹ 1410.00
LHEHBRP7IL1W010	LED LUMINATO DEEP RECESS DL RD 10W 6K	-	12 N	₹ 1410.00
LHEHBRP5IL1W015	LED LUMINATO DEEP RECESS DL RD 15W 3K	-	12 N	₹ 1750.00
LHEHBRP6IL1W015	LED LUMINATO DEEP RECESS DL RD 15W 4K	-	12 N	₹ 1750.00
LHEHBRP7IL1W015	LED LUMINATO DEEP RECESS DL RD 15W 6K	-	12 N	₹ 1750.00
LHEHBRP5IL1W020	LED LUMINATO DEEP RECESS DL RD 20W 3K	-	12 N	₹ 2690.00
LHEHBRP6IL1W020	LED LUMINATO DEEP RECESS DL RD 20W 4K	-	12 N	₹ 2690.00
LHEHBRP7IL1W020	LED LUMINATO DEEP RECESS DL RD 20W 6K	-	12 N	₹ 2690.00
LHEEASPBIB1O005	Olivia LED Spot Light ABR 5W 3K	-	20 N	₹ 1800.00
LHEEASPDIB1O005	Olivia LED Spot Light ABR 5W 4K	-	20 N	₹ 1800.00
LHEEASPBIB1O010	Olivia LED Spot Light ABR 10W 3K	-	20 N	₹ 2075.00
LHEEASPDIB1O010	Olivia LED Spot Light ABR 10W 4K	-	20 N	₹ 2075.00
LHEEASPBIB1O020	Olivia LED Spot Light ABR 20W 3K	-	12 N	₹ 3115.00
LHEEASPDIB1O020	Olivia LED Spot Light ABR 20W 4K	-	12 N	₹ 3115.00
LHEEASPBIB1C005	Olivia LED Spot Light CRM 5W 3K	-	20 N	₹ 1800.00
LHEEASPDIB1C005	Olivia LED Spot Light CRM 5W 4K	-	20 N	₹ 1800.00
LHEEASPBIB1C010	Olivia LED Spot Light CRM 10W 3K	-	20 N	₹ 2075.00
LHEEASPDIB1C010	Olivia LED Spot Light CRM 10W 4K	-	20 N	₹ 2075.00
LHEEASPBIB1C020	Olivia LED Spot Light CRM 20W 3K	-	12 N	₹ 3115.00
LHEEASPDIB1C020	Olivia LED Spot Light CRM 20W 4K	-	12 N	₹ 3115.00

# PRICE LIST

Ordering code	Product description	Whole Sale (No.of unit/s)	Master Packing (No.of unit/s)	MRP Rs. ₹ Per Unit (Incl. of all taxes)
LHEEASPBIB1W005	Olivia LED Spot Light WHT 5W 3K		20 N	₹ 1700.00
LHEEASPDIB1W005	Olivia LED Spot Light WHT 5W 4K	-	20 N	₹ 1700.00
LHEEASPBIB1W010	Olivia LED Spot Light WHT 10W 3K	-	20 N	₹ 1975.00
LHEEASPDIB1W010	Olivia LED Spot Light WHT 10W 4K	-	20 N	₹ 1975.00
LHEEASPBIB1W020	Olivia LED Spot Light WHT 20W 3K	-	12 N	₹ 3015.00
LHEEASPDIB1W020	Olivia LED Spot Light WHT 20W 4K	-	12 N	₹ 3015.00
LSSLNB0065	Magnetic Recessed External Track	_	10 N	₹ 3550.00
LSSLNB0066	Magnetic Recessed Internal Track	_	10 N	₹ 3550.00
LSSLNB0067	Magnetic Surface Mounted Track	_	10 N	₹ 3550.00
LSSLNB0068	Recessed(External)Horizontal Cornerjoint	10 N	90 N	₹ 1650.00
LSSLNB0069	Recessed (External)Vertical Corner Joint	10 N	90 N	₹ 1650.00
LSSLNB0070	Recessed(Internal)Horizontal Cornerjoint	10 N	90 N	₹ 1650.00
LSSLNB0071	Recessed (Internal)Vertical Corner Joint	10 N	90 N	₹ 1650.00
LSSLNB0072	Magnetic Surface Mounted Corner Joint	10 N	90 N	₹ 1650.00
LSSLNB0084	Magnetic Surface Vertical Corner Joint	10 N	90 N	₹ 1650.00
LSSLNB0073	Magnetic Surface Mounted Connecting Pcs	10 N	160 N	₹ 295.00
LSSLNB0074	Magnetic Surface&Pendant Accessories	10 N	160 N	₹ 710.00
LSSLNB0075	Magnetic Input Power Connector	10 N	160 N	₹ 950.00
LSSLNB0076	Magnetic "I" Type Power Connector	10 N	160 N	₹ 950.00
LSSLNB0077	Magnetic "L" Type Power Connector	10 N	160 N	₹ 950.00
LSSLNB0078	Magnetic Power Supply Dc 48v 100w	-	4 N	₹ 4390.00
LSSLNB0079	Magnetic Power Supply Dc 48v 200w	-	4 N	₹ 6350.00
LHEFACPBPE1K007	LED Spotshine Magnetic Linear Light 7W 3K	_	4 N	₹ 1890.00
LHEFACPDPE1K007	LED Spotshine Magnetic Linear Light 7W 4K	_	4 N	₹ 1890.00
LHEFACPBPE1K012	LED Spotshine Magnetic Linearlight 12W 3K	_	4 N	₹ 2450.00
LHEFACPDPE1K012	LED Spotshine Magnetic Linearlight 12W 4K	_	4 N	₹ 2450.00
LHEFACP5PE1K020	LED Spotshine Magnetic Linearlight 20W 3K	_	2 N	₹ 3750.00
LHEFACP6PE1K020	LED Spotshine Magnetic Linearlight 20W 4K	_	2 N	₹ 3750.00
LHEFACP5PE1K030	LED Spotshine Magnetic Linearlight 30W 3K	_	2 N	₹ 5510.00
LHEFACP6PE1K030	LED Spotshine Magnetic Linearlight 30W 4K	_	2 N	₹ 5510.00
LHEFADP5PE1K006	LED Spotshine Magnetic Grilllight 6W 3K	_	4 N	₹ 1710.00
LHEFADP6PE1K006	LED Spotshine Magnetic Grilllight 6W 4K	_	4 N	₹ 1710.00
LHEFADP5PE1K012	LED Spotshine Magnetic Grilllight 12W 3K	_	4 N	₹ 2450.00
LHEFADP6PE1K012	LED Spotshine Magnetic Grilllight 12W 4K	_	4 N	₹ 2450.00
LHEFADP5PE1K018	LED Spotshine Magnetic Grilllight 18W 3K	_	2 N	₹ 3410.00
LHEFADP6PE1K018	LED Spotshine Magnetic Grilllight 18W 4K	_	2 N	₹ 3410.00
LHEFADP5PE1K024	LED Spotshine Magnetic Grilllight 24W 3K	_	2 N	₹ 4390.00
LHEFADP6PE1K024	LED Spotshine Magnetic Grilllight 24W 4K	_	2 N	₹ 4390.00
LHEFAEP5PE1K012	LED Spotshine Magnetic Foldlight 12W 3K	_	4 N	₹ 4150.00
LHEFAEP6PE1K012	LED Spotshine Magnetic Foldlight 12W 4K	_	4 N	₹ 4150.00
LHEFAEP5PE1K024	LED Spotshine Magnetic Foldlight 24W 3K	_	2 N	₹ 5050.00
LHEFAEP6PE1K024	LED Spotshine Magnetic Foldlight 24W 4K	_	2 N	₹ 5050.00
LHEFAFP5IH1K012	LED Spotshine Magnetic Tracklight 12W 3K	_	4 N	₹ 4450.00
LHEFAFP6PH1K012	LED Spotshine Magnetic Tracklight 12W 4K	_	4 N	₹ 4450.00
LHEFAFP5PE1K012	LED Spotshine Magnetic Pendantlight12W 3K	_	4 N	₹ 5290.00
LHEFAFP6PE1K012	LED Spotshine Magnetic Pendantlight12W 4K	_	4 N	₹ 5290.00

# PRICE LIST

Ordering code	Product description	Whole Sale (No.of unit/s)	Master Packing (No.of unit/s)	MRP Rs. ₹ Per Unit (Incl. of all taxes)
LHEEANPBPH1K007	LED STREEK Track Light 7W 3000K BLK	6 N	36 N	₹ 2760.00
LHEEANPBPH1W007	LED STREEK Track Light 7W 3000K WHT	6 N	36 N	₹ 2760.00
LHEEANPBPH1K012	LED STREEK Track Light 12W 3000K BLK	6 N	36 N	₹ 3450.00
LHEEANPBPH1W012	LED STREEK Track Light 12W 3000K WHT	6 N	36 N	₹ 3450.00
LHEEANPBPH1K020	LED STREEK Track Light 20W 3000K BLK	6 N	24 N	₹ 4140.00
LHEEANPBPH1W020	LED STREEK Track Light 20W 3000K WHT	6 N	24 N	₹ 4140.00
LHEEANPBPH1K030	LED STREEK Track Light 30W 3000K BLK	6 N	12 N	₹ 5290.00
LHEEANPBPH1W030	LED STREEK Track Light 30W 3000K WHT	6 N	12 N	₹ 5290.00
LHEEANPDPH1K007	LED STREEK Track Light 7W 4000K BLK	6 N	36 N	₹ 2760.00
LHEEANPDPH1W007	LED STREEK Track Light 7W 4000K WHT	6 N	36 N	₹ 2760.00
LHEEANPDPH1K012	LED STREEK TrackLight 12W 4000K BLK	6 N	36 N	₹ 3450.00
LHEEANPDPH1W012	LED STREEK TrackLight 12W 4000K WHT	6 N	36 N	₹ 3450.00
LHEEANPDPH1K020	LED STREEK TrackLight 20W 4000K BLK	6 N	24 N	₹ 4140.00
LHEEANPDPH1W020	LED STREEK TrackLight 20W 4000K WHT	6 N	24 N	₹ 4140.00
LHEEANPDPH1K030	LED STREEK TrackLight 30W 4000K BLK	6 N	12 N	₹ 5290.00
LHEEANPDPH1W030	LED STREEK TrackLight 30W 4000K WHT	6 N	12 N	₹ 5290.00
LSSLNW0192	LED STREEK Two Wire One Meter Track WHT	-	10 N	₹ 1150.00
LSSLNW0193	LED STREEK Two Wire AC Supply Conn. WHT	10 N	200 N	₹ 285.00
LSSLNW0194	LED STREEK Two Wire "I" Connector WHT	10 N	200 N	₹ 285.00
LSSLNW0195	LED STREEK Two Wire "L" Connector WHT	10 N	200 N	₹ 285.00
LSSLNW0196	LED STREEK Two Wire "T" Connector WHT	5 N	100 N	₹ 400.00
LSSLNB0027	LED STREEK Two Wire One Meter Track BLK	-	10 N	₹ 1150.00
LSSLNB0028	LED STREEK Two Wire AC Supply Conn. BLK	10 N	200 N	₹ 285.00
LSSLNB0029	LED STREEK Two Wire "I" Connector BLK	10 N	200 N	₹ 285.00
LSSLNB0030	LED STREEK Two Wire "L" Connector BLK	10 N	200 N	₹ 285.00
LSSLNB0031	LED STREEK Two Wire "T" Connector BLK	5 N	100 N	₹ 400.00
LHEHAJP6IL1J4X5	LED EBACT L-Shape Cabinet Light 4.5W 4K	4 N	24 N	₹ 2200.00
LHEHAJP6IL1W3X5	LED EBACT Square Cabinet Light 3.5W 4K	6 N	24 N	₹ 1400.00
LHEHAJP6IL1J004	LED EBACT Rect. Cabinet Light 4W 4K	6 N	24 N	₹ 1400.00
LHEHAJP6NL1J004	LED EBACT Rect. Cabinet Light 4W 4K Sen	6 N	24 N	₹ 2000.00
LHEHAJP6NE1J3X5	LED EBACT Oval Cabinet Light 3.5W 4K	4 N	24 N	₹ 2200.00
LHEHAJDIL1J3X5	LED EBACT Round Cabinet Light 3.5W 4K	6 N	24 N	₹ 1800.00
LSSLNW0228	EBACT Driver 15W 4 Way	4 N	24 N	₹ 1400.00
LSSLNW0229	EBACT Driver 30W 6 Way	4 N	24 N	₹ 2300.00
LSSLNW0230	EBACT Connection Box 3 Way	8 N	48 N	₹ 400.00
LSSLNW0231	EBACT Connection Box 6 Way	8 N	48 N	₹ 500.00
LSSLNW0232	EBACT Connection Cable 1M	8 N	48 N	₹ 100.00
LSSLNW0233	EBACT Connection Cable 2M	8 N	48 N	₹ 200.00

---

**REGIONAL & BRANCH OFFICES:**

**NORTH - REGIONAL OFFICE: Corporate Office:** QRG Towers, 2D, Sector-126, Expressway, Noida-201304, Tel: 0120-3331000, **Delhi:** Tel: 011-47676700, 23888200, **Chandigarh:** Tel: 0172-4232400-401, **Dehradun:** Tel: 0135-6670202, **Haldwani:** Tel: 05946-222935/222933, **Noida / Haryana:** Tel: 0120-3331000, **Ludhiana:** Tel: 0161-4676000 / 24, **Amritsar:** Tel: 0183-5202400/401, **Jammu:** Tel: 0191-2478330, 2479330, **SriNagar:** Tel: 0194-2490431, **Jaipur:** Tel: 0141-3914645, 3988210, **Jodhpur:** Tel: 0291-9214201640/45, **Lucknow:** Tel: 0522-6672100, **Kanpur:** Tel: 0512-6710400, 6710409

**EAST - REGIONAL OFFICE: Kolkata:** ICC Tower, 5th Floor, 4 India Exchange Place, Kolkata-700001, Tel: 033-40129851 / 52, **Bhubaneshwar:** Tel: 0674-6668101/102/103/104, **Guwahati:** Tel: 0361-2134521, 2458923, 2460355, **Siliguri:** Tel: 0353-2525907, **Ranchi:** 0651-2244861, 2244862, 2244864, 2244868, 2244869, **Jamshedpur:** Tel: 0657-6542492, 09234369436, **Patna:** Tel: 0612-2207221, 2207222, 2207223, 2655518

**WEST - REGIONAL OFFICE: Mumbai:** 14th Floor, Unit No. 1405- 1408, Lodha Supremus, I- Think Techno Campus, Kanjurmarg East, Mumbai- 400 042. Ph.: 022 - 67298600-601, **Ahmedabad:** Tel: 079-40061111, 40060738-740, Indore: Tel: 0731-2572340-41, 4009998 (Airtel), **Rajkot:** Tel: 0281-2481112, 2921212, **Nagpur:** Tel: 0712-2240932, 2242692, 2242699 **Pune:** Tel: 020-64016413 / 14, **Raipur:** Tel: 0771-4243400 / 01, **Surat:** Tel: 0261-2350137, 9979890137, **Jabalpur:** Tel: 0761-4064491, **Bhopal:** 0755-4271544, 0755-4011025

**SOUTH - REGIONAL OFFICE: Chennai:** Khivraj Complex -1, 1st Floor, No.480, Annasalai, Nandanam, Chennai – 600035 Phone: 044: 42280600, **Bangalore:** Tel: 080-49075000, **Coimbatore:** Phone: 0422- 4550200 / 287, **Hyderabad:** Tel: 040-27533372, 27533355, 27533632, 66320407/0408/6401/6402, **Kochi:** Tel: 0484-4099000, **Vizag:** Tel: 0891-6514339, **Vijayawada:** Tel: +91-9247058847/57, **Calicut:** 0495-4019194, **Trivandrum:** 0471-4015323, **Hubli:** 09448146028

**Representative Offices:** • Goa • Solapur • Gwalior • Kathmandu • Kolhapur • Vadodara

---

"Actual products may vary in colour, design, description and colour combination etc. Although every effort has been made to ensure accuracy in the compilation of the technical detail within this publication. Specifications & performance data are constantly changing."



# HAVELLS

## Havells India Ltd.

QRG Towers, 2D, Sector -126, Expressway, Noida - 201 304 (UP), Ph. +91-120-3331000,

E-mail: [marketing@havells.com](mailto:marketing@havells.com), [www.havells.com](http://www.havells.com)

Customer Care No. 08045 77 1313

Join us on Facebook at [www.facebook.com/havells](http://www.facebook.com/havells) and share your ways to save the planet!

CIN - L31900DL1983PLC016304.

Copyright Subsists. Imitation of trade dress, graphics and color scheme of this document is a punishable offence.

Scan the QR Code  
to download  
Havells mCatalogue

